



# Trion<sup>®</sup> Packaging User Guide

---

UG-TRION-PKG-v5.3  
June 2025  
[www.elitestek.com](http://www.elitestek.com)



# Contents

|                                                                |           |
|----------------------------------------------------------------|-----------|
| <b>Introduction.....</b>                                       | <b>3</b>  |
| Available Package Options.....                                 | 3         |
| Device Pinout File.....                                        | 4         |
| <b>Pinout Description.....</b>                                 | <b>4</b>  |
| <b>49-Ball FBGA Package Specifications.....</b>                | <b>8</b>  |
| <b>80-Ball WLCSP Package Specifications.....</b>               | <b>11</b> |
| <b>81-Ball FBGA Package Specifications.....</b>                | <b>14</b> |
| <b>100-Lead LQFP Package Specifications.....</b>               | <b>17</b> |
| <b>144-Lead LQFP Package Specifications.....</b>               | <b>20</b> |
| <b>169-Ball FBGA Package Specifications.....</b>               | <b>23</b> |
| <b>256-Ball FBGA Package Specifications.....</b>               | <b>26</b> |
| T13 and T20 FPGAs.....                                         | 26        |
| T35 FPGAs.....                                                 | 28        |
| <b>324-Ball FBGA Package Specifications.....</b>               | <b>32</b> |
| T20 and T35 FPGAs.....                                         | 33        |
| T55, T85, and T120 FPGAs.....                                  | 36        |
| <b>400-Ball FBGA Package Specifications.....</b>               | <b>39</b> |
| <b>484-Ball FBGA Package Specifications.....</b>               | <b>42</b> |
| <b>576-Ball FBGA Package Specifications.....</b>               | <b>45</b> |
| <b>Solder Reflow Guidelines for Surface-Mount Devices.....</b> | <b>48</b> |
| Reflow.....                                                    | 48        |
| Inspection.....                                                | 48        |
| BGA Reballing.....                                             | 48        |
| Peak Reflow Temperatures.....                                  | 48        |
| Reflow Profile for SMT Packages.....                           | 49        |
| <b>Thermal Resistance.....</b>                                 | <b>51</b> |
| <b>PCB Guidelines for BGA Packages.....</b>                    | <b>52</b> |
| PCB Solder Pad Guidelines.....                                 | 52        |
| Routing between Pads on the Top Layer.....                     | 54        |
| Guidelines for Vias.....                                       | 55        |
| Routing through Different PCB Layers.....                      | 56        |
| <b>PCB Guidelines for QFP Packages.....</b>                    | <b>57</b> |
| PCB Solder Pad (LQFP Packages).....                            | 57        |
| <b>Trion® FPGAs Solder Ball.....</b>                           | <b>58</b> |
| <b>Green Packaging.....</b>                                    | <b>58</b> |
| <b>Tape and Reel Packaging.....</b>                            | <b>59</b> |
| <b>Tray Packaging.....</b>                                     | <b>62</b> |
| <b>Revision History.....</b>                                   | <b>63</b> |

# Introduction

Elitestek offers Trion® FPGAs in packages that are designed for the devices' maximum number of user's I/O pins. This document describes the Trion® FPGAs' pin and package specifications as well as solder reflow guidelines.



**Learn more:** Refer to the following documents for more information:

FPGA pinout specification

FPGA data sheet for pin definitions

## Available Package Options

**Table 1: Available Packages**

| Package                     | Dimensions (mm x mm) | Pitch (mm) |
|-----------------------------|----------------------|------------|
| <b>T4/T8 FPGAs</b>          |                      |            |
| 49-ball FBGA <sup>(1)</sup> | 3 x 3                | 0.4        |
| 81-ball FBGA                | 5 x 5                | 0.5        |
| <b>T20 FPGAs</b>            |                      |            |
| 80-ball WLCSP               | 4.5 x 3.6            | 0.4        |
| <b>T8/T20 FPGAs</b>         |                      |            |
| 144-pin LQFP                | 20 x 20              | 0.5        |
| <b>T13/T20 FPGAs</b>        |                      |            |
| 100-pin LQFP                | 14 x 14              | 0.5        |
| 169-ball FBGA               | 9 x 9                | 0.65       |
| <b>T13/T20/T35 FPGAs</b>    |                      |            |
| 256-ball FBGA               | 13 x 13              | 0.8        |
| <b>T20/T35 FPGAs</b>        |                      |            |
| 324-ball FBGA               | 12 x 12              | 0.65       |
| 400-ball FBGA               | 16 x 16              | 0.8        |
| <b>T55/T85/T120 FPGAs</b>   |                      |            |
| 324-ball FBGA               | 12 x 12              | 0.65       |
| 484-ball FBGA               | 18 x 18              | 0.80       |
| 576-ball FBGA               | 16 x 16              | 0.65       |

Refer to the FPGA data sheet for information on the number of GPIO and other resources in each FPGA/package combination.

<sup>(1)</sup> This package does not have dedicated JTAG pins (TDI, TDO, TCK, TMS).

## Device Pinout File

Elitestek provides pinout files for Trion® FPGAs. For each device/package combination, these files contain the pin name, I/O bank number for each pin, configuration function, and pin location.

## Pinout Description

The following tables describe the pinouts for power, ground, configuration, and interfaces.

**Table 2: General Pinouts**

| Function                                             | Group                  | Direction | Description                                                                                                                                                                                                                                                                                                                                                                                                                                     |
|------------------------------------------------------|------------------------|-----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| VCC                                                  | Power                  | –         | Core power supply.                                                                                                                                                                                                                                                                                                                                                                                                                              |
| VCCA_xx                                              | Power                  | –         | PLL analog power supply. xx indicates the location.                                                                                                                                                                                                                                                                                                                                                                                             |
| VCCIOxx                                              | Power                  | –         | I/O pin power supply. xx indicates the bank location.                                                                                                                                                                                                                                                                                                                                                                                           |
| VCCIOxx_yy_zz                                        | Power                  | –         | I/O pin power supply.<br>Power for I/O banks that are shorted together. xx, yy, and zz are the bank locations.                                                                                                                                                                                                                                                                                                                                  |
| GND                                                  | Ground                 | –         | Ground.                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| CLK $n$                                              | Alternate              | Input     | Global clock network input. $n$ is the number. The number of inputs is package dependent.                                                                                                                                                                                                                                                                                                                                                       |
| CTRL $n$                                             | Alternate              | Input     | Global network input used for high fanout and global reset. $n$ is the number. The number of inputs is package dependent.                                                                                                                                                                                                                                                                                                                       |
| PLLIN                                                | Alternate              | Input     | PLL reference clock.                                                                                                                                                                                                                                                                                                                                                                                                                            |
| GNDA_PLL                                             | Ground                 | –         | PLL ground pin.                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| MREFCLK                                              | Alternate              | Input     | MIPI TX PLL reference clock source.                                                                                                                                                                                                                                                                                                                                                                                                             |
| GPIOx_ $n$                                           | GPIO                   | I/O       | General-purpose I/O for user function. User I/O pins are single-ended.<br>$x$ : Indicates the bank (L or R)<br>$n$ : Indicates the GPIO number.                                                                                                                                                                                                                                                                                                 |
| GPIOx_ $n$ _yyy<br>GPIOx_ $n$ _yyy_zzz<br>GPIOx_zzzn | GPIO<br>Multi-Function | I/O       | Multi-function, general-purpose I/O. These pins are single ended. If these pins are not used for their alternate function, you can use them as user I/O pins.<br>$x$ : (T4) Indicates the bank; left (L) or right (R).<br>$x$ : (T13/T20) Indicates the bank; left (L), right (R), or bottom (B).<br>$n$ : Indicates the GPIO number.<br>$yyy$ , $yyy\_zzz$ : Indicates the alternate function.<br>$zzzn$ : Indicates LVDS TX or RX and number. |
| TXN $n$ , TXP $n$                                    | LVDS                   | I/O       | LVDS transmitter (TX). $n$ : Indicates the number.                                                                                                                                                                                                                                                                                                                                                                                              |
| RXN $n$ , RXP $n$                                    | LVDS                   | I/O       | LVDS receiver (RX). $n$ : Indicates the number.                                                                                                                                                                                                                                                                                                                                                                                                 |
| CLKN $n$ , CLKP $n$                                  | LVDS                   | I/O       | Dedicated LVDS receiver clock input. $n$ : Indicates the number.                                                                                                                                                                                                                                                                                                                                                                                |
| RXN $n$ _EXTFB $n$<br>RXP $n$ _EXTFB $n$             | LVDS                   | I/O       | LVDS PLL external feedback. $n$ : Indicates the number.                                                                                                                                                                                                                                                                                                                                                                                         |
| REF_RES                                              | –                      | –         | REF_RES is a reference resistor to generate constant current for LVDS TX. Connect a 12 k $\Omega$ resistor with a tolerance of $\pm 1\%$ to the REF_RES pin with respect to ground. If none of the pins in a bank are used for LVDS, leave this pin floating.                                                                                                                                                                                   |

**Table 3: Dedicated Configuration Pins**

These pins cannot be used as general-purpose I/O after configuration.

All the pins are in internal weak pull-up during configuration except for TCK and TDO.

| Pins     | Direction | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | External Weak Pull-Up/<br>Pull Down Requirement |
|----------|-----------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------|
| CDONE    | I/O       | Configuration done status pin. CDONE is an open drain output; connect it to an external pull-up resistor to VCCIO. When CDONE = 1, the configuration is complete and the FPGA enters user mode. You can hold CDONE low and release it to synchronize the FPGAs entering user mode.                                                                                                                                                                                           | Pull up                                         |
| CRESET_N | Input     | Active-low FPGA reset and re-configuration trigger.<br>Pulse CRESET_N low for a duration of $t_{\text{creset\_N}}$ before releasing CRESET_N from low to high to initiate FPGA re-configuration. This pin does not perform a system reset.                                                                                                                                                                                                                                   | Pull up                                         |
| TCK      | Input     | JTAG test clock input (TCK). The rising edge loads signals applied at the TAP input pins (TMS and TDI). The falling edge clocks out signals through the TAP TDO pin.                                                                                                                                                                                                                                                                                                         | Pull up                                         |
| TMS      | Input     | JTAG test mode select input (TMS). The I/O sequence on this input controls the test logic operation. The signal value typically changes on the falling edge of TCK. TMS has an internal weak pull-up; when it is not driven by an external source, the test logic perceives a logic 1.                                                                                                                                                                                       | Pull up                                         |
| TDI      | Input     | JTAG test data input (TDI). Data applied at this serial input is fed into the instruction register or into a test data register depending on the sequence previously applied at TMS. Typically, the signal applied at TDI changes state following the falling edge of TCK while the registers shift in the value received on the rising edge. Like TMS, TDI has an internal weak pull-up; when it is not driven from an external source, the test logic perceives a logic 1. | Pull up                                         |
| TDO      | Output    | JTAG test data output (TDO). This serial output from the test logic is fed from the instruction register or a test data register depending on the sequence previously applied at TMS. The shift out content is based on the issued instruction. The signal driven through TDO changes state following the falling edge of TCK. When data is not being shifted through the device, TDO is set to an inactive drive state (e.g., high-impedance).                              | Pull up                                         |



**Note:** All dedicated configuration pins have Schmitt Trigger buffer. Refer to the respective Trion FPGAs datasheet for the Schmitt Trigger buffer specifications in **Single Ended I/O and Dedicated Configuration Pins Schmitt Trigger Buffer** table.

**Table 4: Dual-Purpose Configuration Pins**

In user mode (after configuration), you can use these dual-purpose pins as general I/O.

| Pins         | Direction | Description                                                                                                                                                                                                                                                                                                                                                                                                      | Use External Weak Pull-Up                     |
|--------------|-----------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------|
| CBUS[2:0]    | Input     | Configuration bus width select. CBUS has an internal weak pull-up. However, Elitestek recommends that you use an external pull-up accordingly. See <i>Selecting the Configuration Mode</i> in AN 006: Configuring Trion FPGAs                                                                                                                                                                                    | Pull up or pull down <sup>(2)</sup>           |
| CBSEL[1:0]   | Input     | Optional multi-image selection input (if external multi-image configuration mode is enabled).                                                                                                                                                                                                                                                                                                                    | Pull up or pull down <sup>(3)</sup>           |
| CCK          | I/O       | Passive SPI input configuration clock or active SPI output configuration clock (active low). Includes an internal weak pull-up.<br><br> <b>Important:</b> The CCK pin in Q100F3 packages are only available in user mode when the LVDS TX resources are not in use. The CCK pin should not be toggled when any LVDS TX is used. | Optional pull up if required by external load |
| CDI $n$      | I/O       | $n$ is a number from 0 to 31 depending on the SPI configuration.<br>0: Passive serial data input or active serial output.<br>1: Passive serial data output or active serial input.<br>$n$ : Parallel I/O.<br>In multi-bit daisy chain connection, the CDI (31:0) connects to the data bus in parallel.                                                                                                           | Optional pull up if required by external load |
| CSI          | Input     | Chip select.<br>0: The FPGA is not selected or enabled and will not be configured.<br>1: Selects the FPGA for all configuration modes. CSI must remain high throughout all configuration modes.                                                                                                                                                                                                                  | Pull up                                       |
| CSO          | Output    | Chip select output. Selects the next device for cascading configuration.                                                                                                                                                                                                                                                                                                                                         | N/A                                           |
| NSTATUS      | Output    | Status (active low).<br>Indicates a configuration error. When the FPGA drives this pin low, it indicates an ID mismatch, the bitstream CRC check has failed, or remote update has failed.<br>For Trion® T4, T8 BGA49, and T8 BGA81 FPGAs, logic low indicates a configuration error due to ID mismatch.                                                                                                          | N/A                                           |
| SS_N         | I/O       | SPI configuration mode select. The FPGA senses the value of SS_N when it comes out of reset (i.e., CRESET_N transitions from low to high).<br>0: SPI Passive mode; connect to external weak pull down.<br>1: SPI Active mode; connect to external weak pull up.<br>In active configuration mode, SS_N is an active-low chip select to the flash device (CDI0 - CDI3).                                            | Pull up or pull down                          |
| TEST_N       | Input     | Active-low test mode enable signal. Set to 1 to disable test mode.<br>During all configuration modes, rely on the external weak pull-up or drive this pin high.                                                                                                                                                                                                                                                  | Pull up                                       |
| RESERVED_OUT | Output    | Reserved pin during user configuration. This pin drives high during user configuration.<br>F49 and F81 packages only.                                                                                                                                                                                                                                                                                            | N/A                                           |

<sup>(2)</sup> Optional for x1 mode.

<sup>(3)</sup> Not applicable to single-image or remote update.

**Table 5: MIPI Pinouts (Dedicated)***n* indicates the number. *L* indicates the lane

| Function                                             | Group  | Direction | Description                           |
|------------------------------------------------------|--------|-----------|---------------------------------------|
| VCC25A_MIPI0<br>VCC25A_MIPI1                         | Power  | –         | MIPI 2.5 V analog power supply.       |
| VCC12A_MIPI0_TX<br>VCC12A_MIPI1_TX                   | Power  | –         | MIPI 1.2 V TX analog power supply.    |
| VCC12A_MIPI0_RX<br>VCC12A_MIPI1_RX                   | Power  | –         | MIPI 1.2 V RX analog power supply.    |
| GND_A_MIPI                                           | Ground | –         | Ground for MIPI analog power supply.  |
| MIPI <sub>n</sub> _TXDPL<br>MIPI <sub>n</sub> _TXDNL | MIPI   | I/O       | MIPI differential transmit data lane. |
| MIPI <sub>n</sub> _RXDPL<br>MIPI <sub>n</sub> _RXDNL | MIPI   | I/O       | MIPI differential receive data lane.  |
| MREFCLK                                              | Clock  | Input     | MIPI PLL reference clock source.      |

**Table 6: DDR Pinouts (Dedicated)***n* indicates the number.

| Function              | Direction | Description                                              |
|-----------------------|-----------|----------------------------------------------------------|
| VCCIO_DDR             | –         | DDR power supply.                                        |
| DDR_A[ <i>n</i> ]     | Output    | Address signals to the memories.                         |
| DDR_BA[ <i>n</i> ]    | Output    | Bank signals to the memories.                            |
| DDR_CAS_N             | Output    | Active-low column address strobe signal to the memories. |
| DDR_CKE               | Output    | Active-high clock enable signals to the memories.        |
| DDR_CK<br>DDR_CK_N    | Output    | Differential clock output pins to the memories.          |
| DDR_CS_N              | Output    | Active-low chip select signals to the memories.          |
| DDR_DQ[ <i>n</i> ]    | I/O       | Data bus to/from the memories.                           |
| DDR_DM[ <i>n</i> ]    | Output    | Active-high data-mask signals to the memories.           |
| DDR_DQS_N[ <i>n</i> ] | I/O       | Differential data strobes to/from the memories.          |
| DDR_DQS[ <i>n</i> ]   | I/O       | Differential data strobes to/from the memories.          |
| DDR_ODT               | Output    | ODT signal to the memories.                              |
| DDR_RAS_N             | Output    | Active-low row address strobe signal to the memories.    |
| DDR_RST_N             | Output    | Active-low reset signals to the memories.                |
| DDR_WE_N              | Output    | Active-low write enable strobe signal to the memories.   |
| DDR_VREF              | I/O       | Reference voltage.                                       |
| DDR_ZQ                | I/O       | ZQ calibration pin.                                      |

**Table 7: SPI Flash Memory Pin**

| Function | Direction | Description                                                                            |
|----------|-----------|----------------------------------------------------------------------------------------|
| SPI_CS_N | Input     | Active-low internal SPI flash memory chip select. Available in QFP100F3 packages only. |

# 49-Ball FBGA Package Specifications

The following figures show the pin, I/O bank locations, package top-side marking, and outlines for this package. FPGAs in this package are pin compatible.

**Figure 1: 49-Ball FBGA Pinout Diagram**

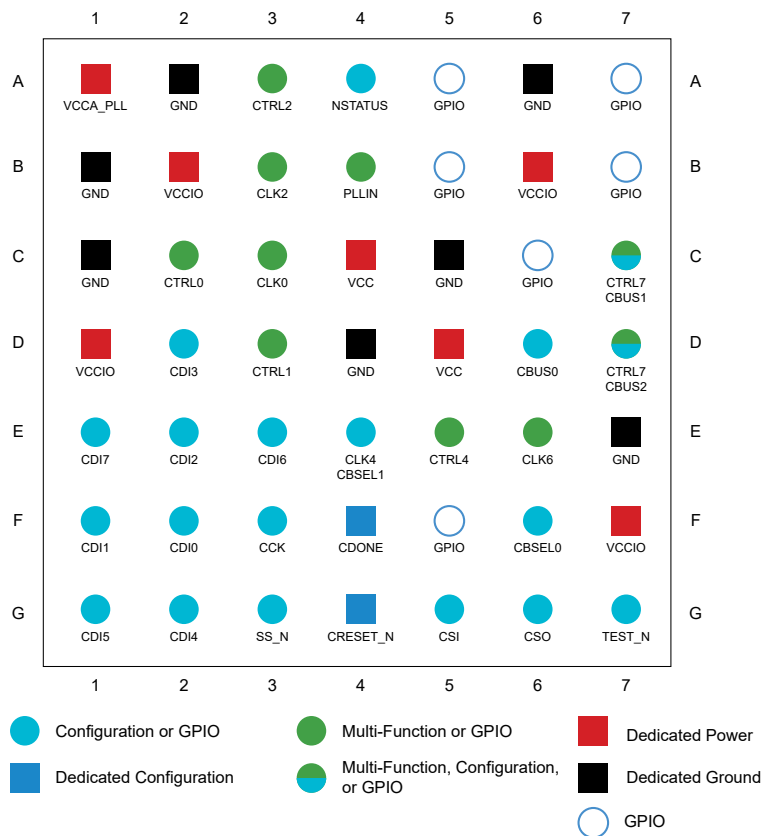


Figure 2: 49-Ball FBGA I/O Bank Diagram



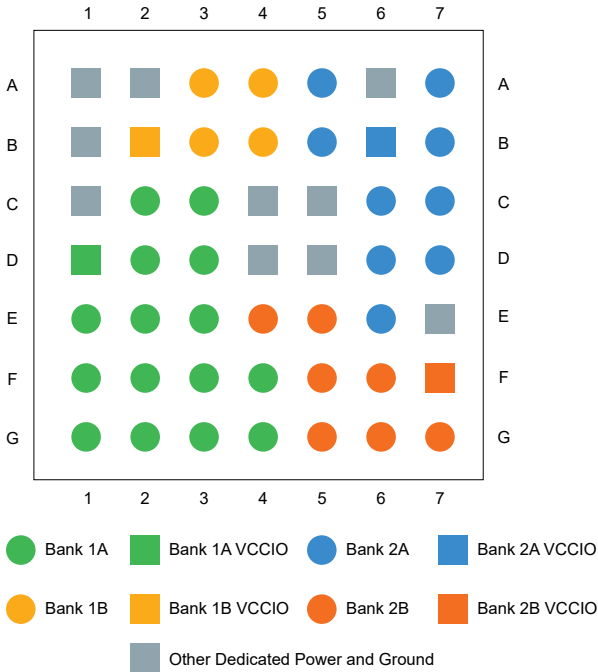


Figure 3: 49-Ball FPGA Package Marking

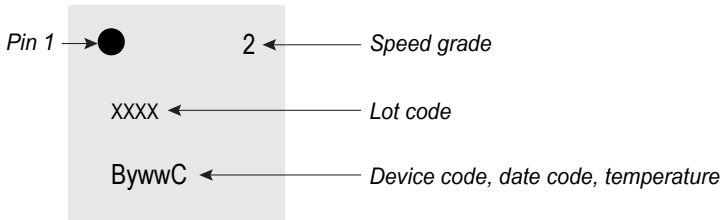

**Figure 4: 49-Ball FBGA Package Outline**

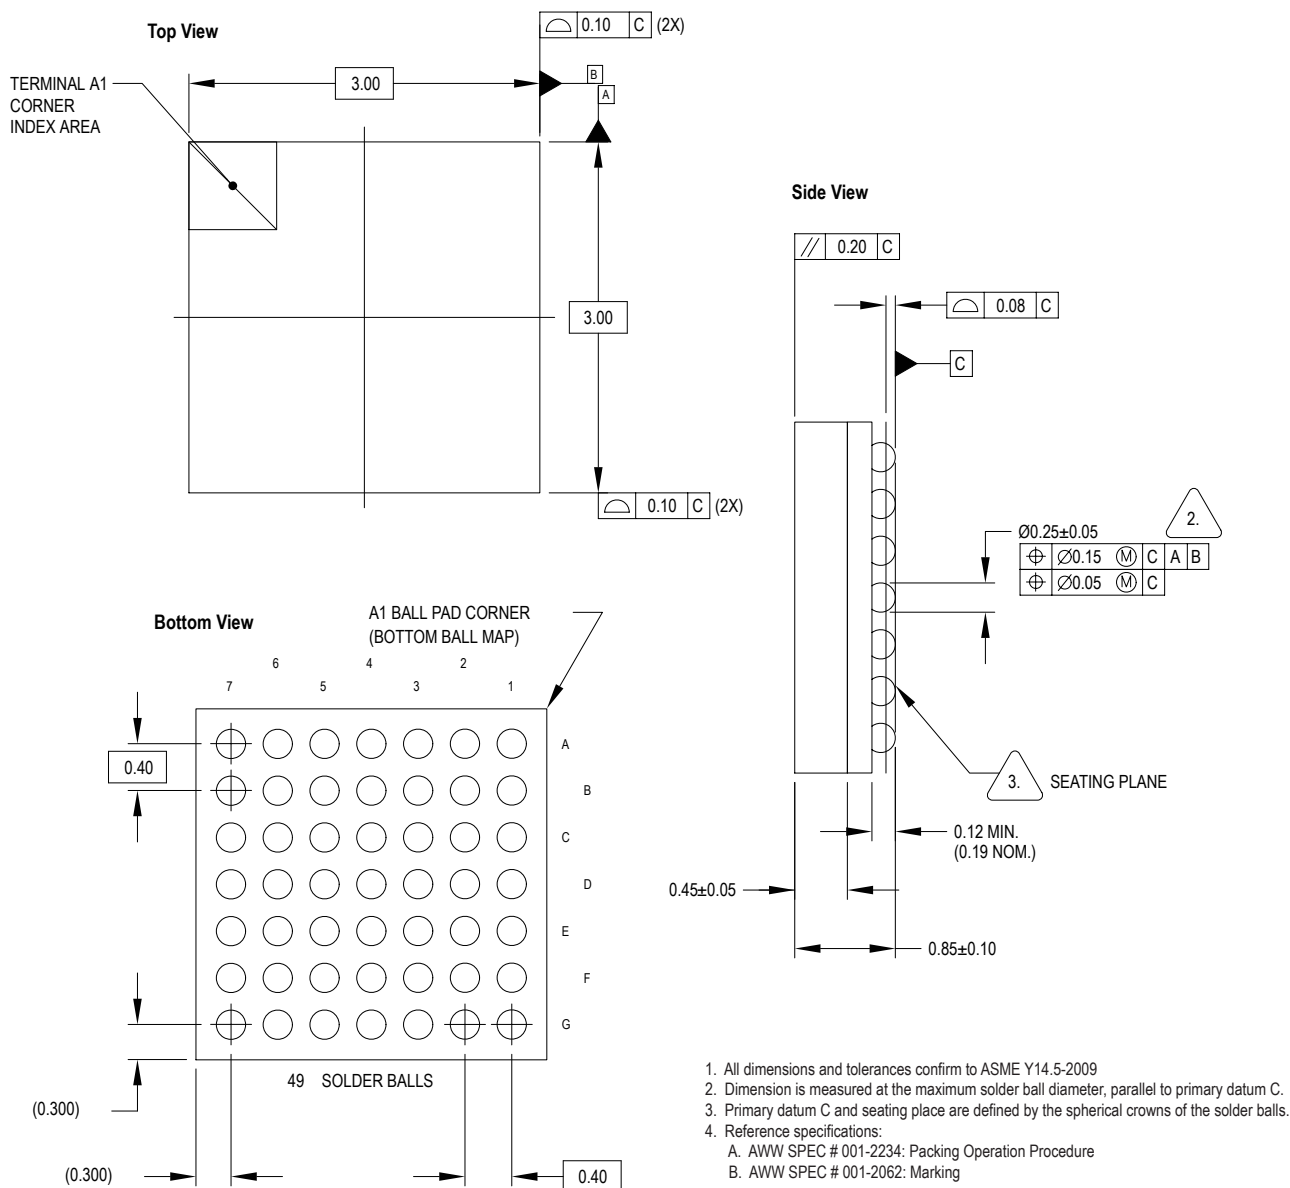

# 80-Ball WLCSP Package Specifications

The following figures show the pin, I/O bank locations, package top-side marking, and outlines for this package. FPGAs in this package are pin compatible.

**Figure 5: 80-Ball WLCSP Pinout Diagram**

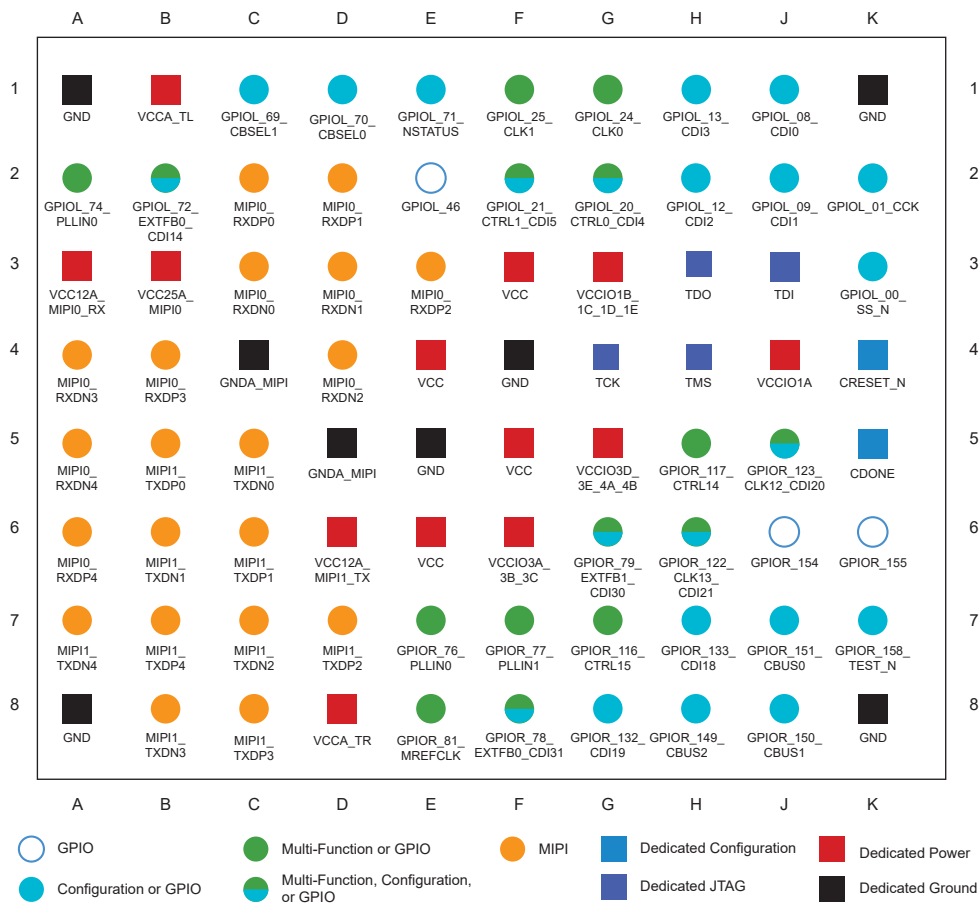


Figure 6: 80-Ball WLCSP I/O Bank Diagram



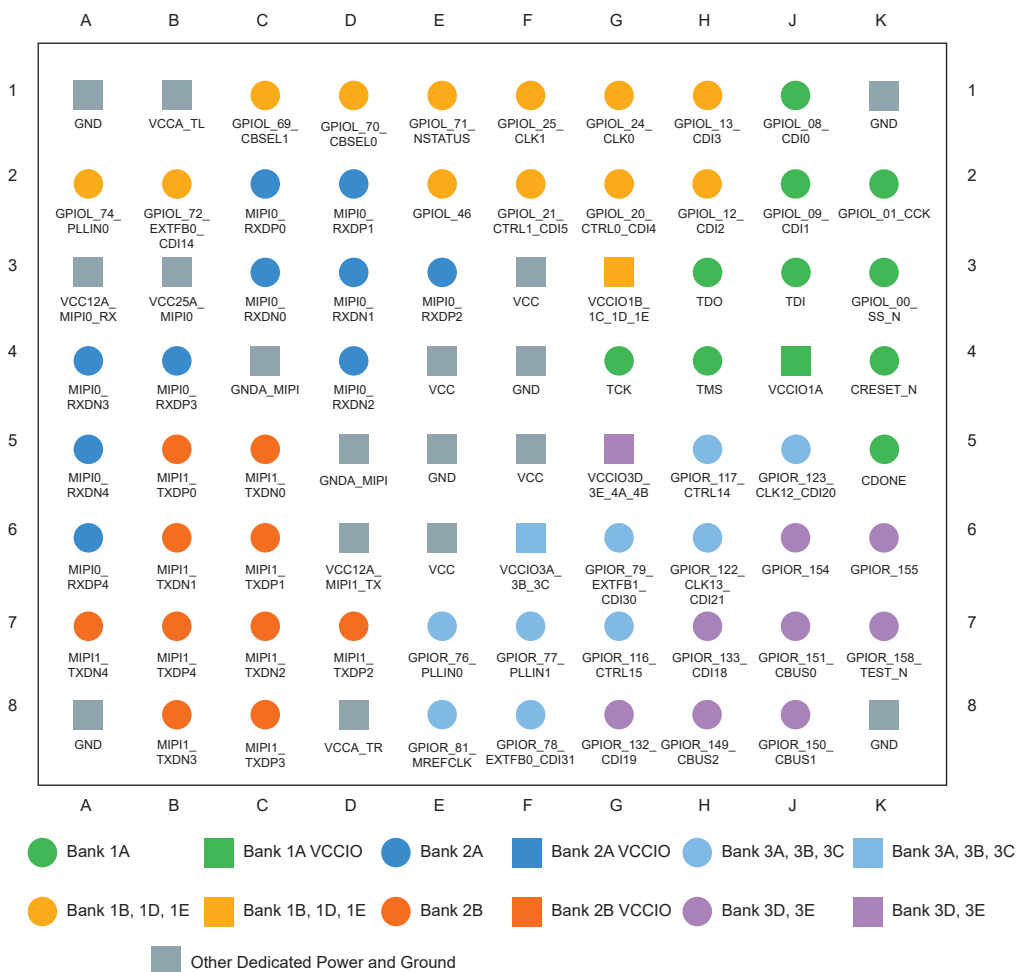


Figure 7: 80-Ball WLCSP Package Marking

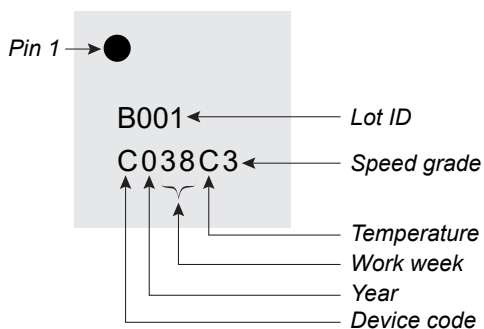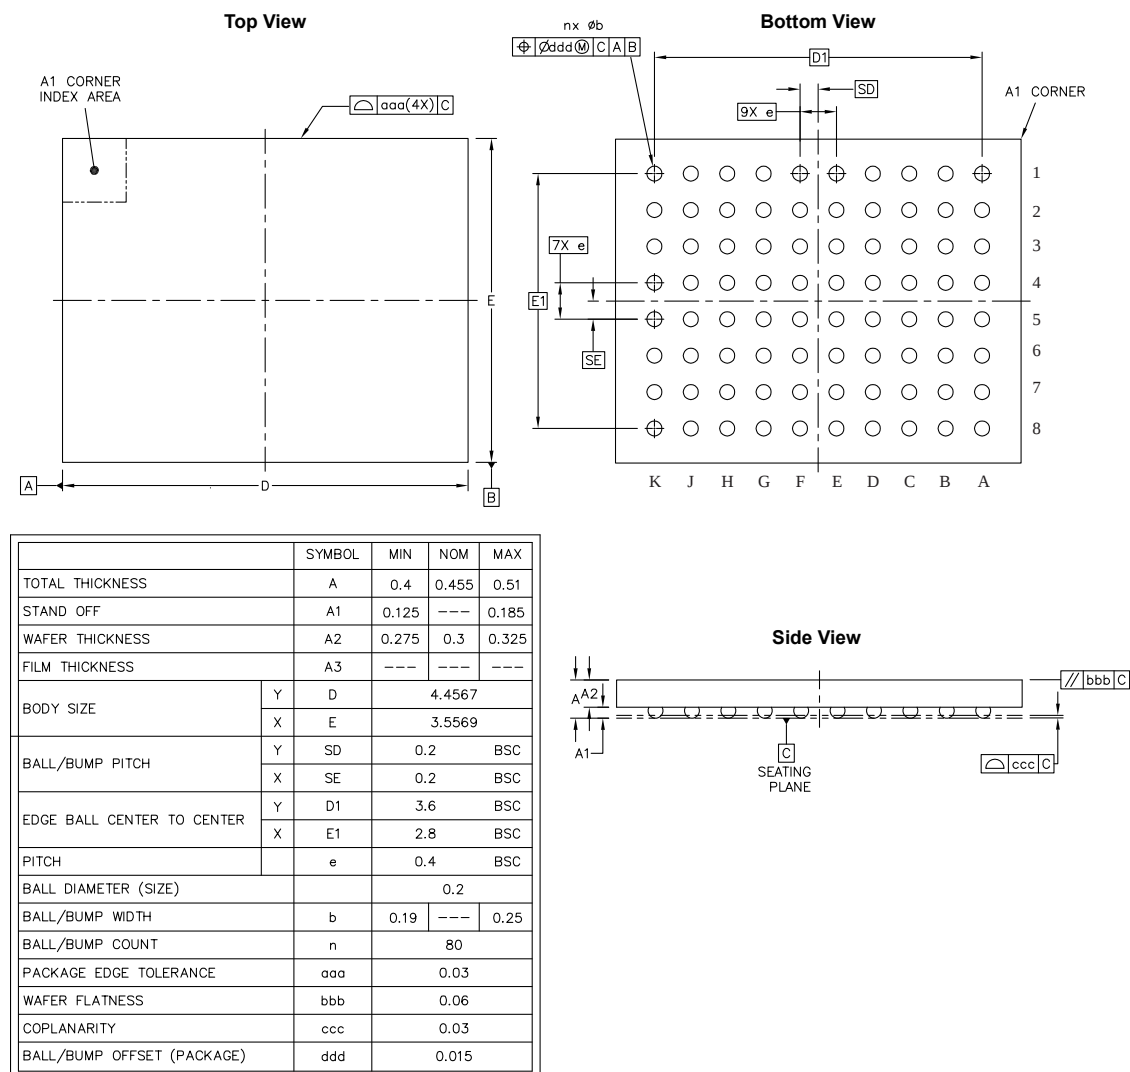


**Figure 8: 80-Ball WLCSP Package Outline**


# 81-Ball FBGA Package Specifications

The following figures show the pin, I/O bank locations, package top-side marking, and outlines for this package. FPGAs in this package are pin compatible.

**Figure 9: 81-Ball FBGA Pinout Diagram**

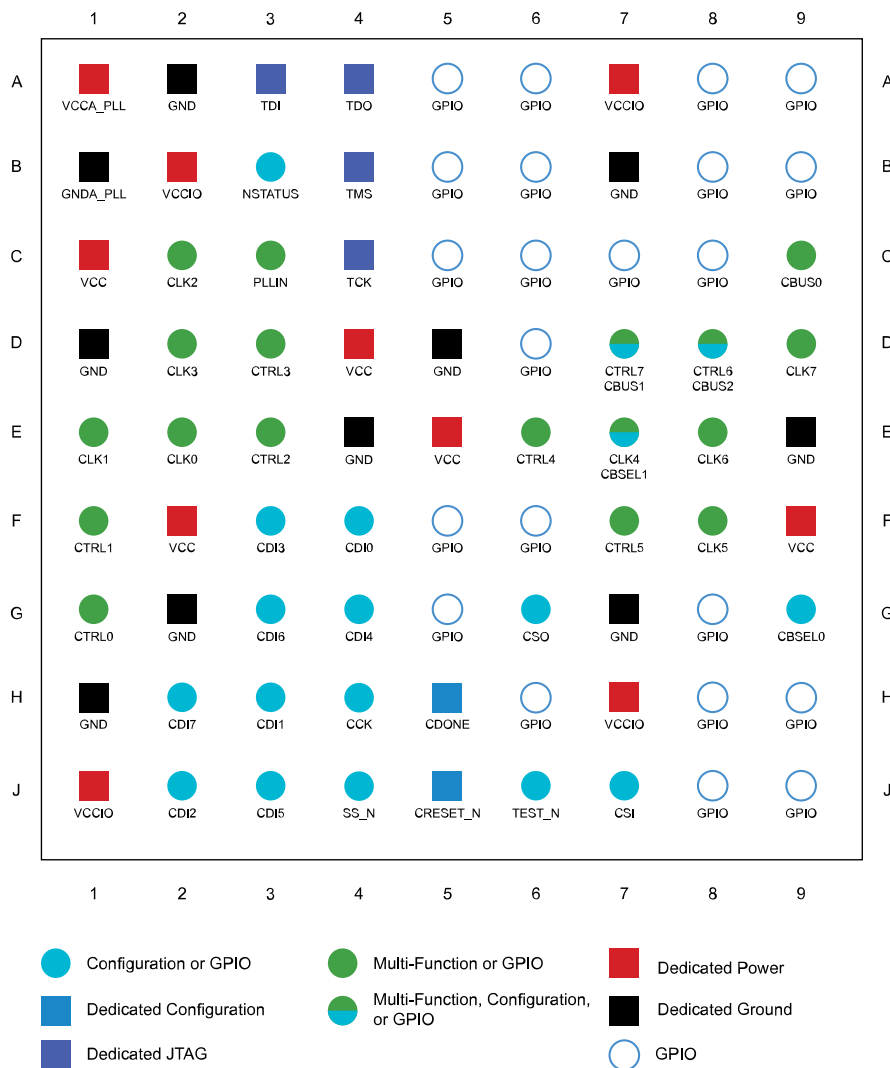



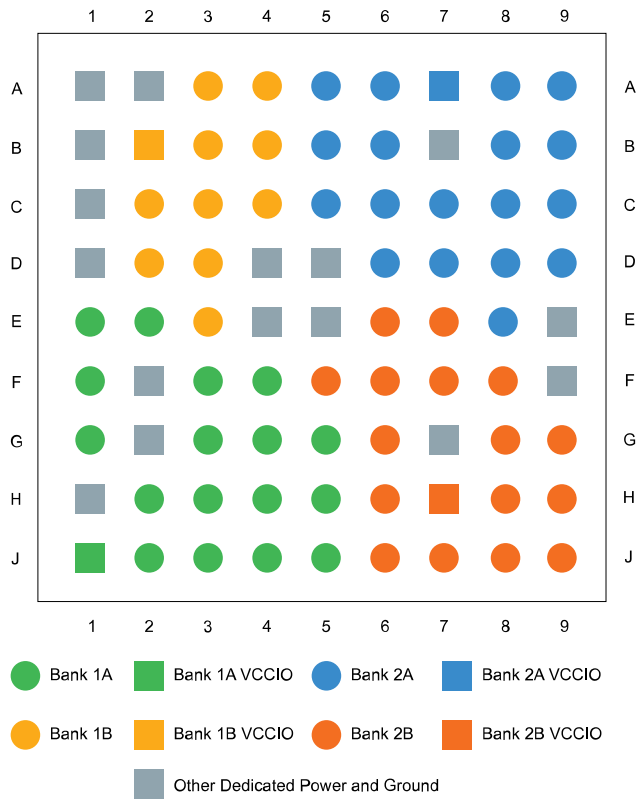
**Figure 10: 81-Ball FBGA I/O Bank Diagram****Figure 11: 81-Ball FPGA Package Marking**

Figure 12: 81-Ball FBGA Package Outline

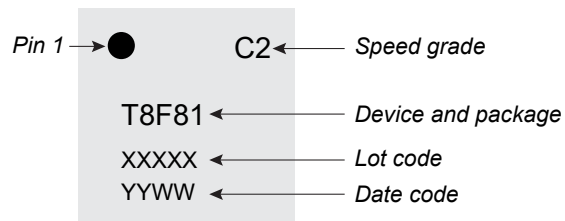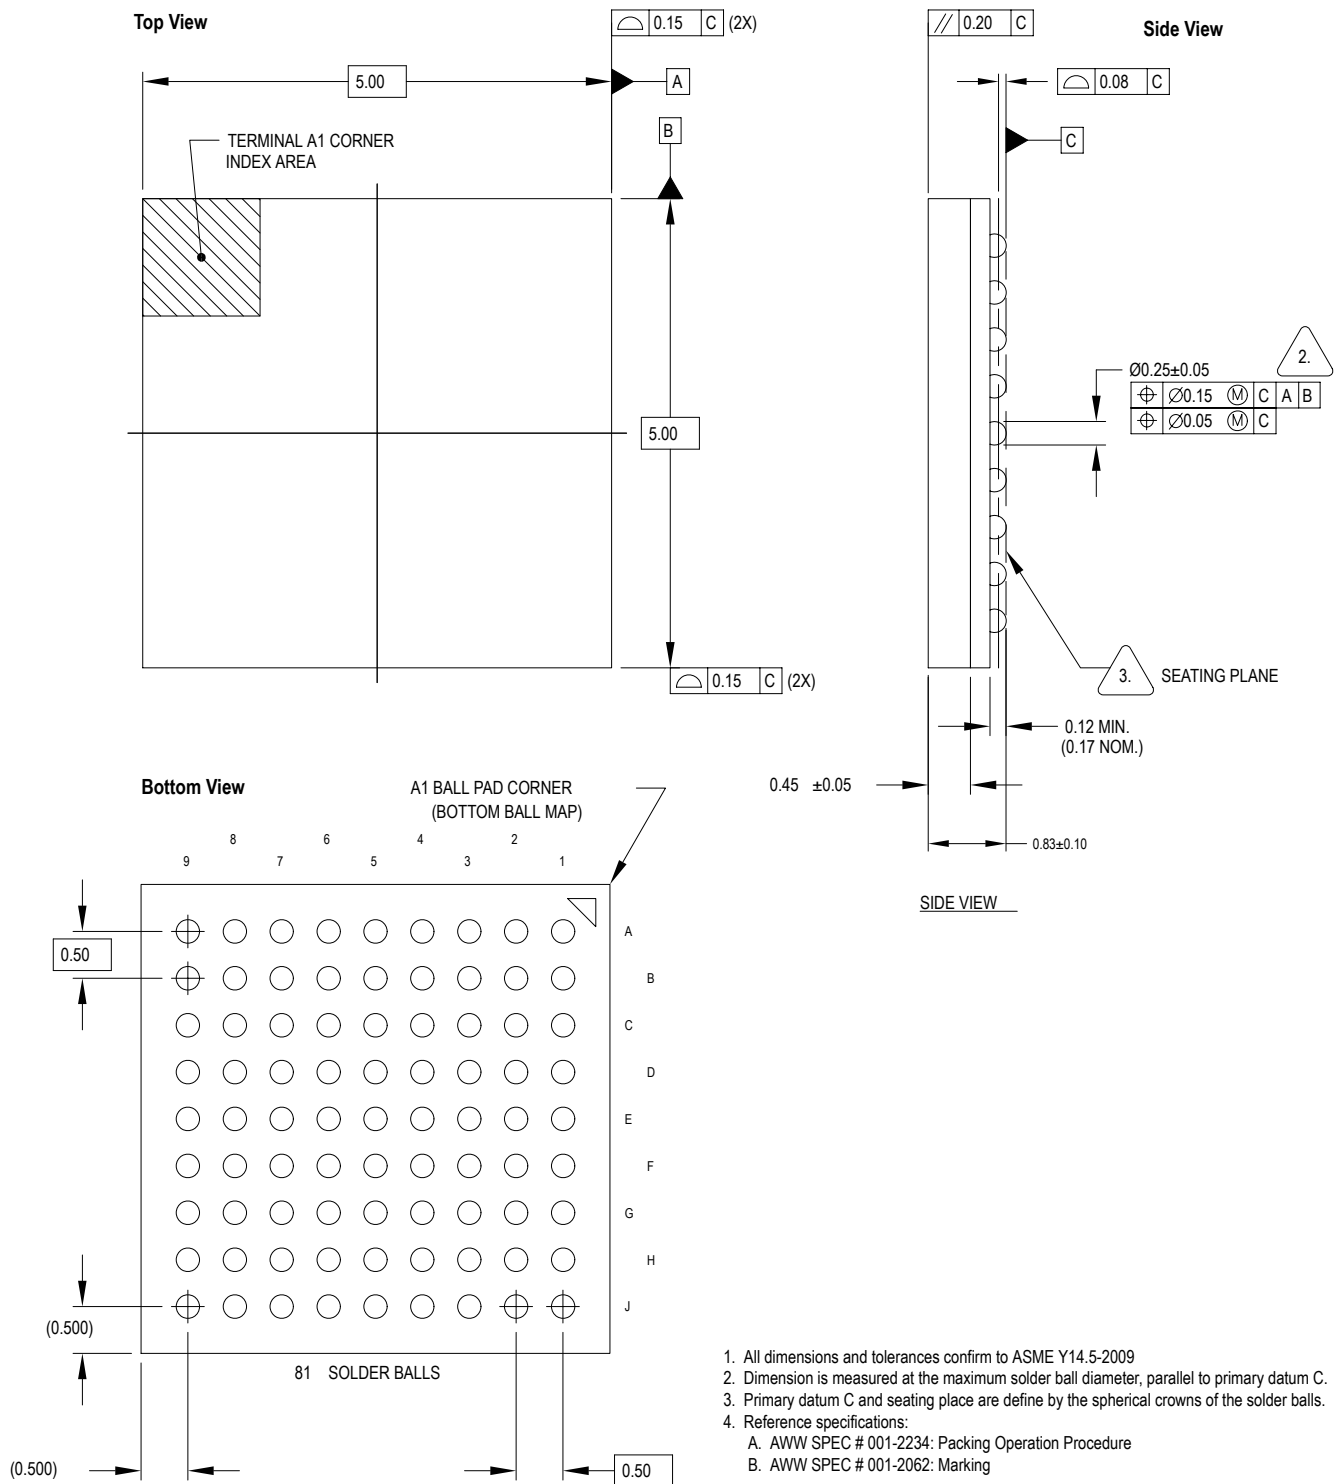

## 100-Lead LQFP Package Specifications

The following figures show the pin, I/O bank locations, package top-side marking, and outlines for this package.

### Figure 13: 100-Lead LQFP Pinout Diagram

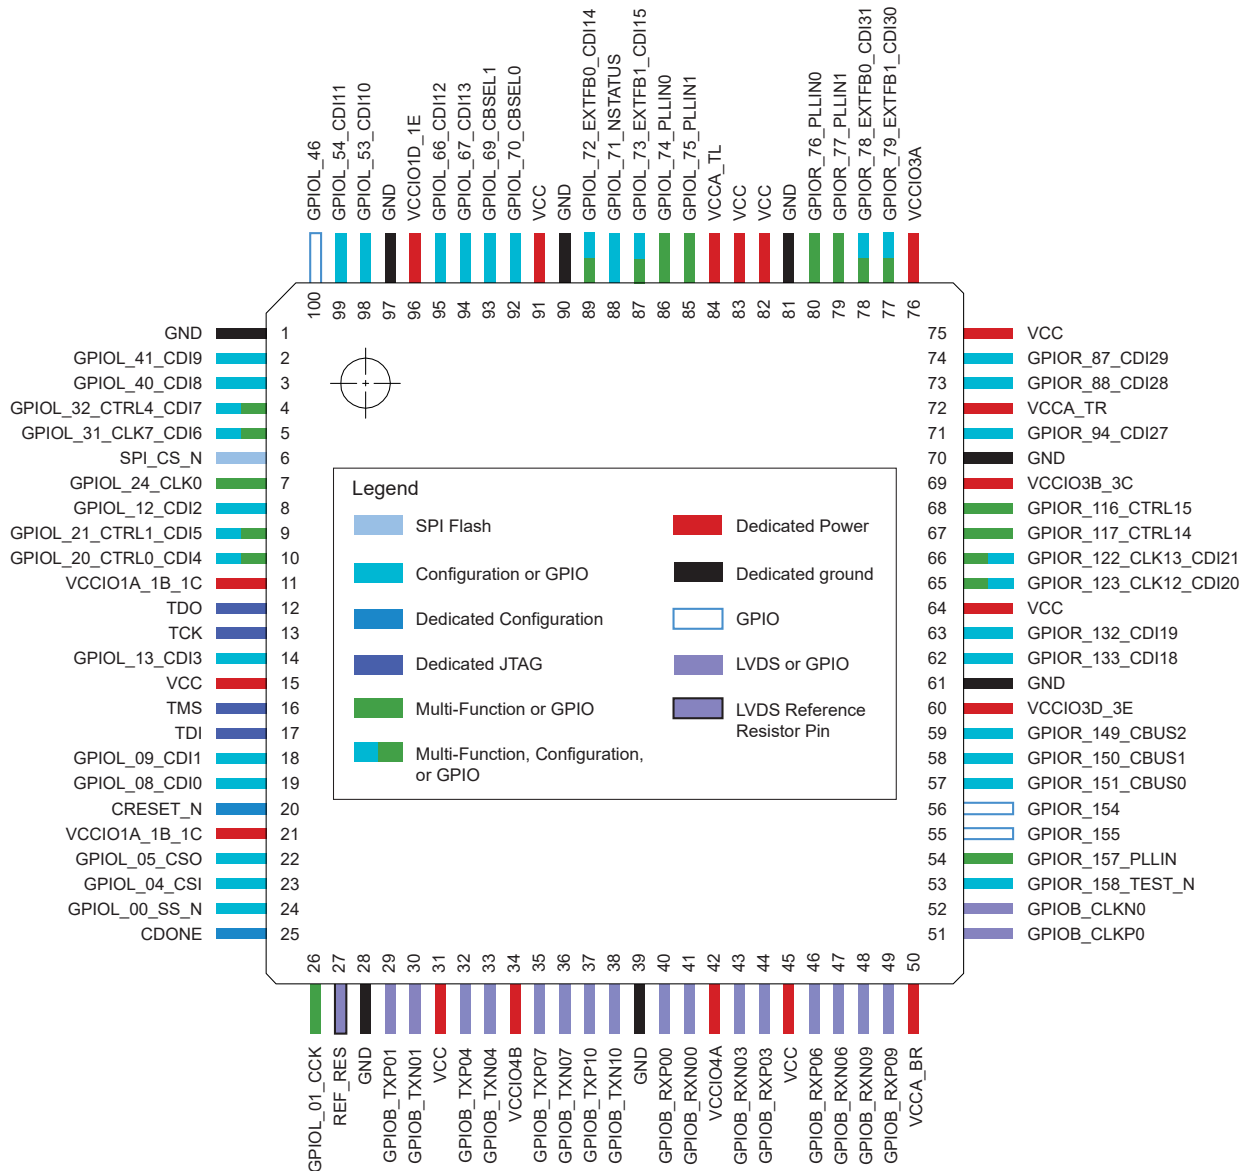


Figure 14: 100-Lead LQFP I/O Bank Diagram

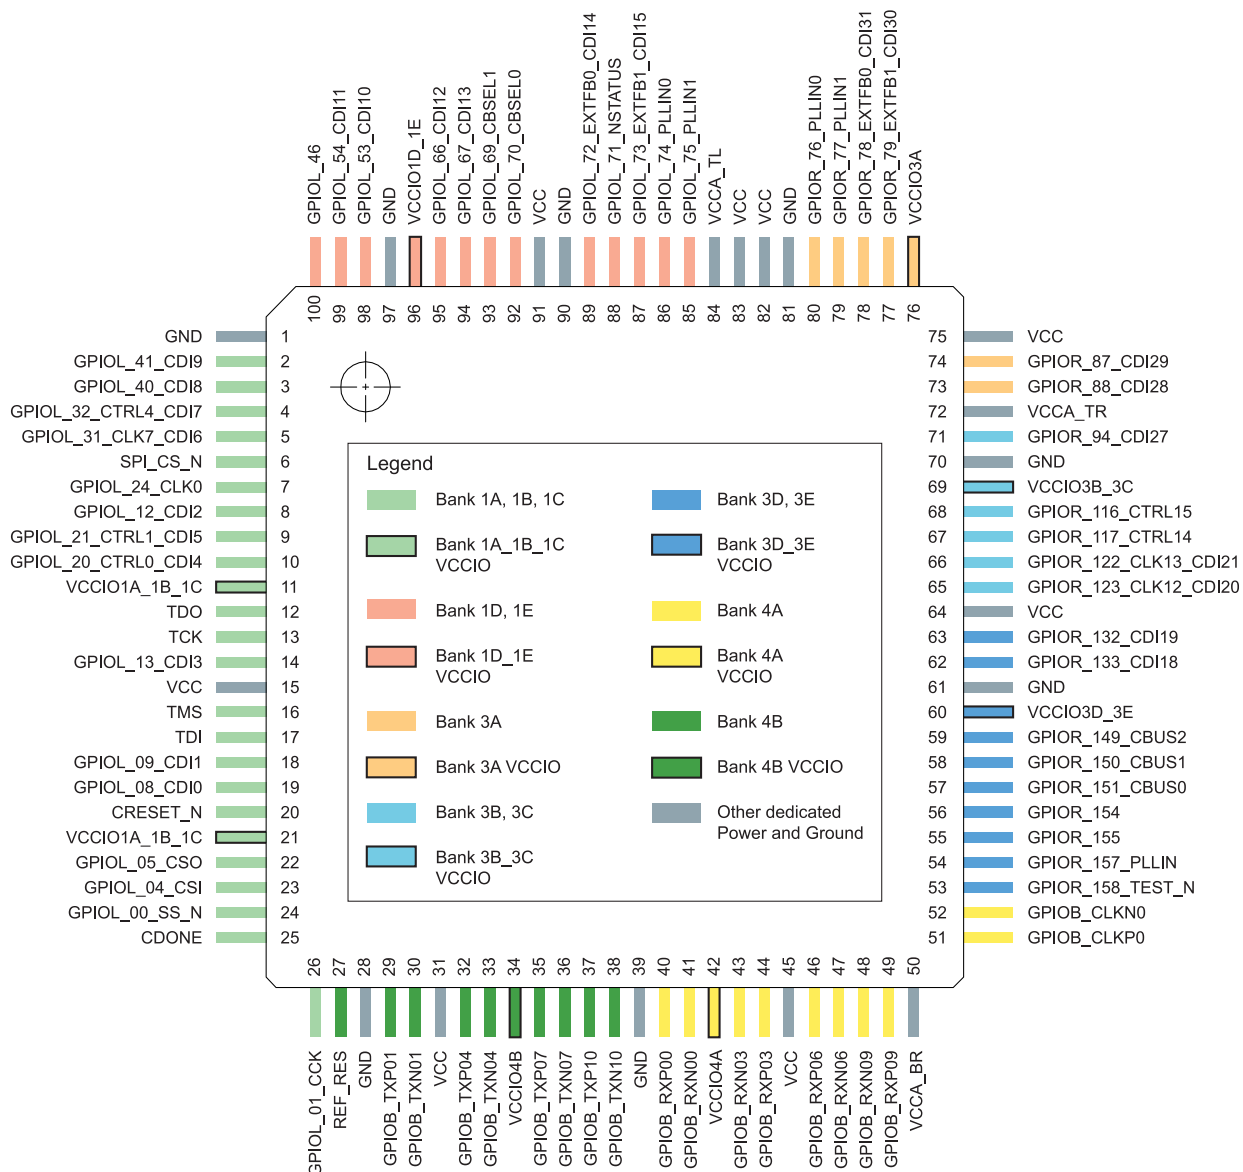


Figure 15: 100-Lead LQFP FPGA Package Marking




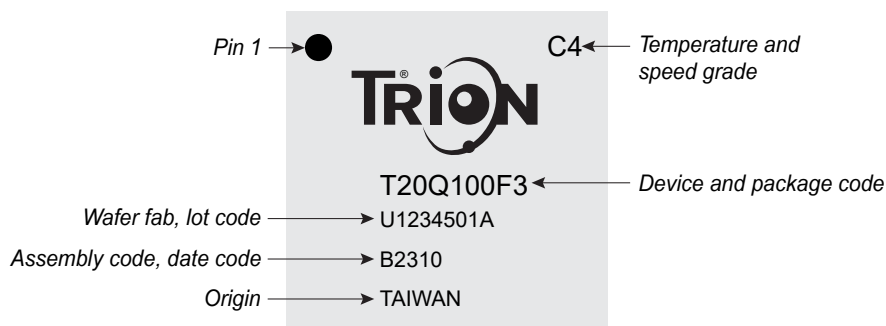


Figure 16: 100-Lead LQFP FPGA Package Outline

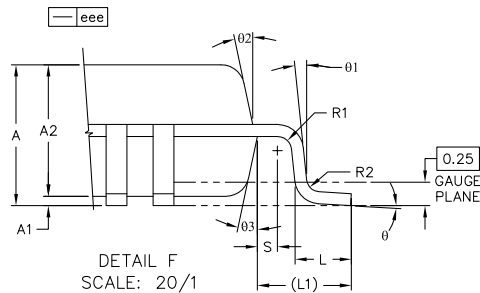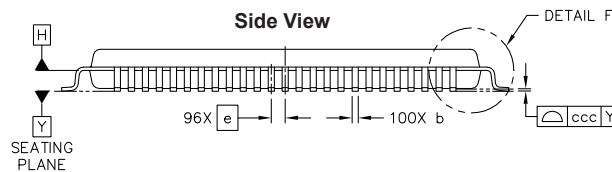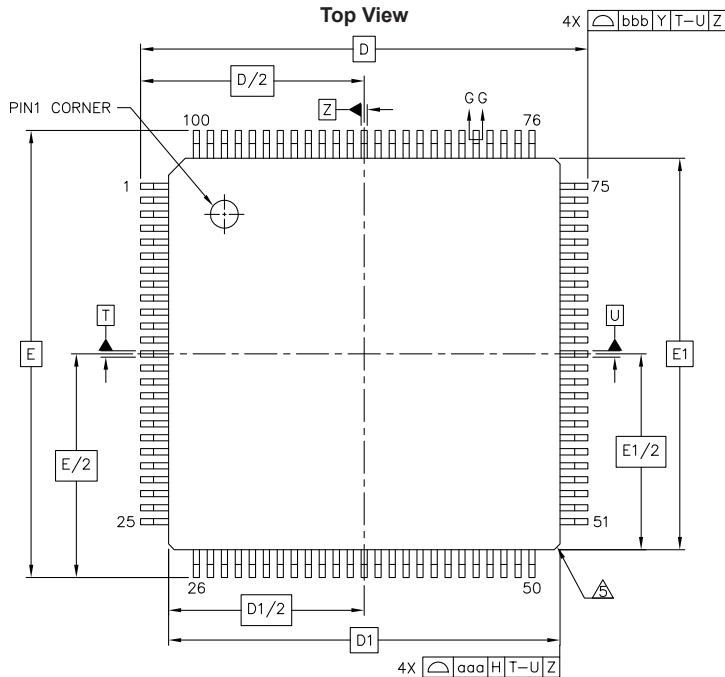


|                         | SYMBOL | MIN     | NOM  | MAX  |
|-------------------------|--------|---------|------|------|
| TOTAL THICKNESS         | A      | ---     | ---  | 1.6  |
| STAND OFF               | A1     | 0.05    | ---  | 0.15 |
| MOLD THICKNESS          | A2     | 1.35    | 1.4  | 1.45 |
| LEAD WIDTH (PLATING)    | b      | 0.17    | 0.2  | 0.27 |
| LEAD WIDTH              | b1     | 0.17    | ---  | 0.23 |
| L/F THICKNESS (PLATING) | c      | 0.09    | ---  | 0.2  |
| L/F THICKNESS           | c1     | 0.09    | ---  | 0.16 |
| BODY SIZE               | X D    | 16 BSC  |      |      |
|                         | Y E    | 16 BSC  |      |      |
|                         | X D1   | 14 BSC  |      |      |
|                         | Y E1   | 14 BSC  |      |      |
| LEAD PITCH              | e      | 0.5 BSC |      |      |
| FOOTPRINT               | L      | 0.45    | 0.6  | 0.75 |
|                         | L1     | 1 REF   |      |      |
|                         | theta  | 0°      | 3.5° | 7°   |
|                         | theta1 | 0°      | ---  | ---  |
|                         | theta2 | 11°     | 12°  | 13°  |
|                         | theta3 | 11°     | 12°  | 13°  |
|                         | R1     | 0.08    | ---  | ---  |
|                         | R2     | 0.08    | ---  | 0.2  |
|                         | S      | 0.2     | ---  | ---  |
| PACKAGE EDGE TOLERANCE  | aaa    | 0.2     |      |      |
| LEAD EDGE TOLERANCE     | bbb    | 0.2     |      |      |
| COPLANARITY             | ccc    | 0.08    |      |      |
| LEAD OFFSET             | ddd    | 0.08    |      |      |
| MOLD FLATNESS           | eee    | 0.05    |      |      |

## NOTES

- DATUM T, U, AND Z TO BE DETERMINED AT DATUM PLANE H.
- DIMENSIONS D AND E TO BE DETERMINED AT SEATING PLANE DATUM Y.
- DIMENSIONS D1 AND E1 DO NOT INCLUDE MOLD PROTRUSION. ALLOWABLE PROTRUSION IS 0.25 PER SIDE. DIMENSIONS D1 AND E1 DO INCLUDE MOLD MISMATCH AND ARE DETERMINED AT DATUM PLANE DATUM H.
- DIMENSION b DOES NOT INCLUDE DAM BAR PROTRUSION. ALLOWABLE DAM BAR PROTRUSION SHALL NOT CAUSE THE LEAD WIDTH TO EXCEED THE MAXIMUM b DIMENSION BY MORE THAN 0.08 mm. DAM BAR CANNOT BE LOCATED ON THE LOWER RADIUS OR THE FOOT. MINIMUM SPACE BETWEEN PROTRUSION AND AN ADJACENT LEAD IS 0.07 mm.

$\triangle$  EXACT SHAPE OF EACH CORNER IS OPTIONAL.



# 144-Lead LQFP Package Specifications

The following figures show the pin, I/O bank locations, package top-side marking, and outlines for this package.

Figure 17: 144-Lead LQFP Pinout Diagram

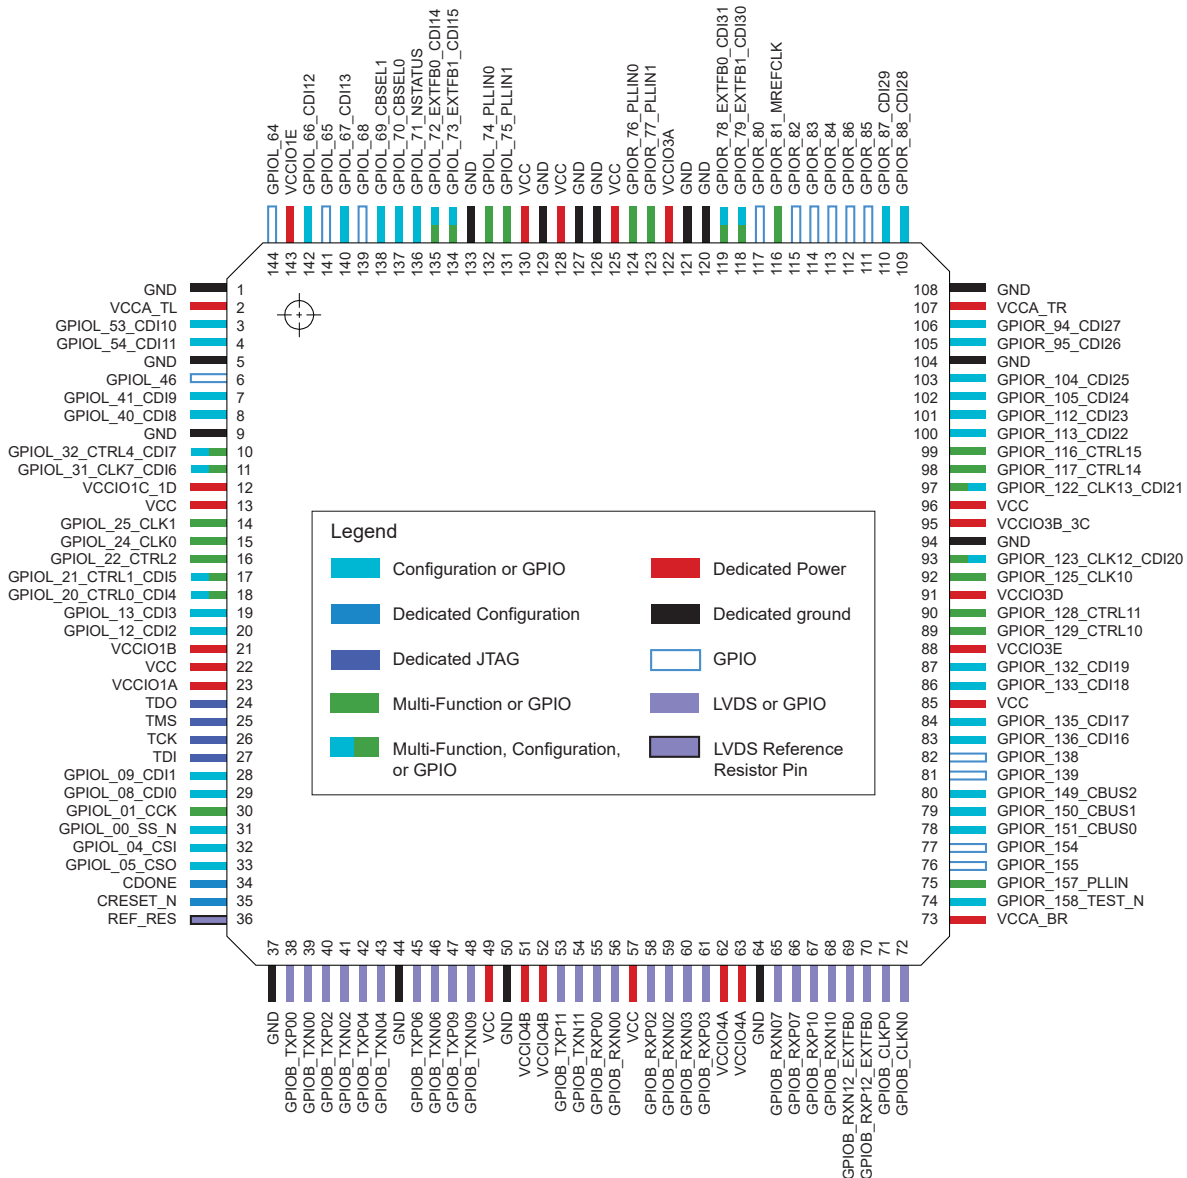


Figure 18: 144-Lead LQFP I/O Bank Diagram

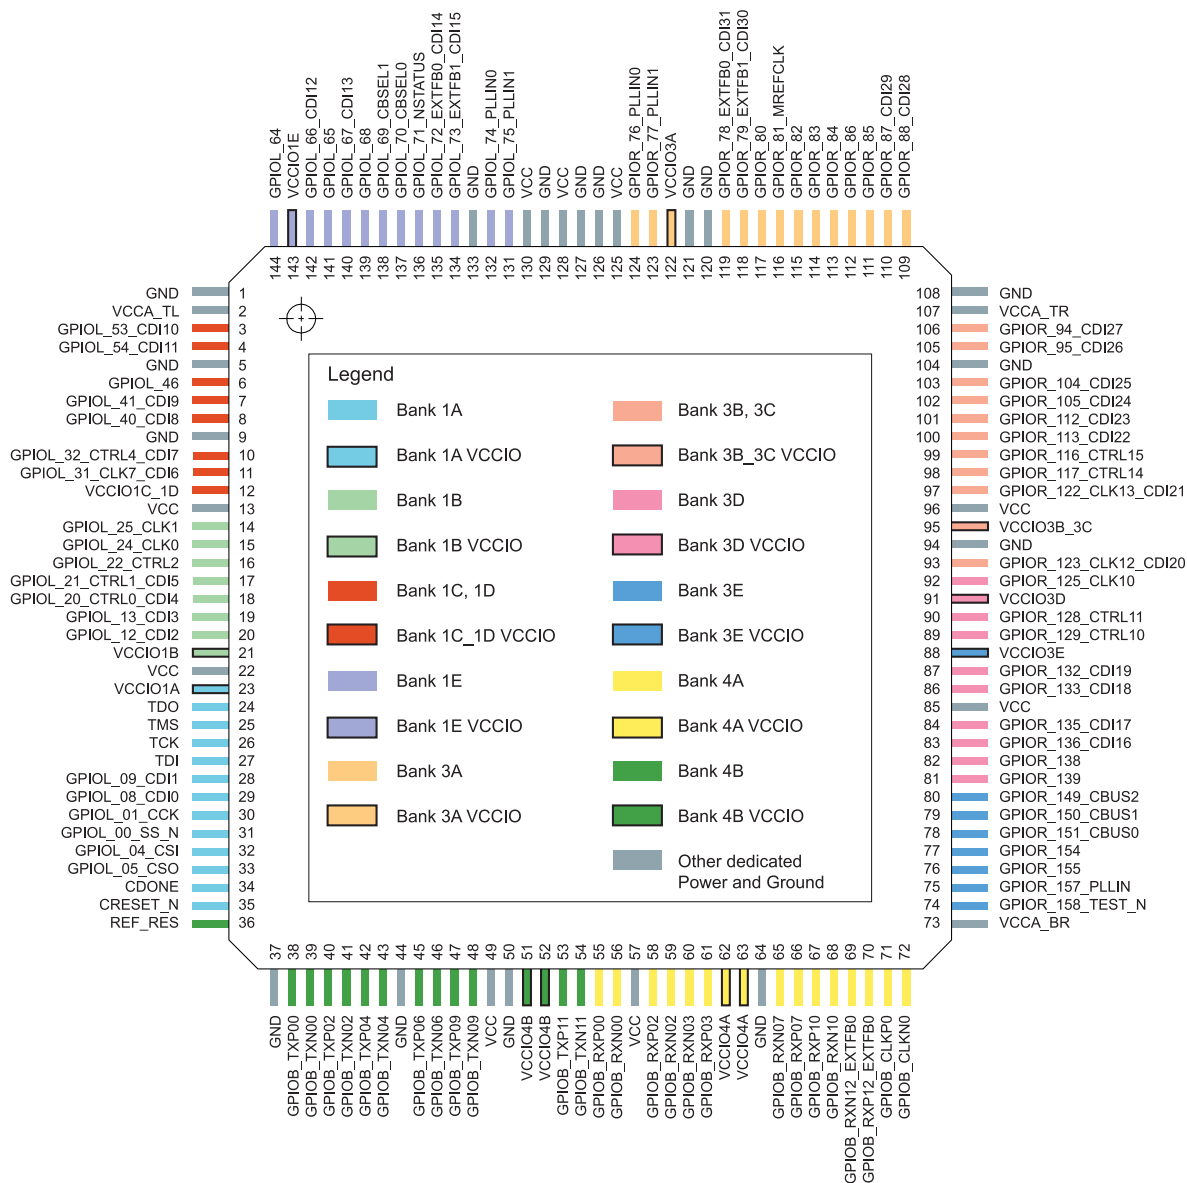


Figure 19: 144-Lead LQFP FPGA Package Marking


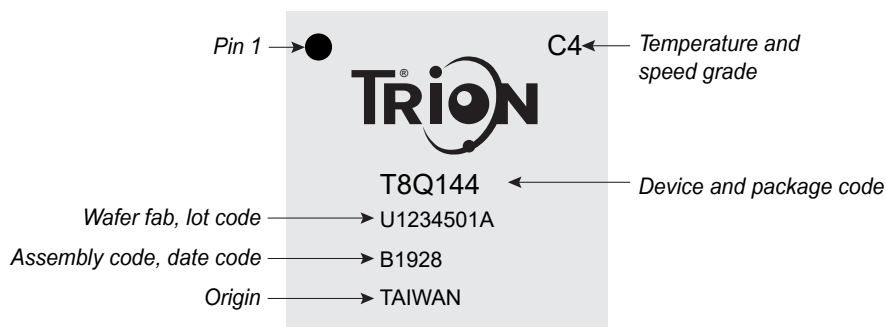


Figure 20: 144-Lead LQFP FPGA Package Outline


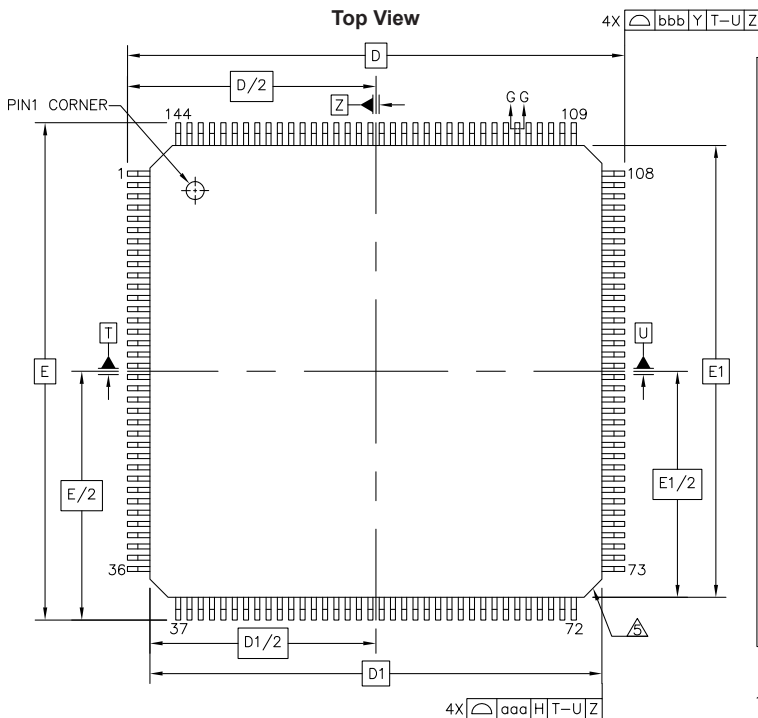


|                        | SYMBOL | MIN  | NOM     | MAX  |
|------------------------|--------|------|---------|------|
| TOTAL THICKNESS        | A      | ---  | ---     | 1.6  |
| STAND OFF              | A1     | 0.05 | ---     | 0.15 |
| MOLD THICKNESS         | A2     | 1.35 | 1.4     | 1.45 |
| LEAD WIDTH(PLATING)    | b      | 0.17 | 0.22    | 0.27 |
| LEAD WIDTH             | b1     | 0.17 | 0.2     | 0.23 |
| L/F THICKNESS(PLATING) | c      | 0.09 | ---     | 0.2  |
| L/F THICKNESS          | c1     | 0.09 | ---     | 0.16 |
| BODY SIZE              | X      | D    | 22 BSC  |      |
|                        | Y      | E    | 22 BSC  |      |
|                        | X      | D1   | 20 BSC  |      |
|                        | Y      | E1   | 20 BSC  |      |
| LEAD PITCH             | e      |      | 0.5 BSC |      |
|                        | L      | 0.45 | 0.6     | 0.75 |
| FOOTPRINT              | L1     |      | 1 REF   |      |
|                        | θ      | 0°   | 3.5°    | 7°   |
|                        | θ1     | 0°   | ---     | ---  |
|                        | θ2     | 11°  | 12°     | 13°  |
|                        | θ3     | 11°  | 12°     | 13°  |
|                        | R1     | 0.08 | ---     | ---  |
|                        | R2     | 0.08 | ---     | 0.2  |
|                        | S      | 0.2  | ---     | ---  |
| PACKAGE EDGE TOLERANCE | aaa    |      | 0.1     |      |
| LEAD EDGE TOLERANCE    | bbb    |      | 0.2     |      |
| COPLANARITY            | ccc    |      | 0.08    |      |
| LEAD OFFSET            | ddd    |      | 0.08    |      |
| MOLD FLATNESS          | eee    |      | 0.05    |      |

## NOTES

1. DATUM T, U, AND Z TO BE DETERMINED AT DATUM PLANE H.
2. DIMENSIONS D AND E TO BE DETERMINED AT SEATING PLANE DATUM Y.
3. DIMENSIONS D1 AND E1 DO NOT INCLUDE MOLDDPROTRUSION. ALLOWABLE PROTRUSION IS 0.25 PER SIDE. DIMENSIONS D1 AND E1 DO INCLUDE MOLD MISMATCH AND ARE DETERMINED AT DATUM PLANE DATUM H.
4. DIMENSION b DOES NOT INCLUDE DAM BAR PROTRUSION. ALLOWABLE DAM BAR PROTRUSION SHALL NOT CAUSE THE LEAD WIDTH TO EXCEED THE MAXIMUMb DIMENSION BY MORE THAN 0.08 mm. DAM BAR CANNOT BE LOCATED ON THE LOWER RADIUS OR THE FOOT. MINIMUM SPACE BETWEEN PROTRUSION AND AN ADJACENT LEAD IS 0.07 mm.

△ EXACT SHAPE OF EACH CORNER IS OPTIONAL.

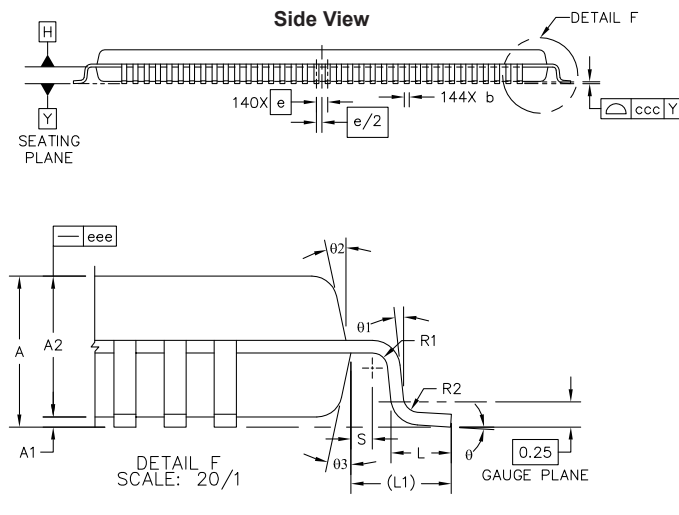

# 169-Ball FBGA Package Specifications

The following figures show the pin, I/O bank locations, package top-side marking, and outlines for this package. FPGAs in this package are pin compatible.

Figure 21: 169-Ball FBGA Pinout Diagram

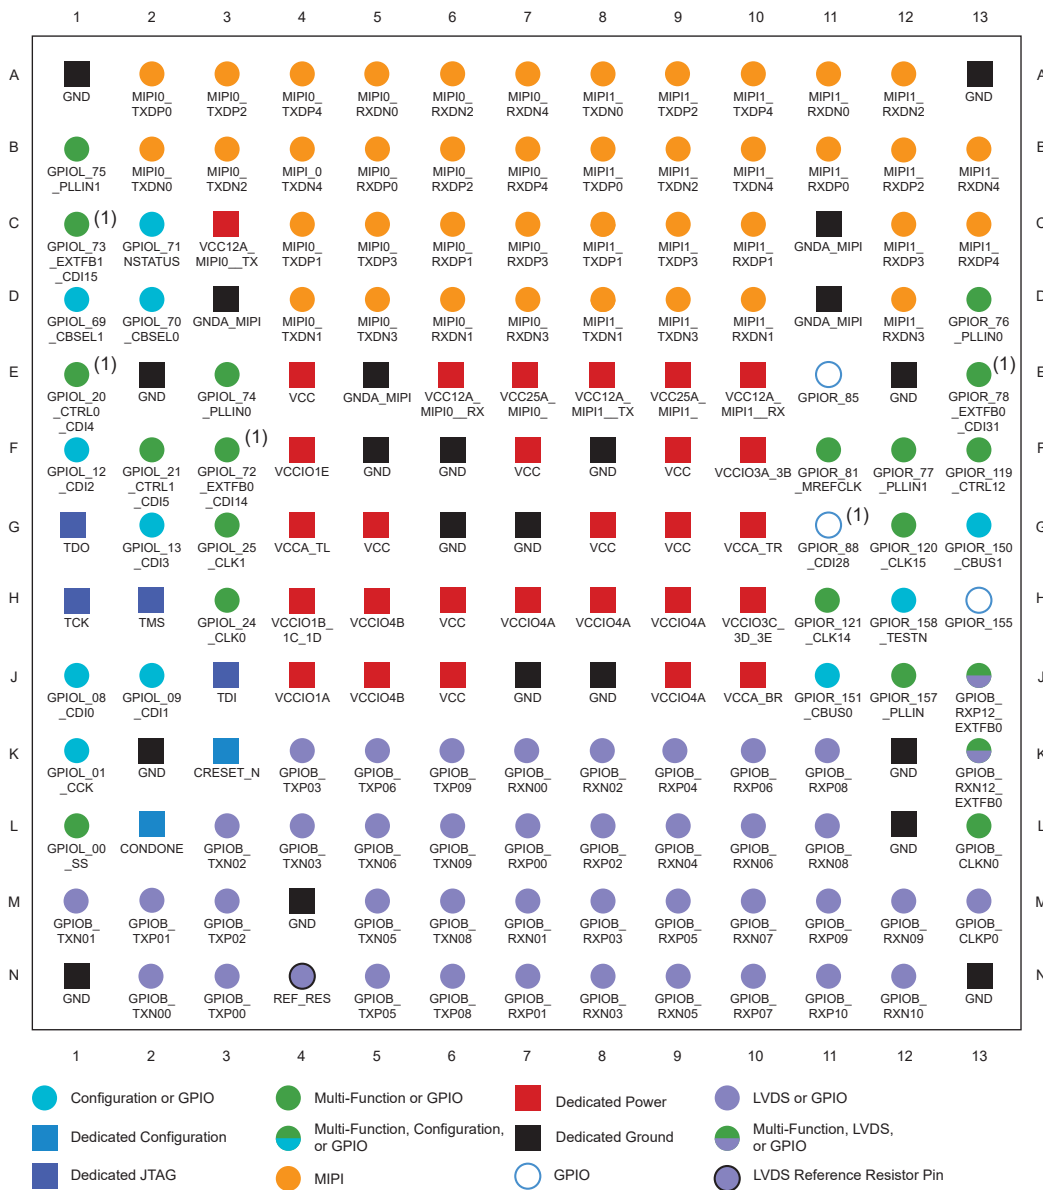


Figure 22: 169-Ball FBGA I/O Bank Diagram



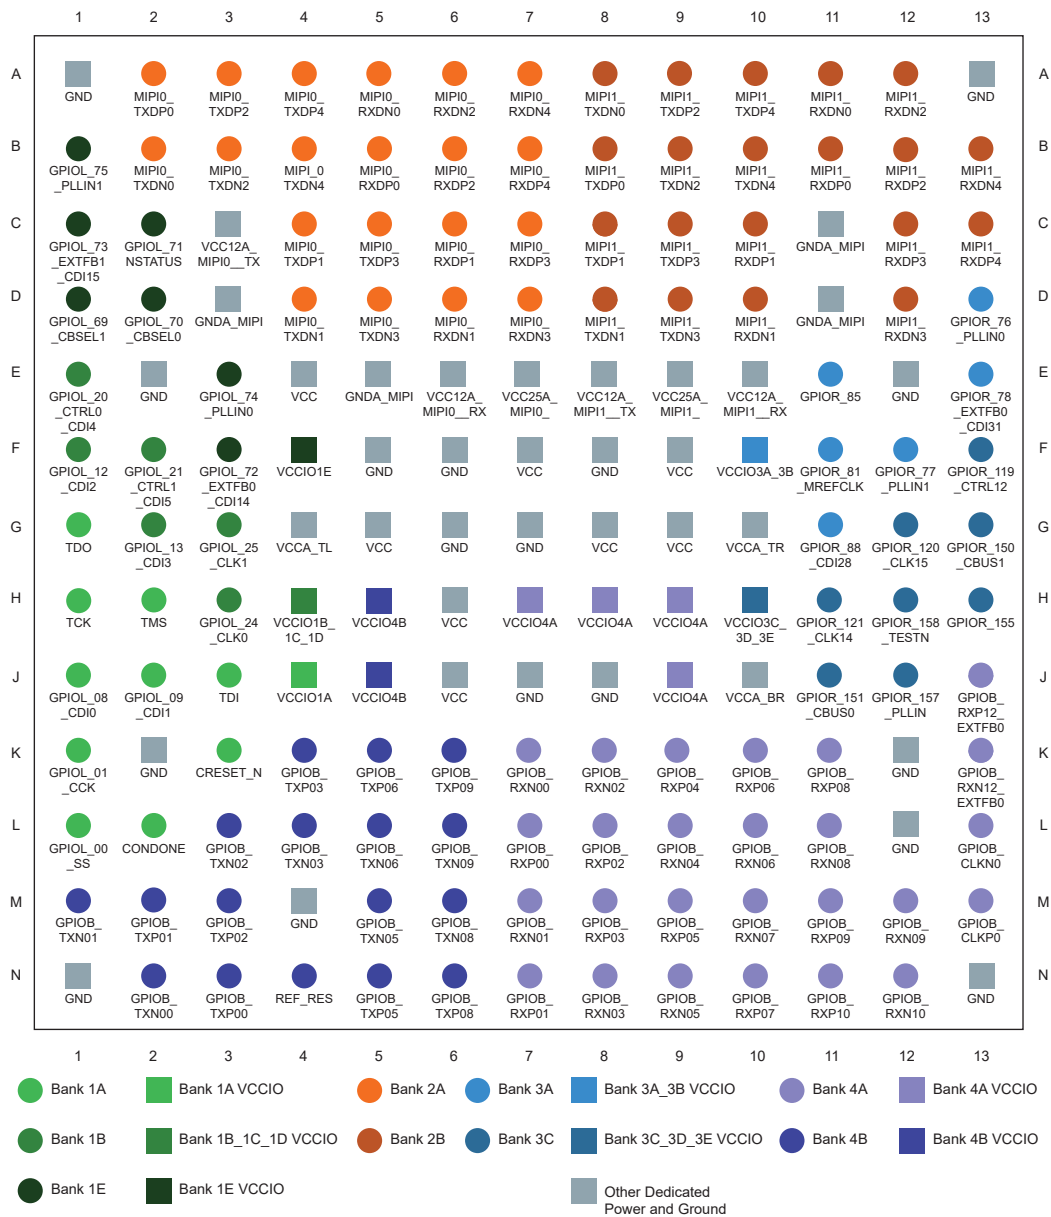


Figure 23: 169-Ball FPGA Package Marking

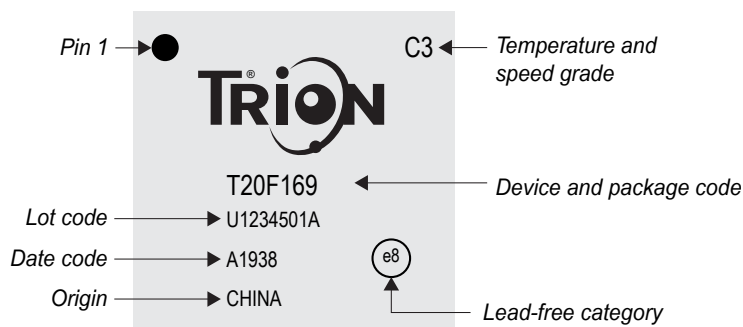

**Figure 24: 169-Ball FBGA Package Outline**

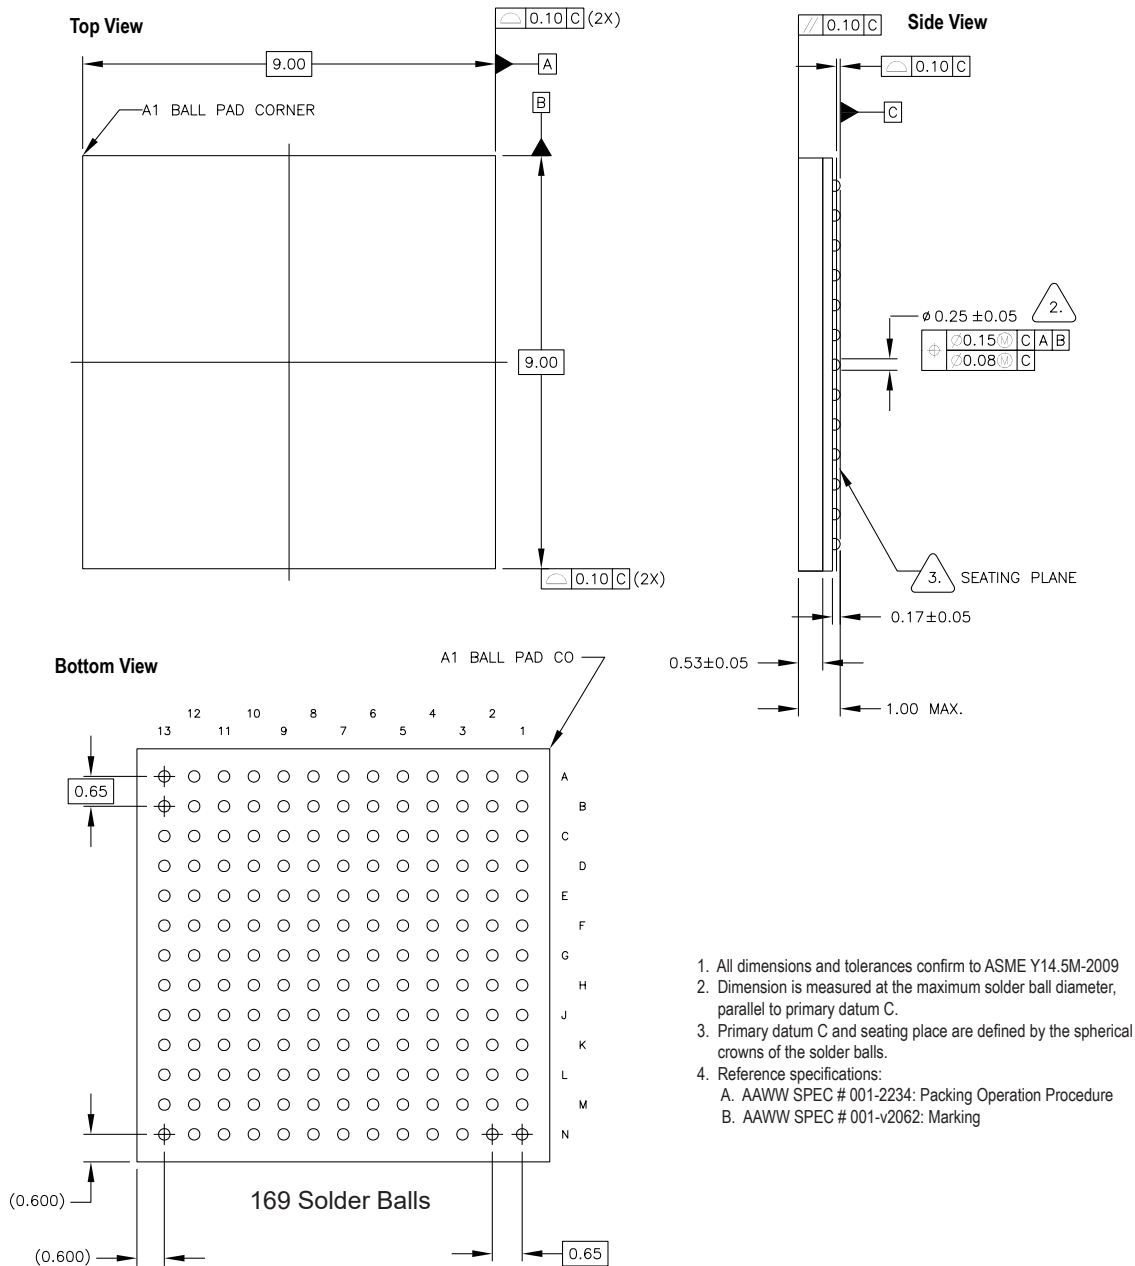


# 256-Ball FBGA Package Specifications



The following figures show the pin, I/O bank locations, package top-side marking, and outlines for this package. FPGAs in this package are pin compatible.

## T13 and T20 FPGAs


### Pinout and I/O Banks

Figure 25: 256-Ball FBGA Pinout Diagram (T13 and T20)

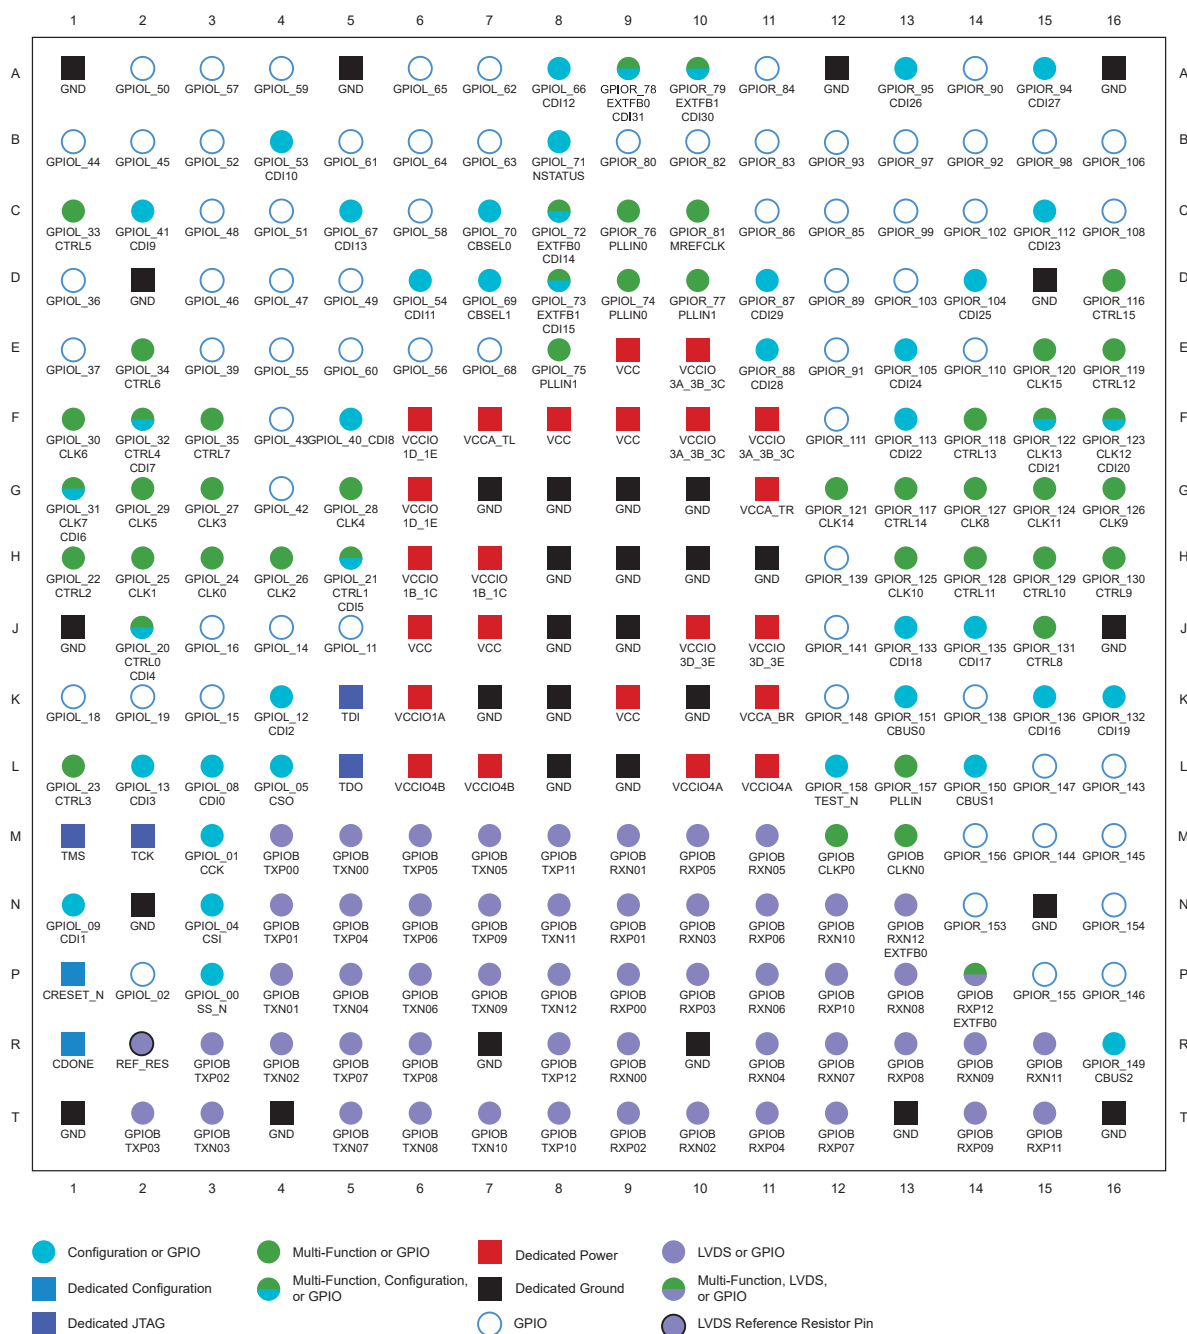

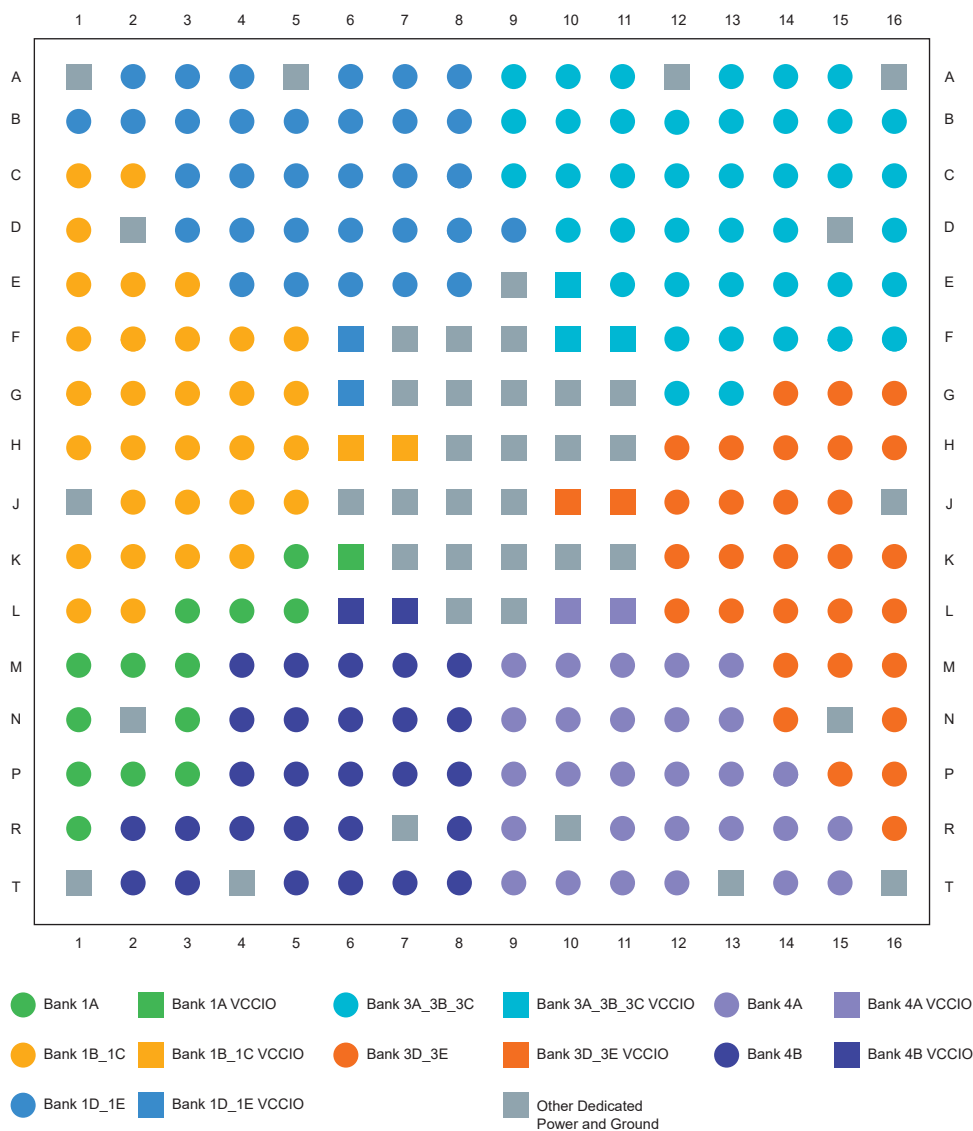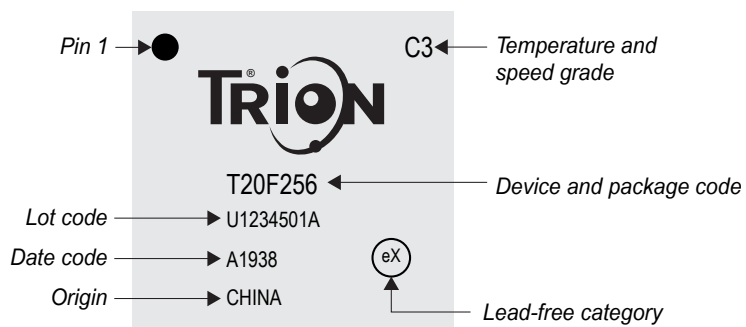**Figure 26: 256-Ball FBGA I/O Bank Diagram (T13 and T20)**

**Figure 27: 256-Ball FPGA Package Marking (T13 and T20)**

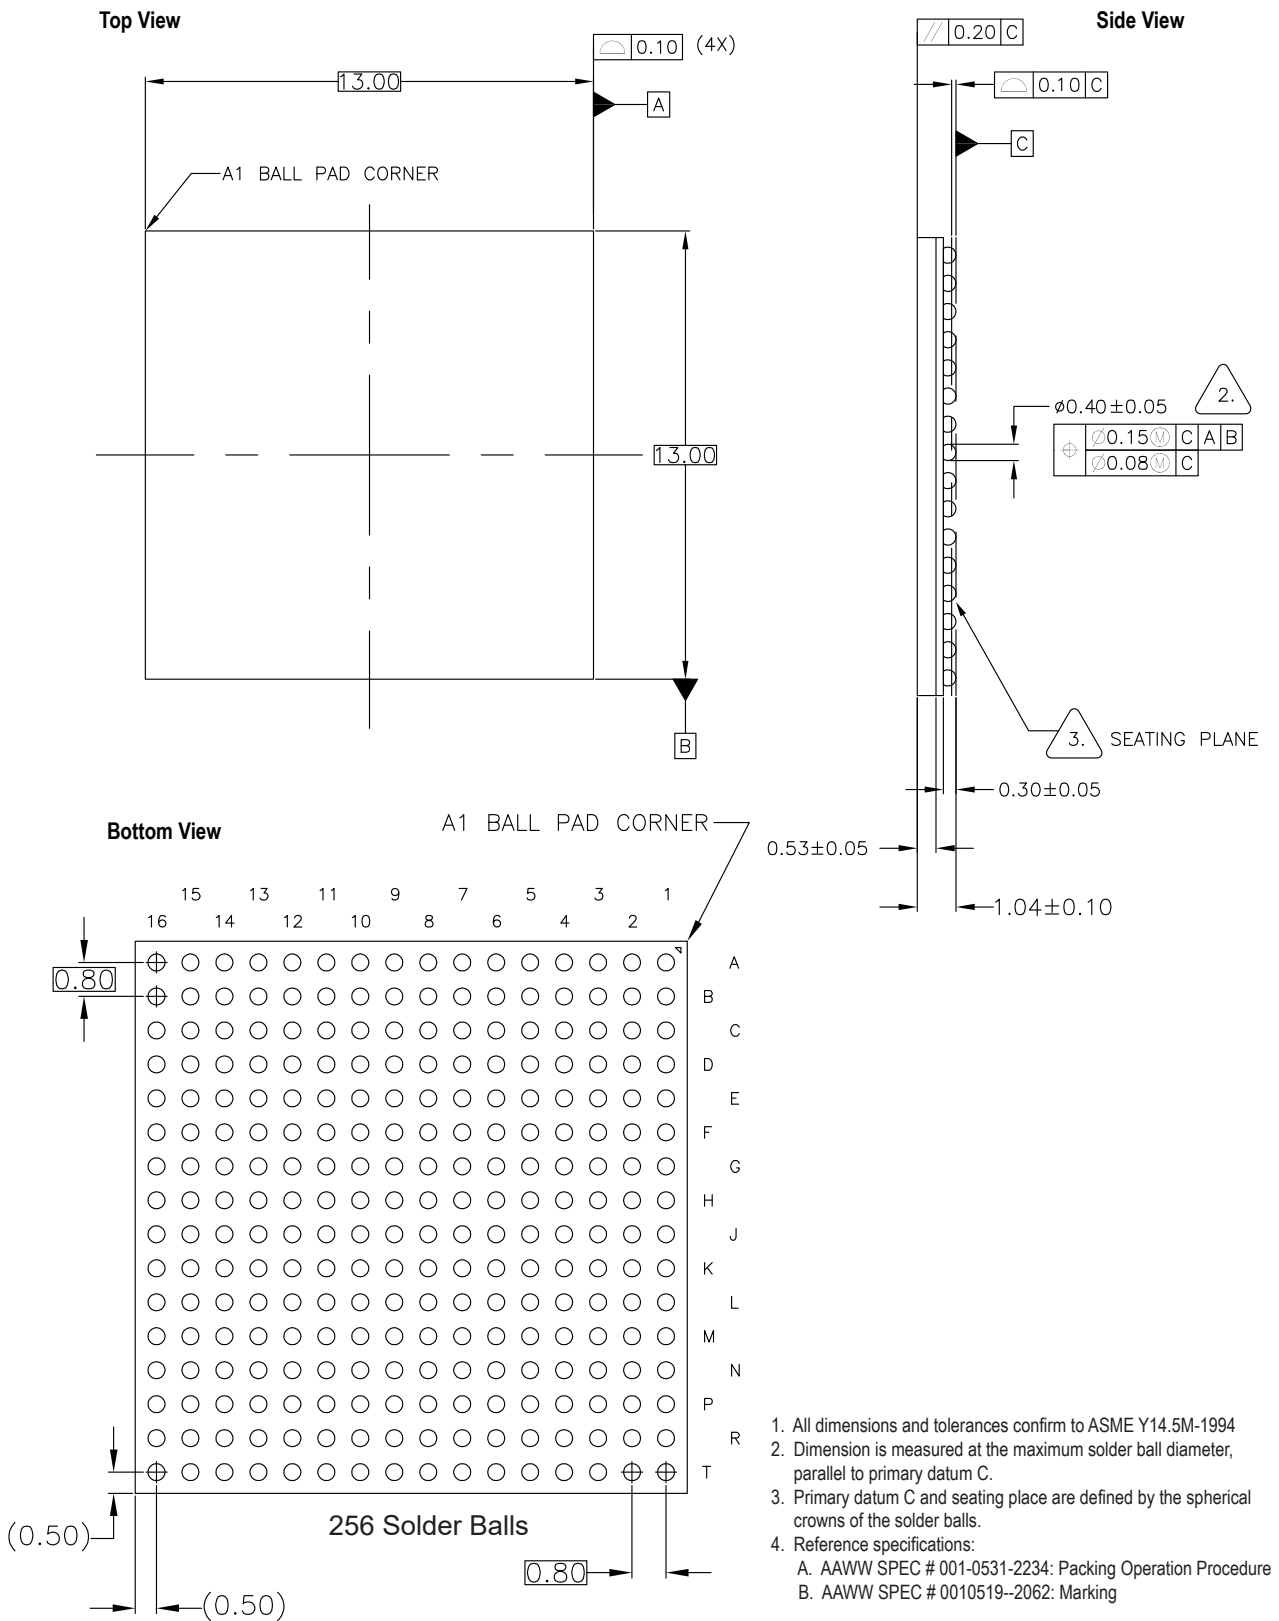
**Figure 28: 256-Ball FBGA Package Outline**



**T35 FPGAs**

## Pinout and I/O Banks

Figure 29: 256-Ball FBGA Pinout Diagram (T35)

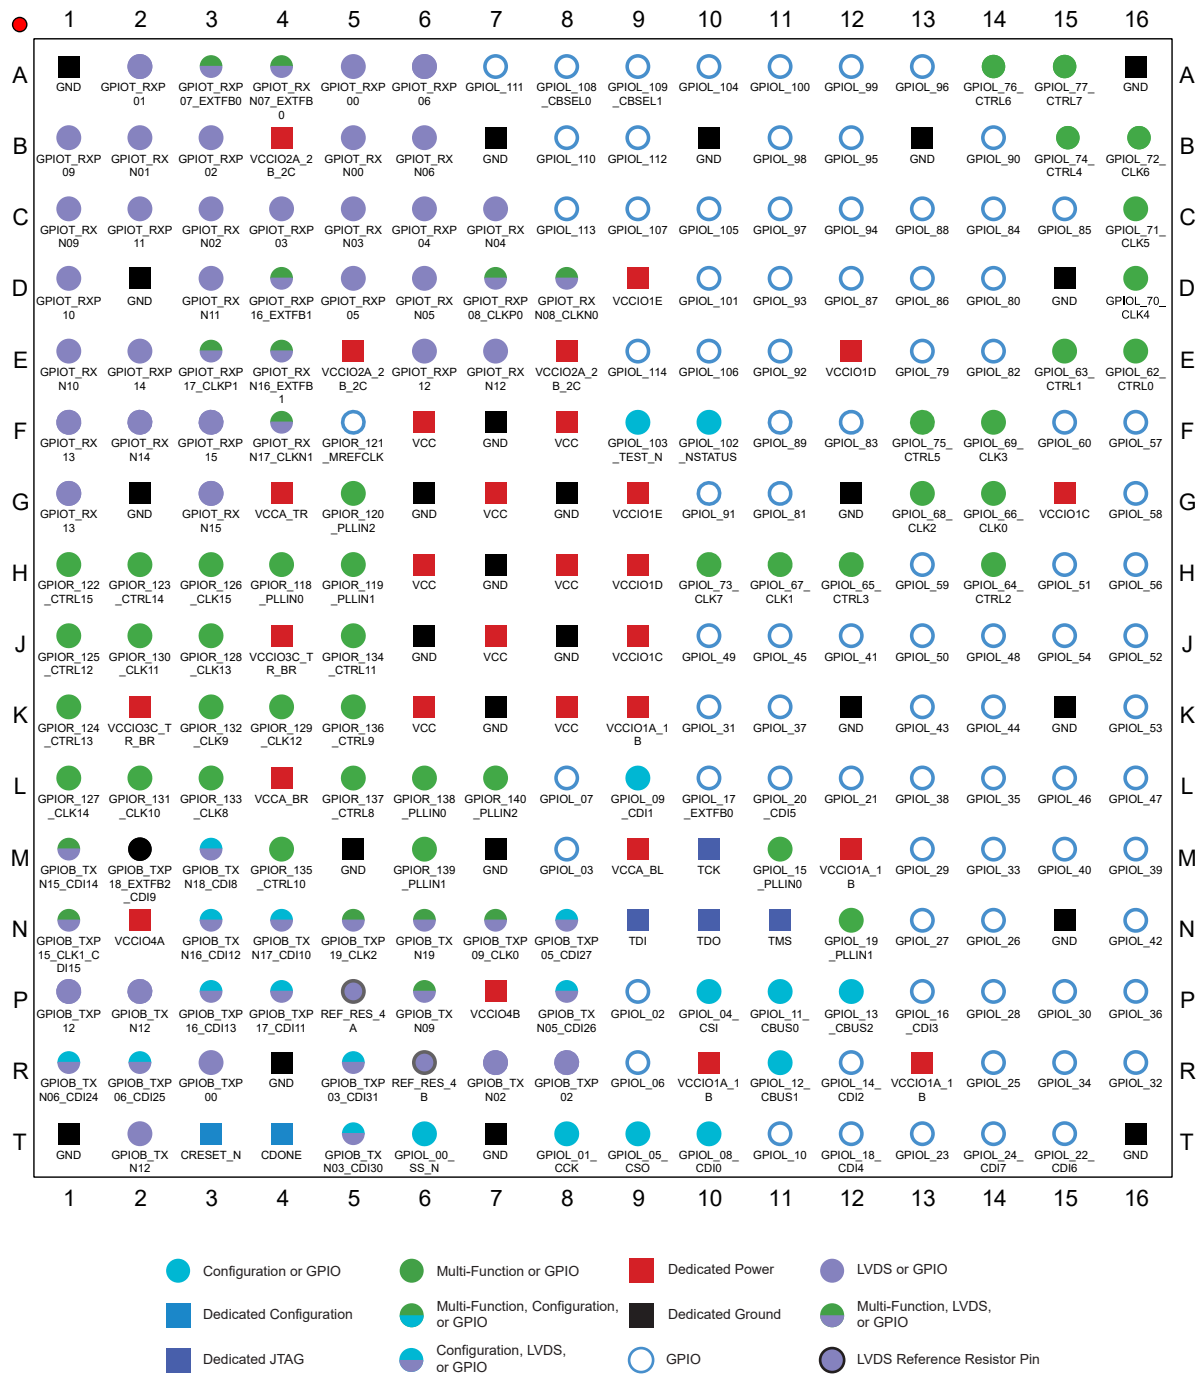


Figure 30: 256-Ball FBGA I/O Bank Diagram (T35)

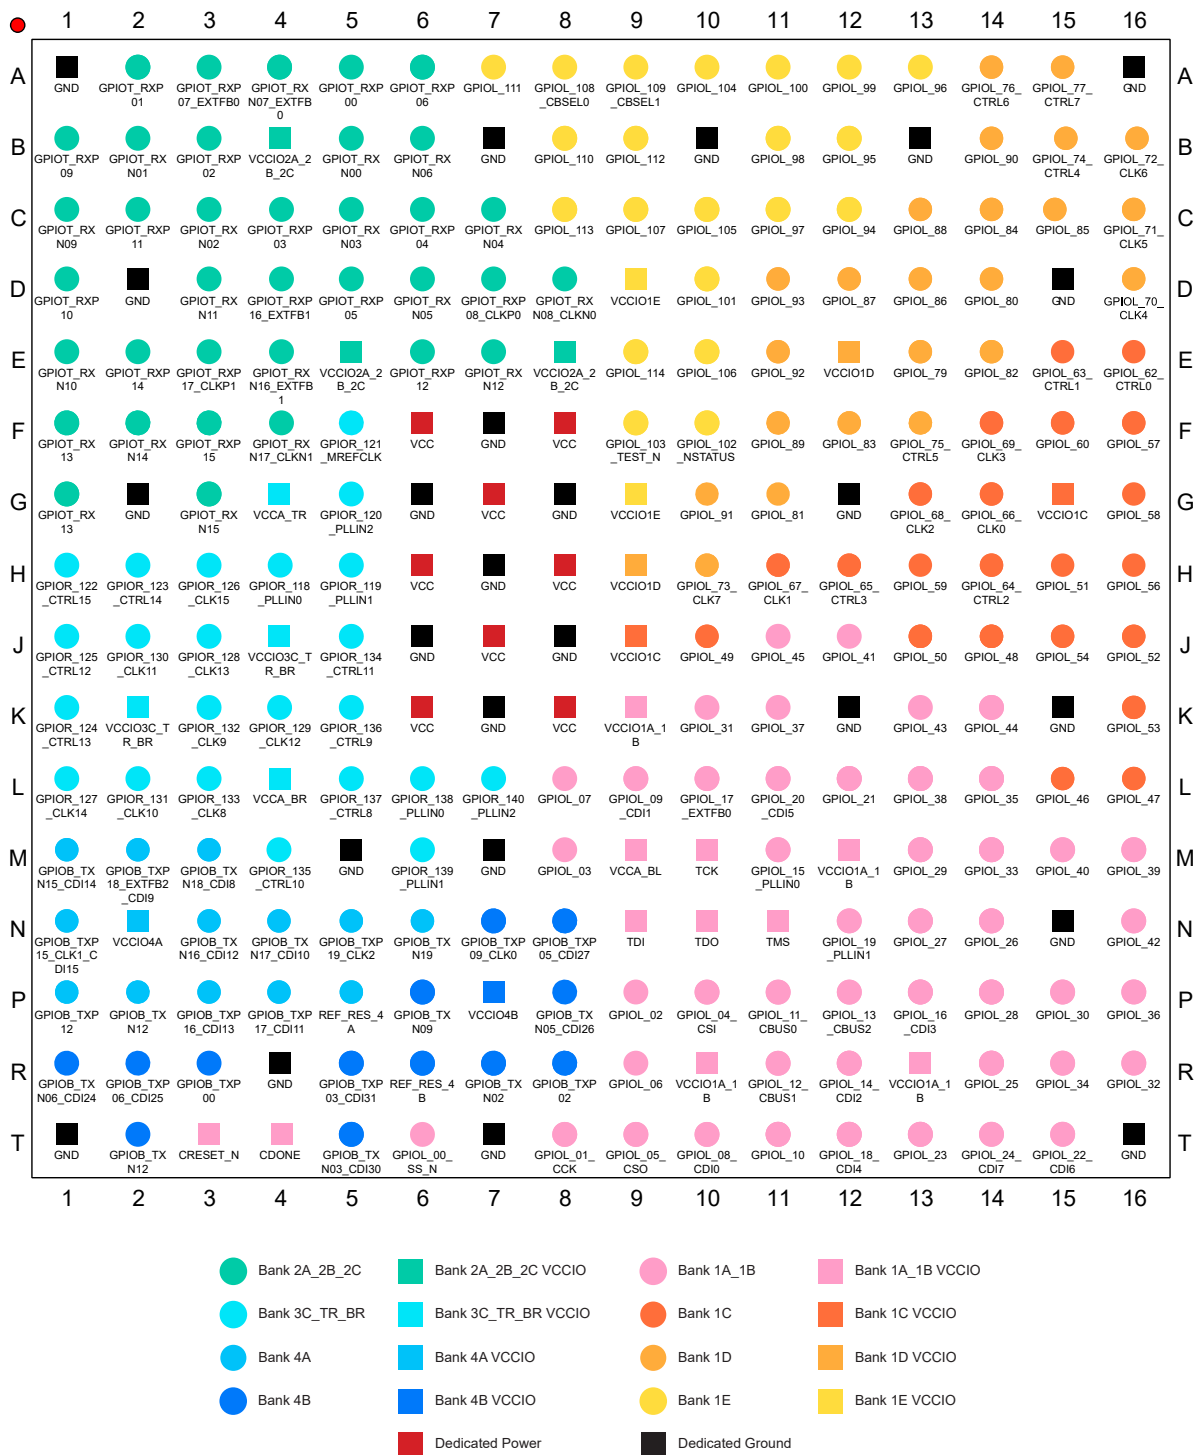


Figure 31: 256-Ball FPGA Package Marking (T35)


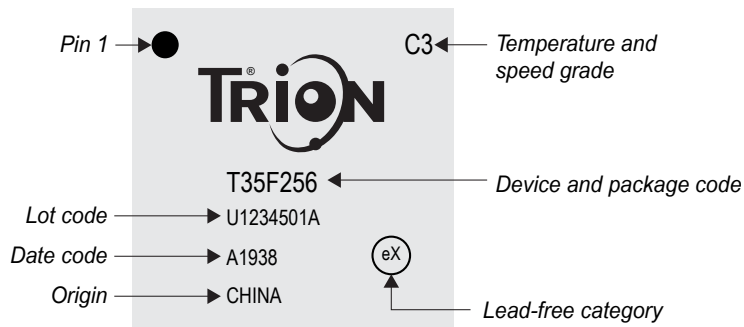


Figure 32: 256-Ball FBGA Package Outline



# 324-Ball FBGA Package Specifications

The following figures show the pin, I/O bank locations, package top-side marking, and outlines for this package. This is a flip chip package.

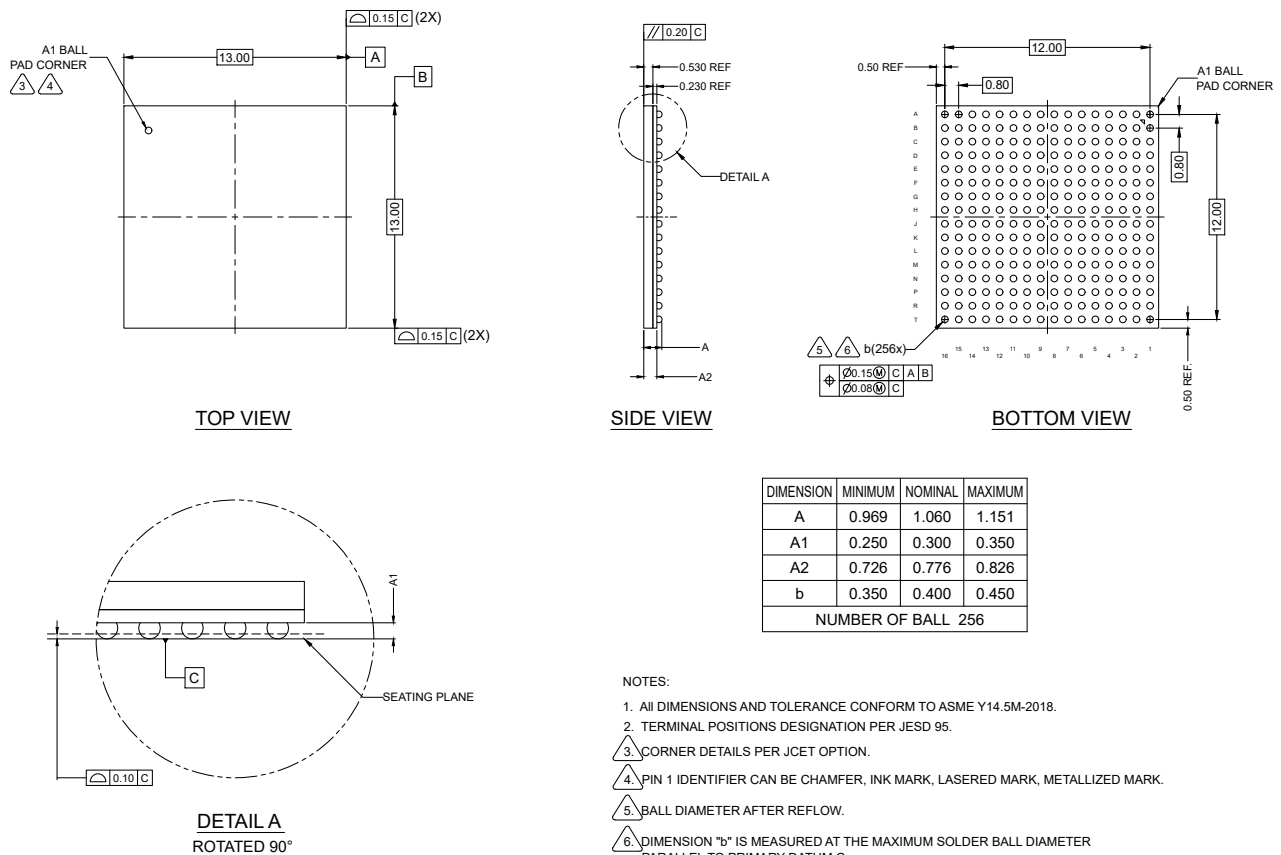

---

**Note:** Some pin names and I/O banks differ between T20/T35 and T55/T85/T120 FPGAs; however, you can still migrate between FPGAs in this package.

---

# T20 and T35 FPGAs

## Pinout and I/O Banks

Figure 33: 324-Ball FBGA Pinout Diagram (T20 and T35)


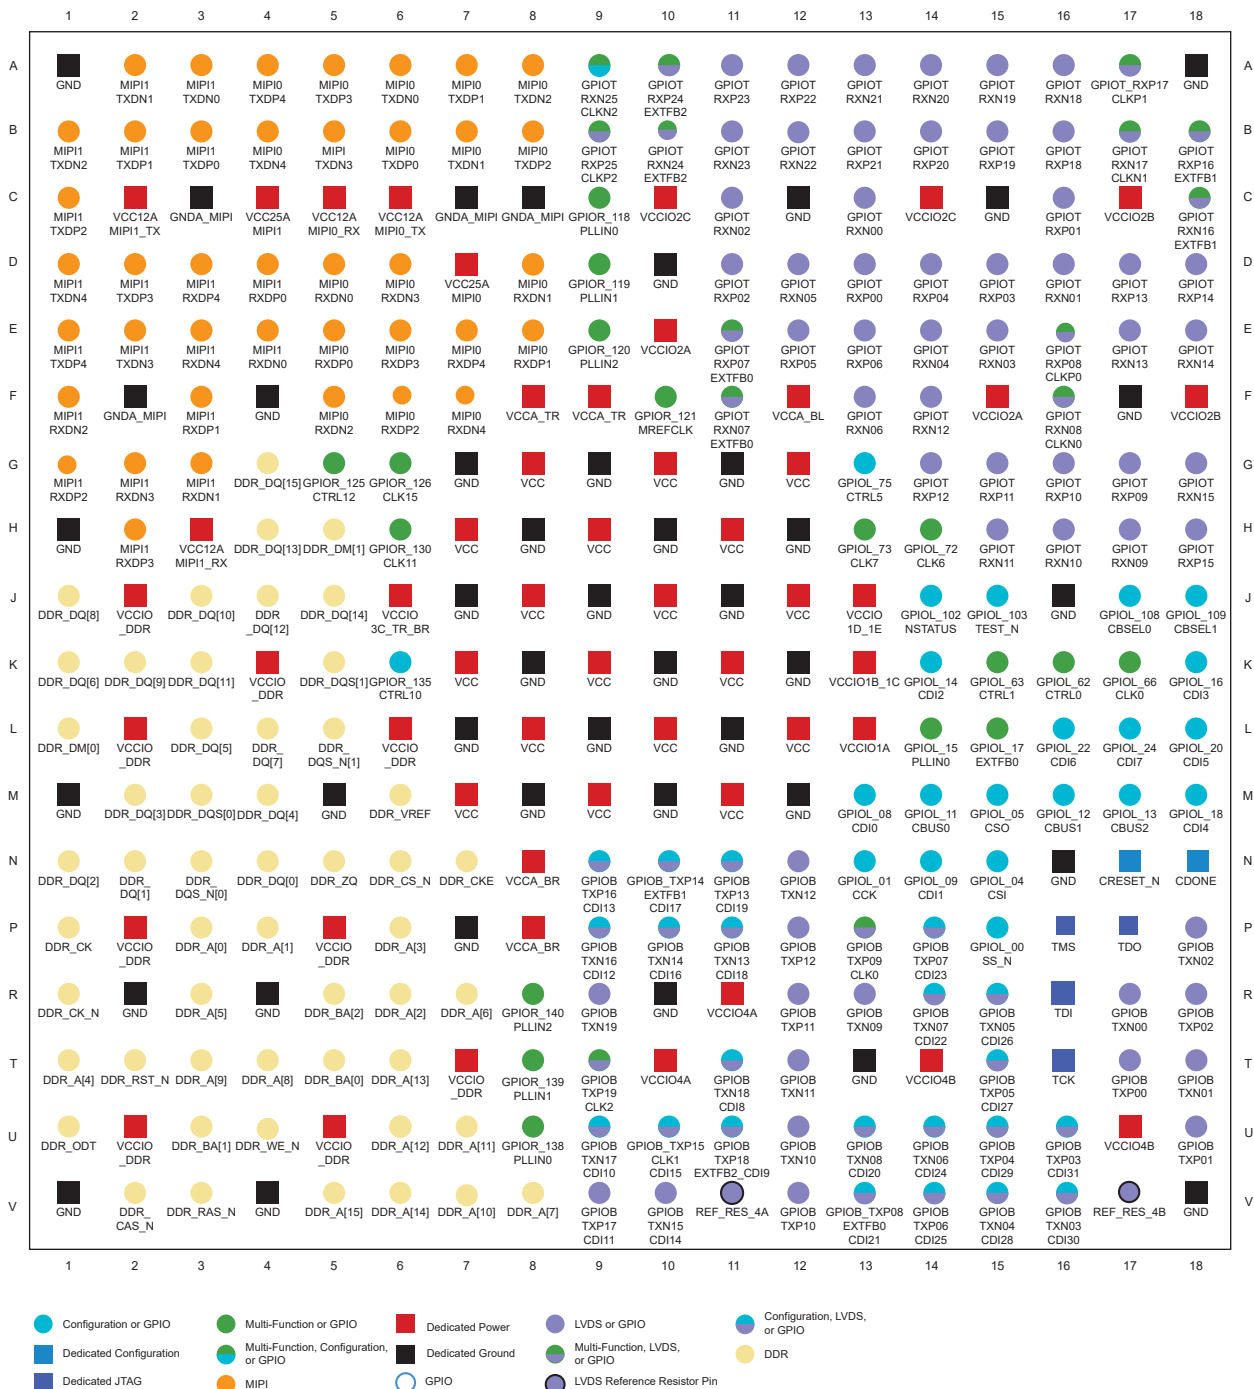


Figure 34: 324-Ball FBGA I/O Bank Diagram (T20 and T35)

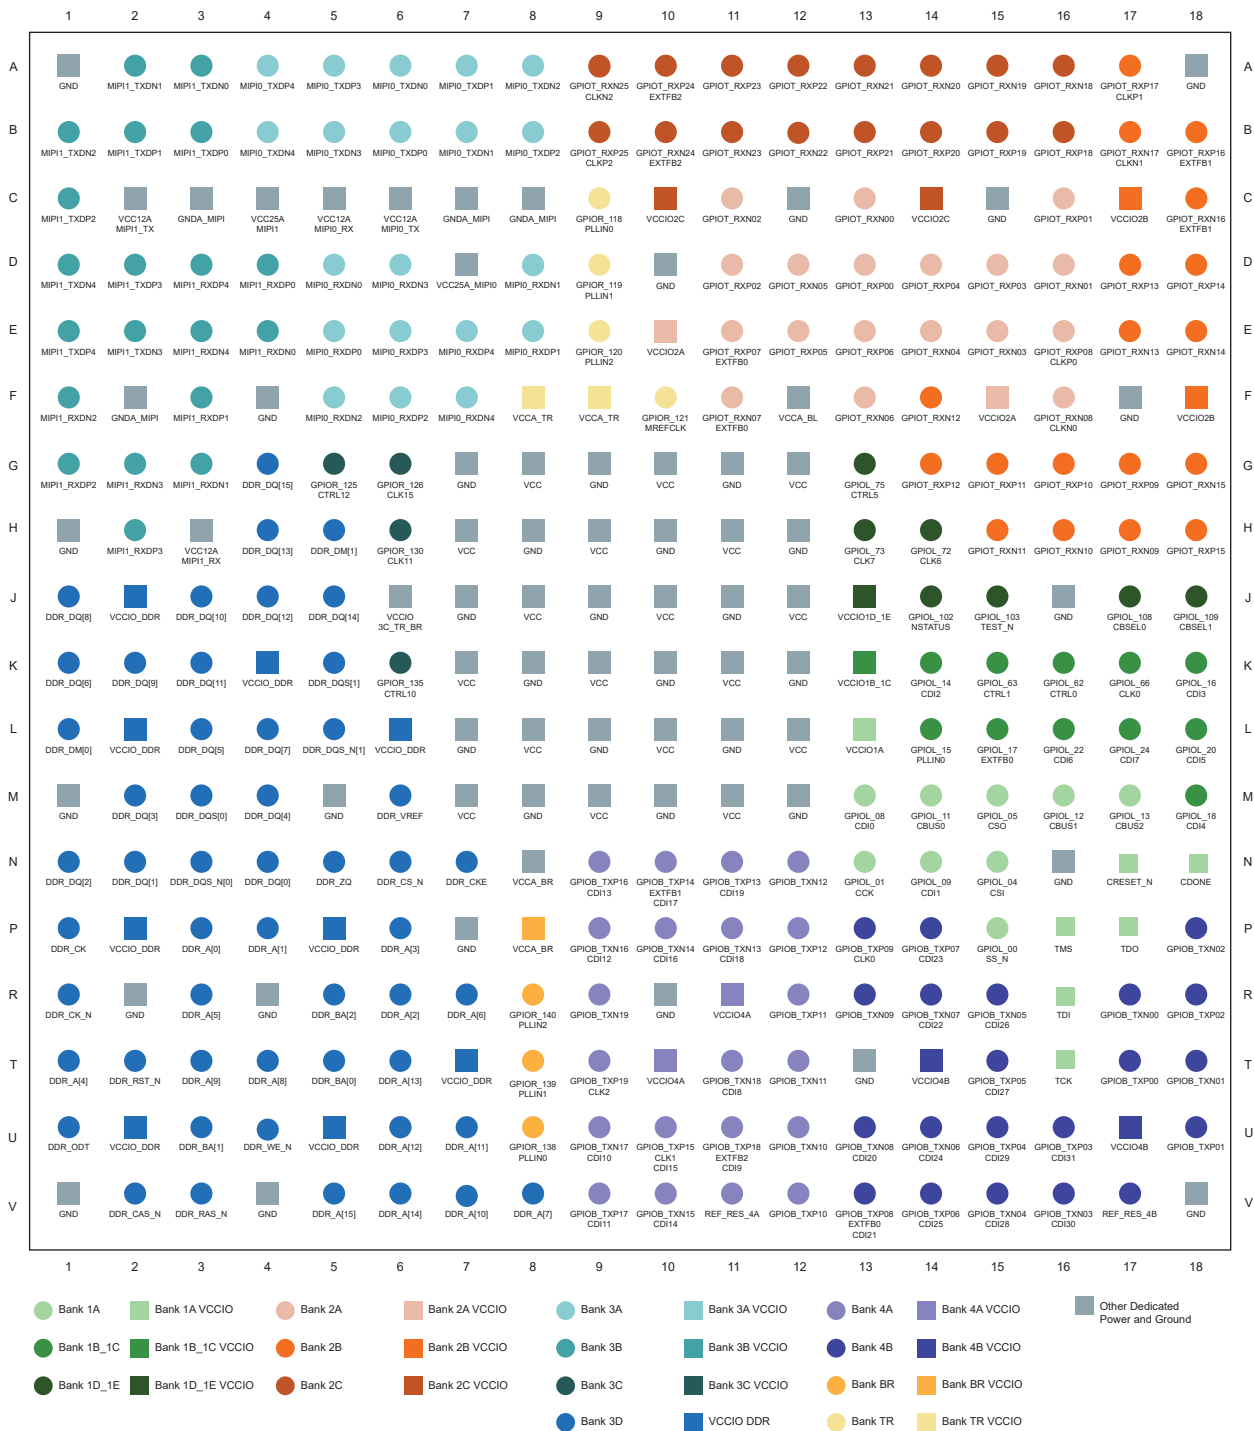

## Package Outline and Marking

Figure 35: 324-Ball FBGA Package Outline (T20 and T35)


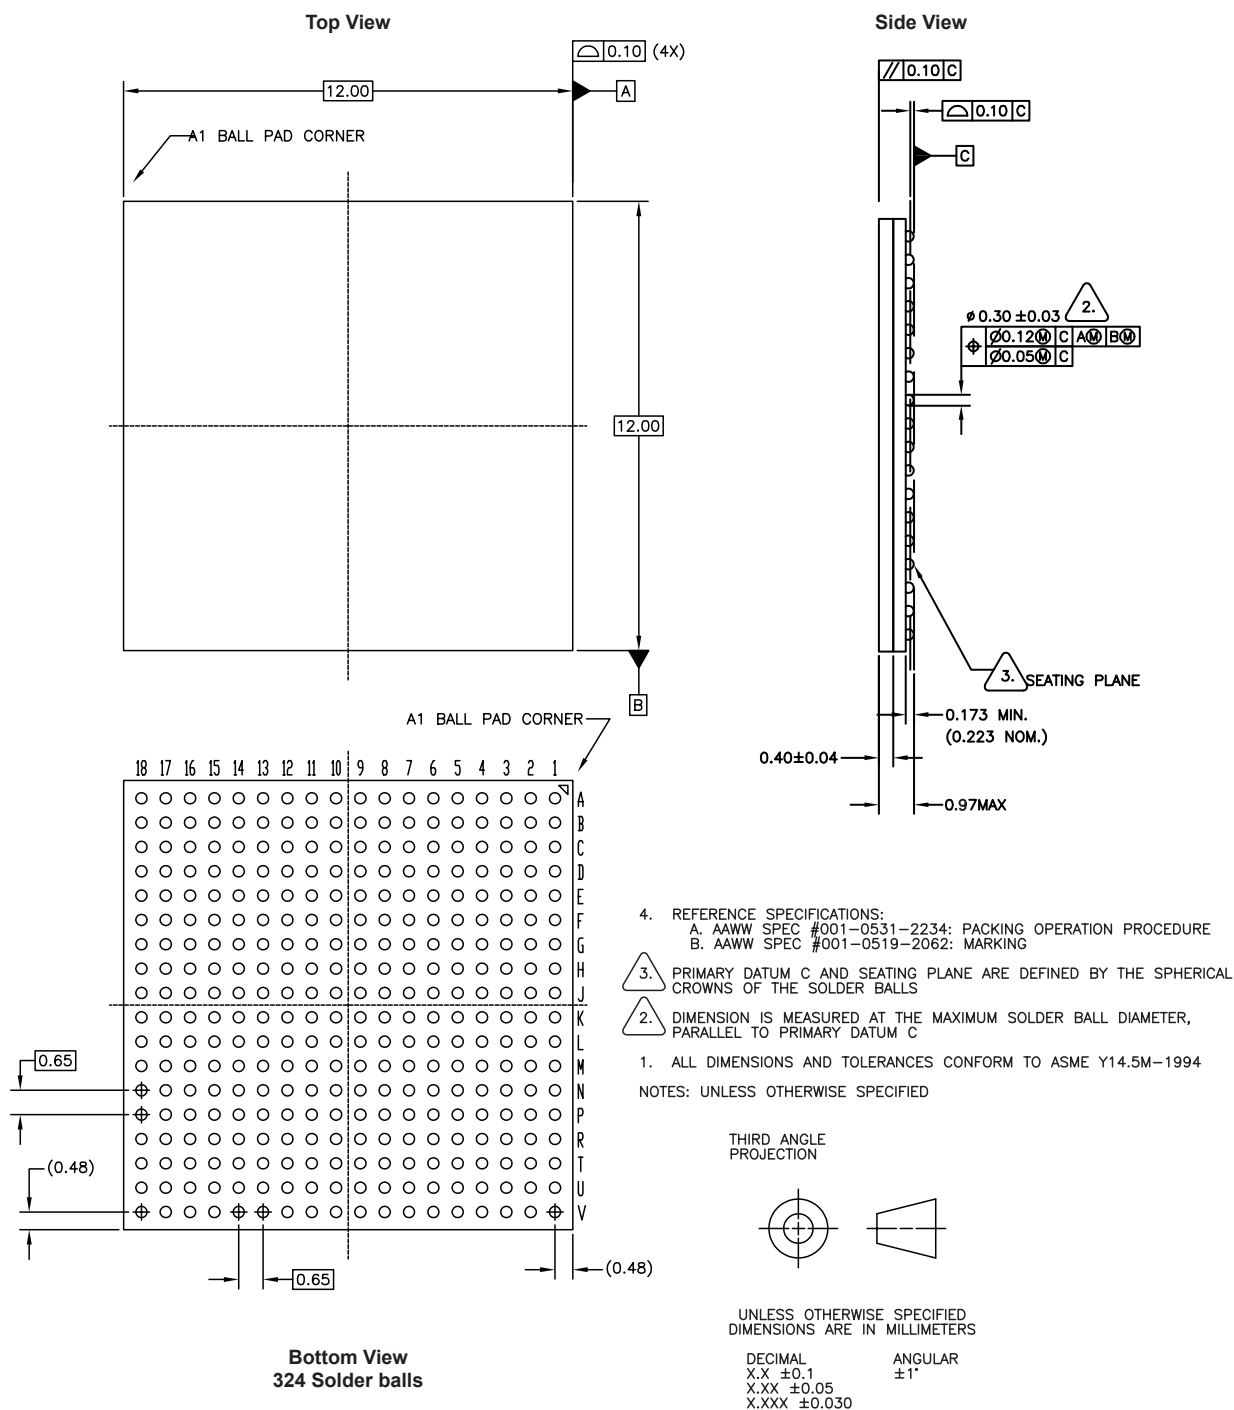


Figure 36: 324-Ball FPGA Package Marking (T20 and T35)

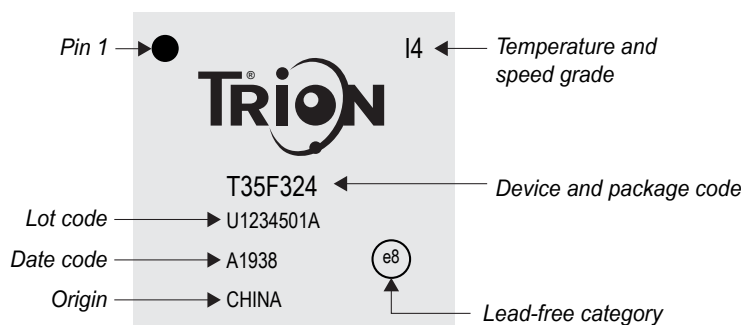

# T55, T85, and T120 FPGAs

## Pinout and I/O Banks

Figure 37: 324-Ball FBGA Pinout Diagram (T55, T85, and T120)


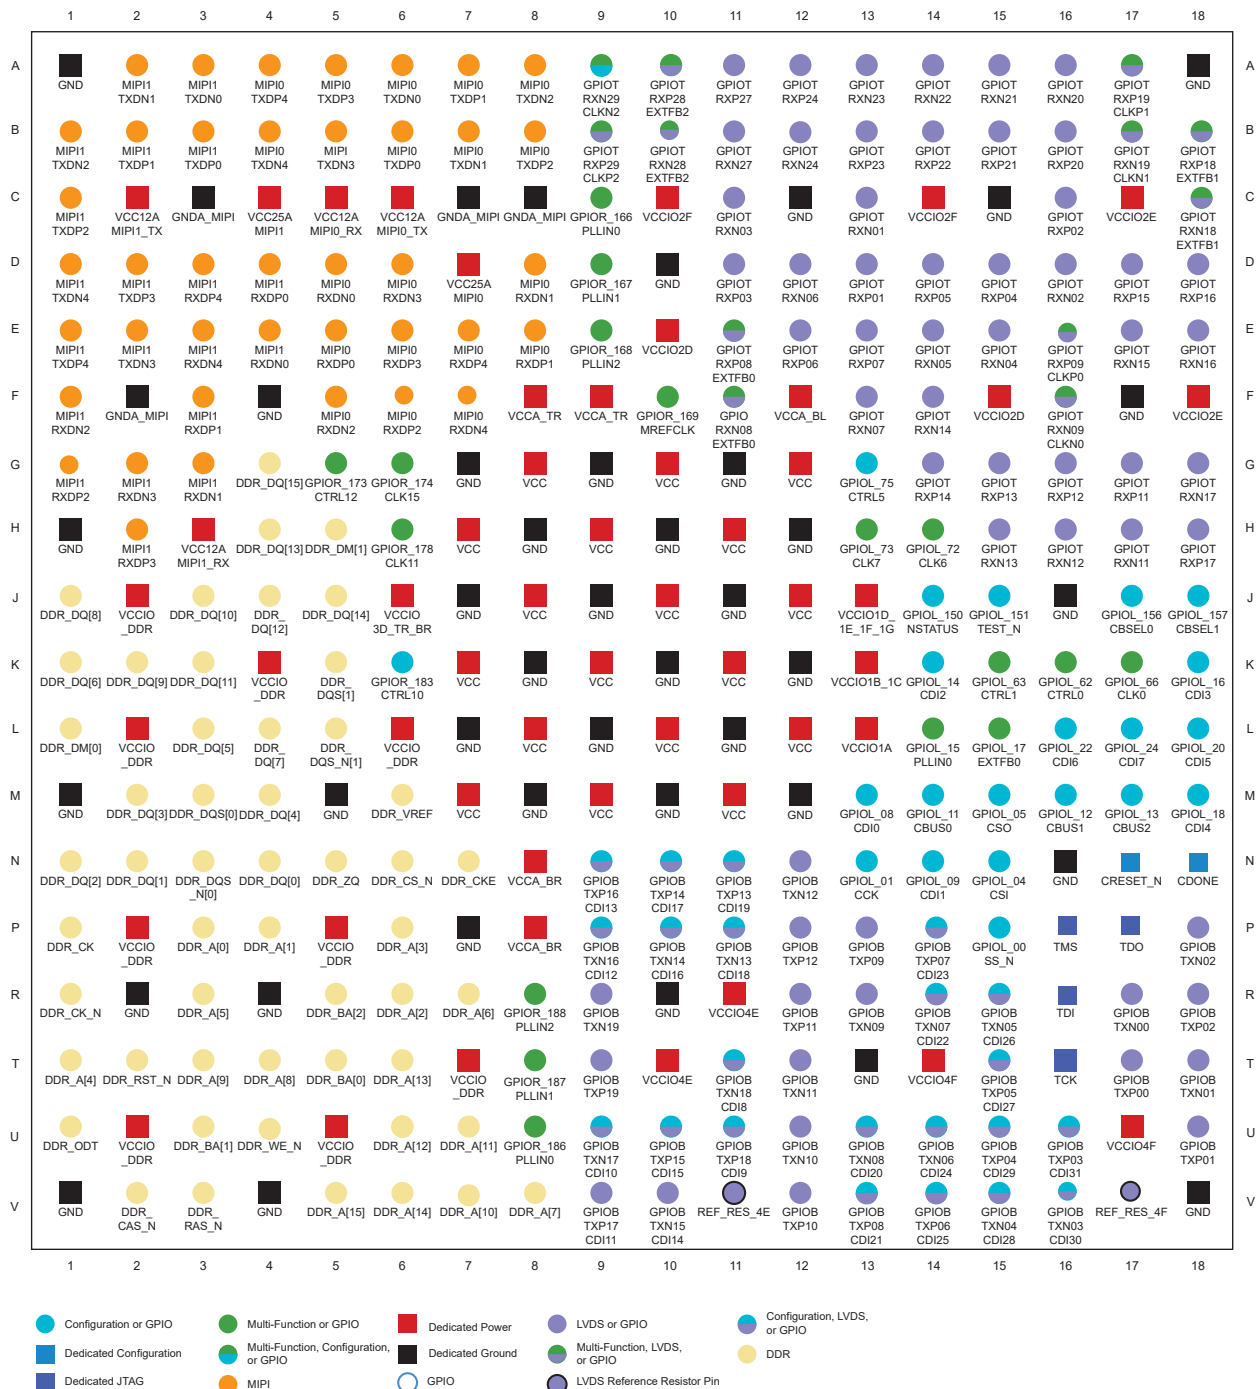


Figure 38: 324-Ball FBGA I/O Bank Diagram (T55, T85, and T120)

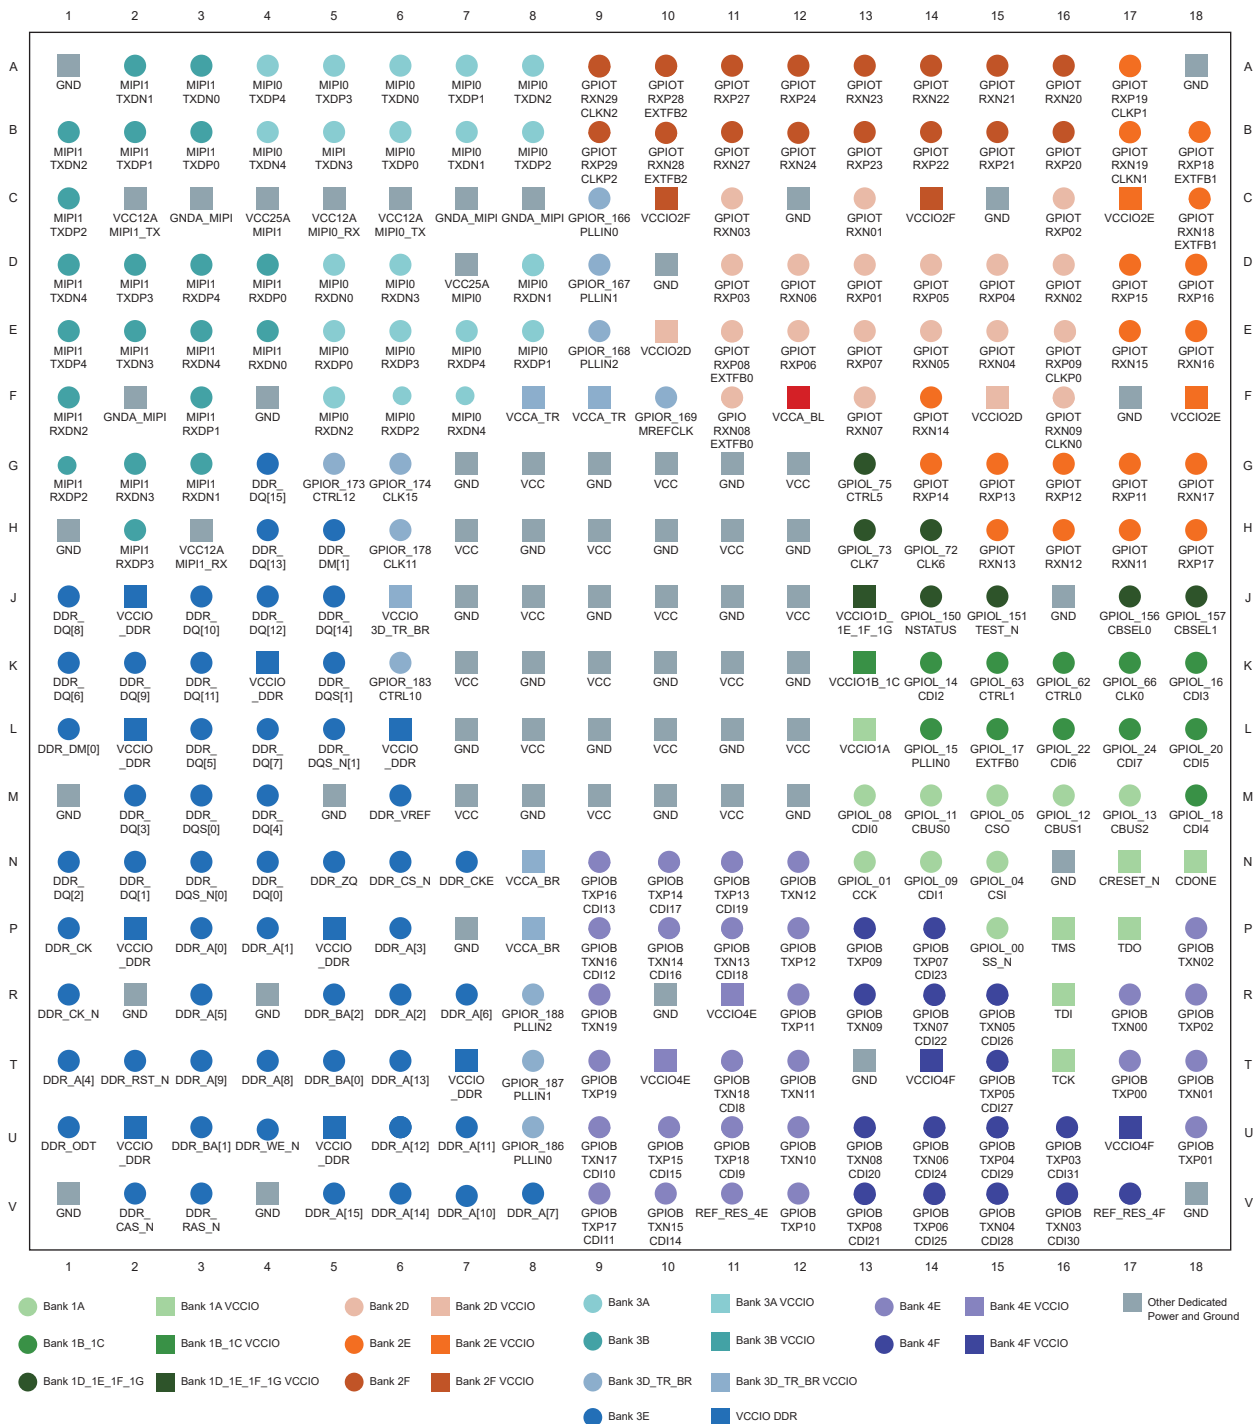

## Package Outline and Marking

Figure 39: 324-Ball FBGA Package Outline (T55, T85, and T120)


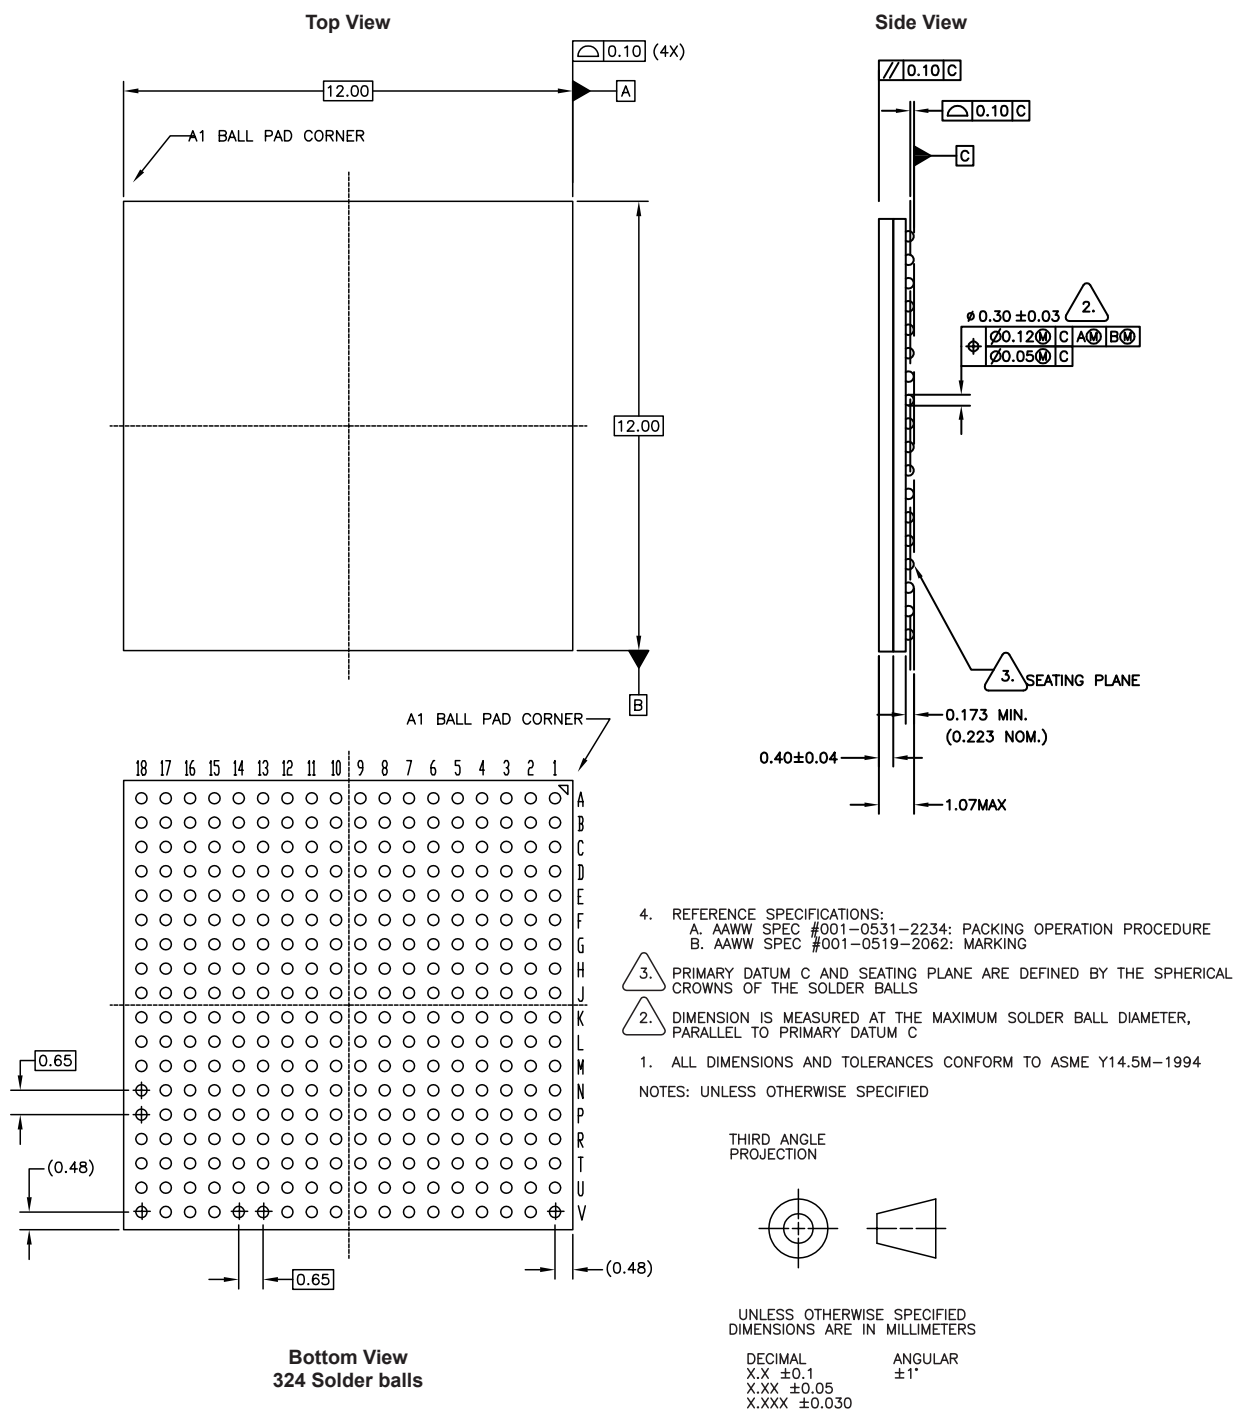



Figure 40: 324-Ball FPGA Package Marking (T55, T85, and T120)

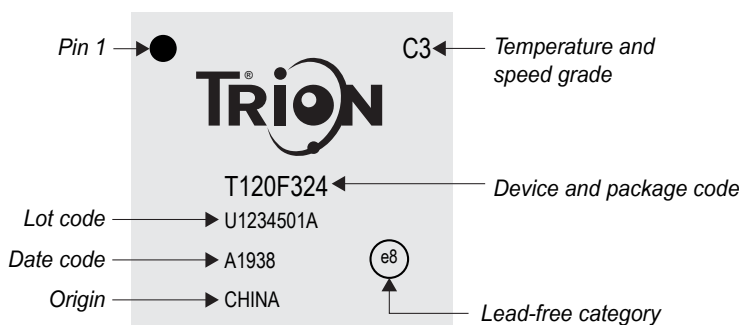


# 400-Ball FBGA Package Specifications

The following figures show the pin, I/O bank locations, package top-side marking, and outlines for this package. This is a flip chip package. FPGAs in this package are pin compatible.


Figure 41: 400-Ball FBGA Pinout Diagram

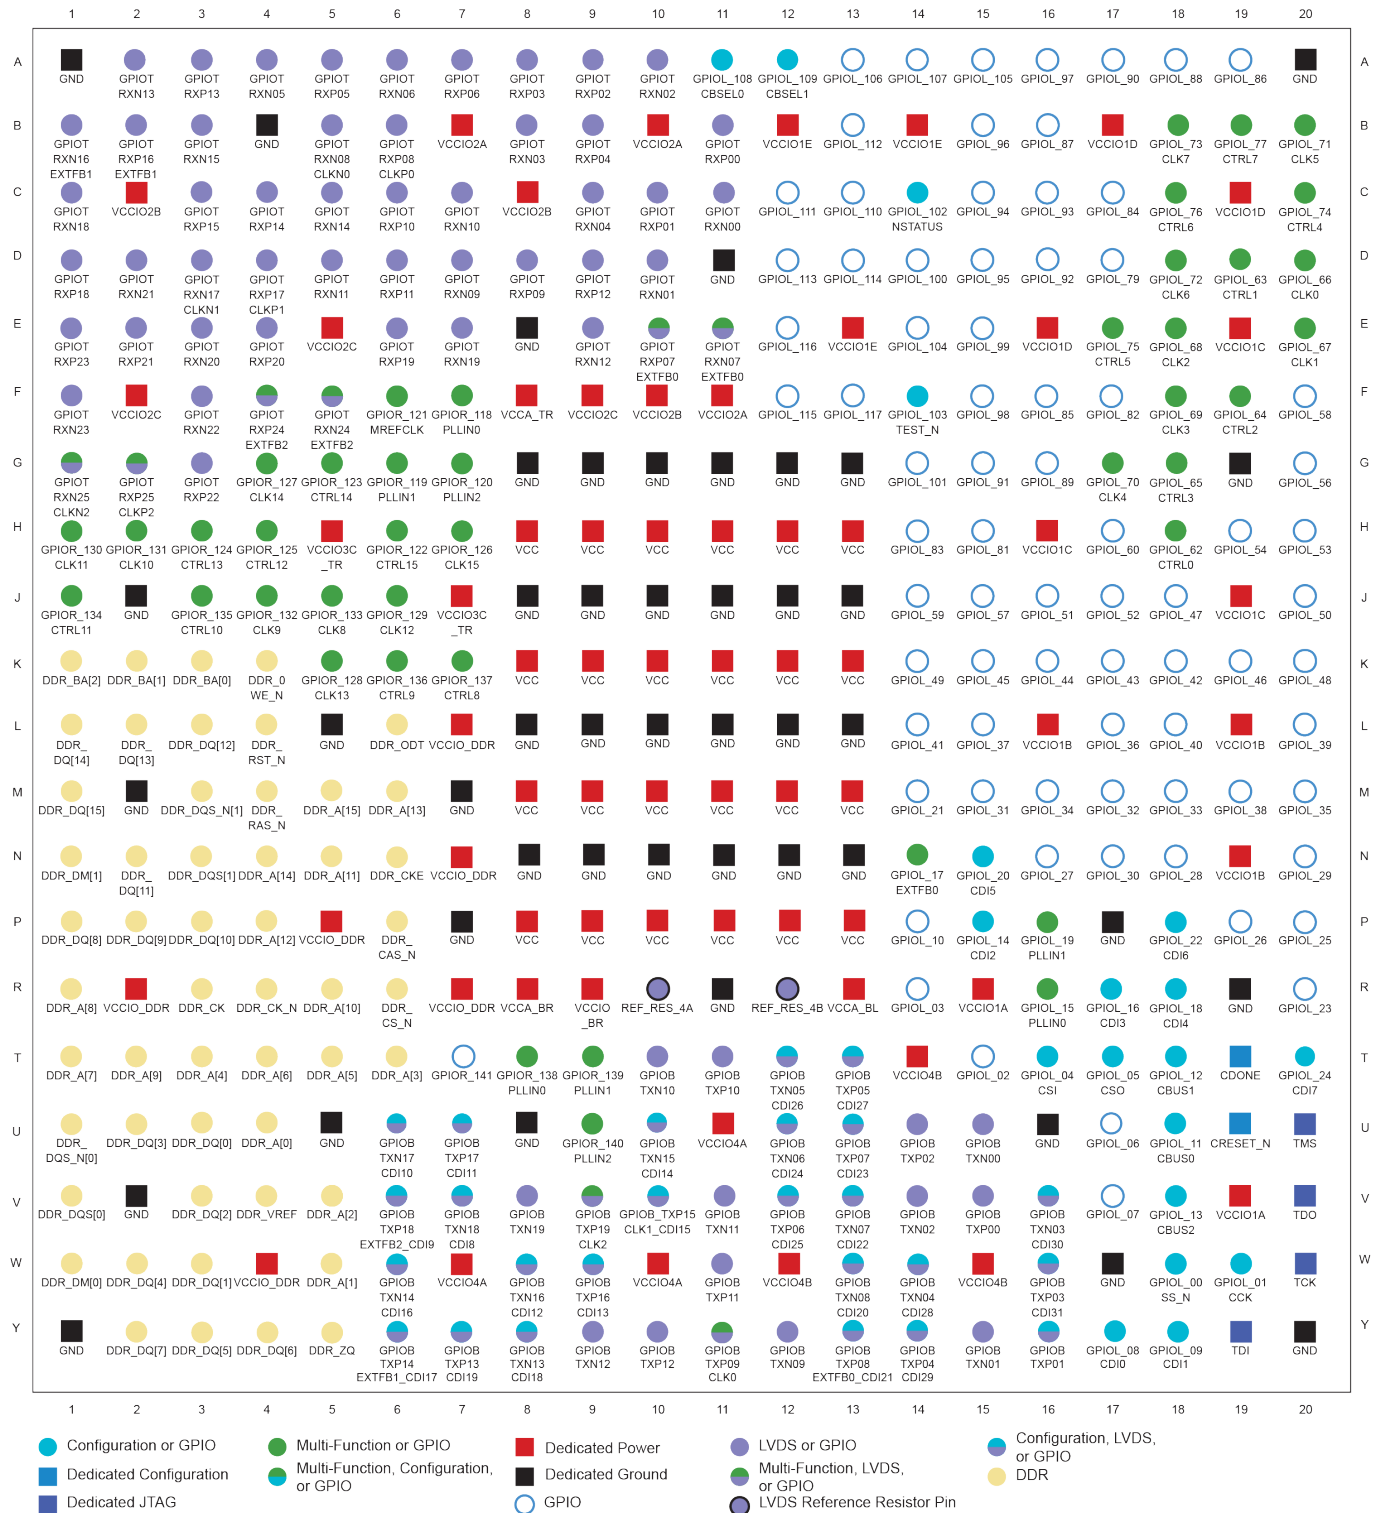


### Figure 42: 400-Ball FBGA I/O Bank Diagram

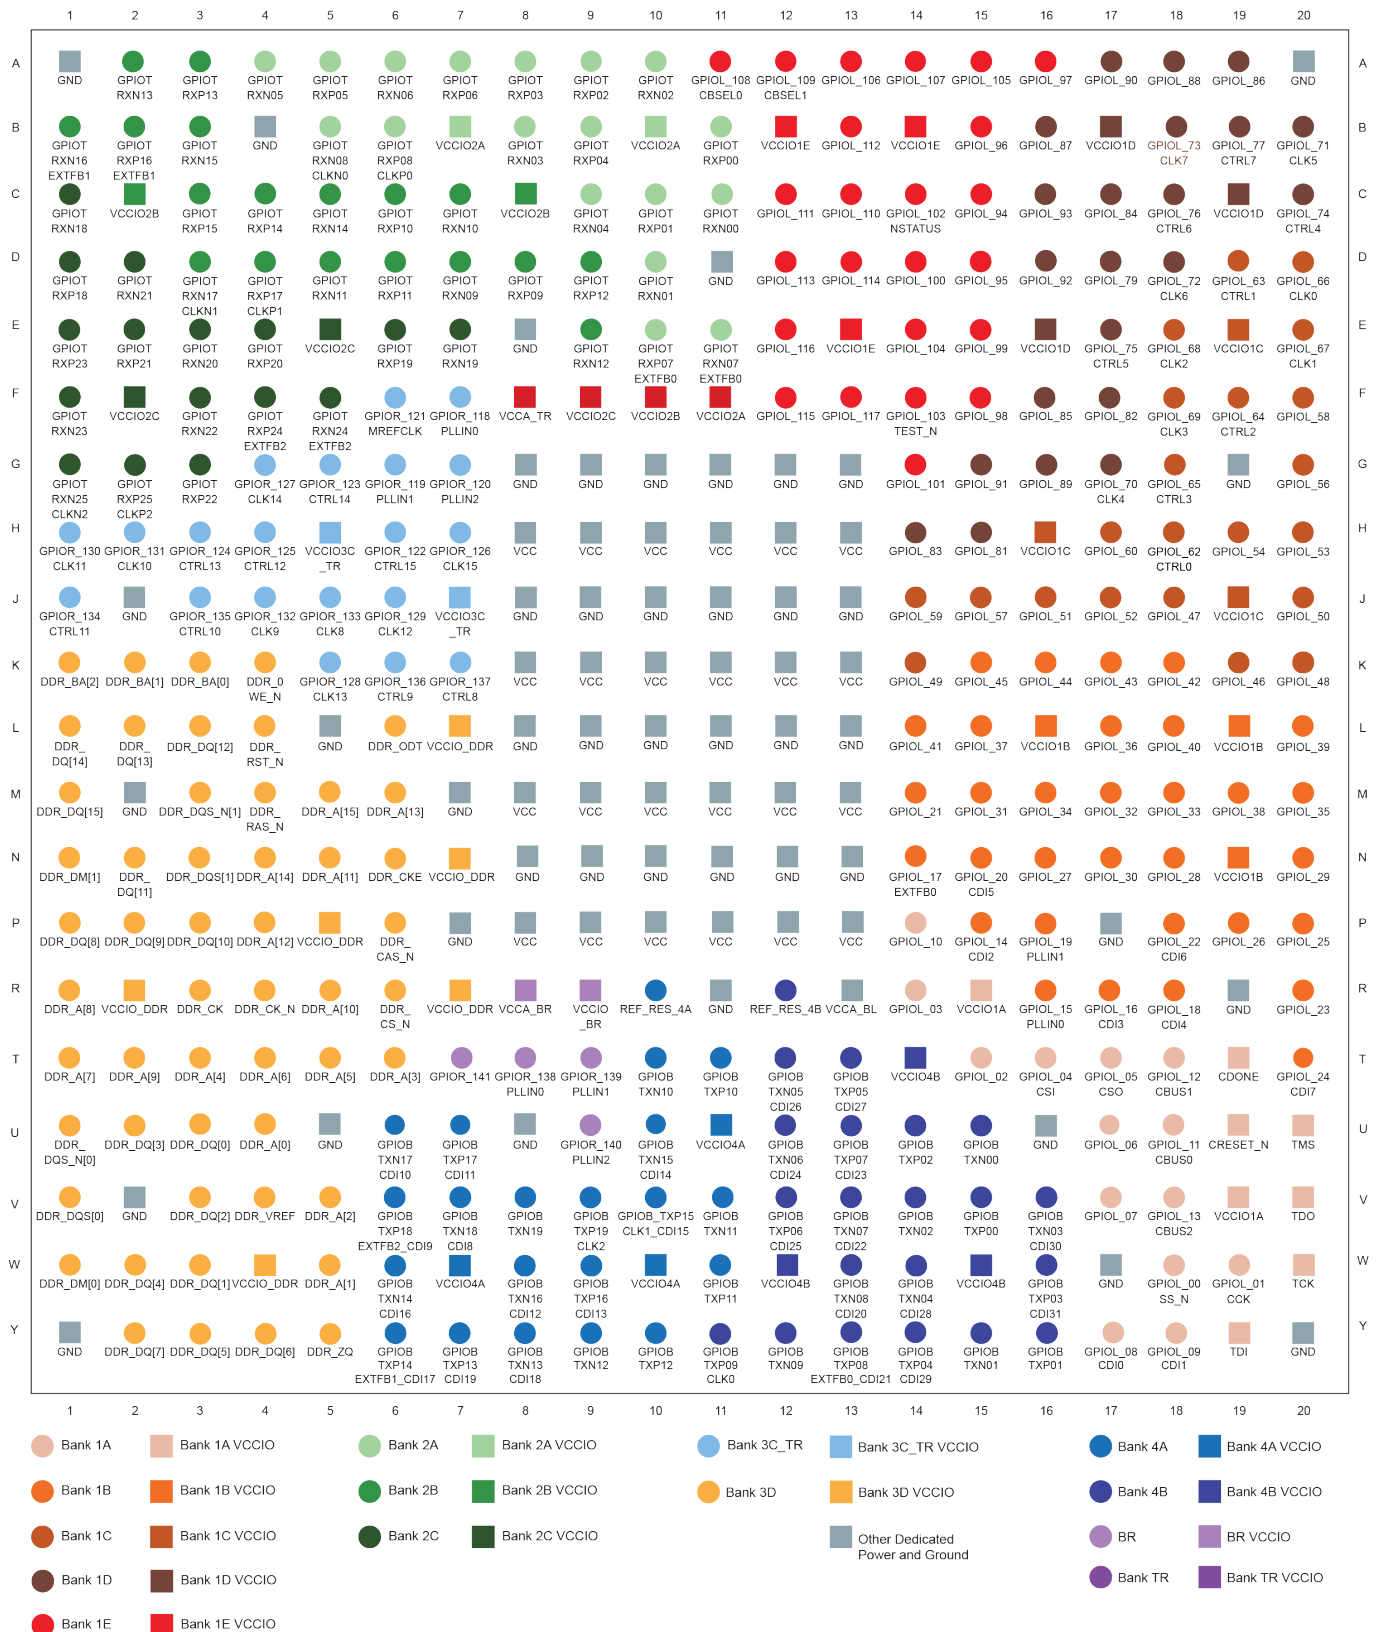

### Figure 43: 400-Ball FBGA Package Outline

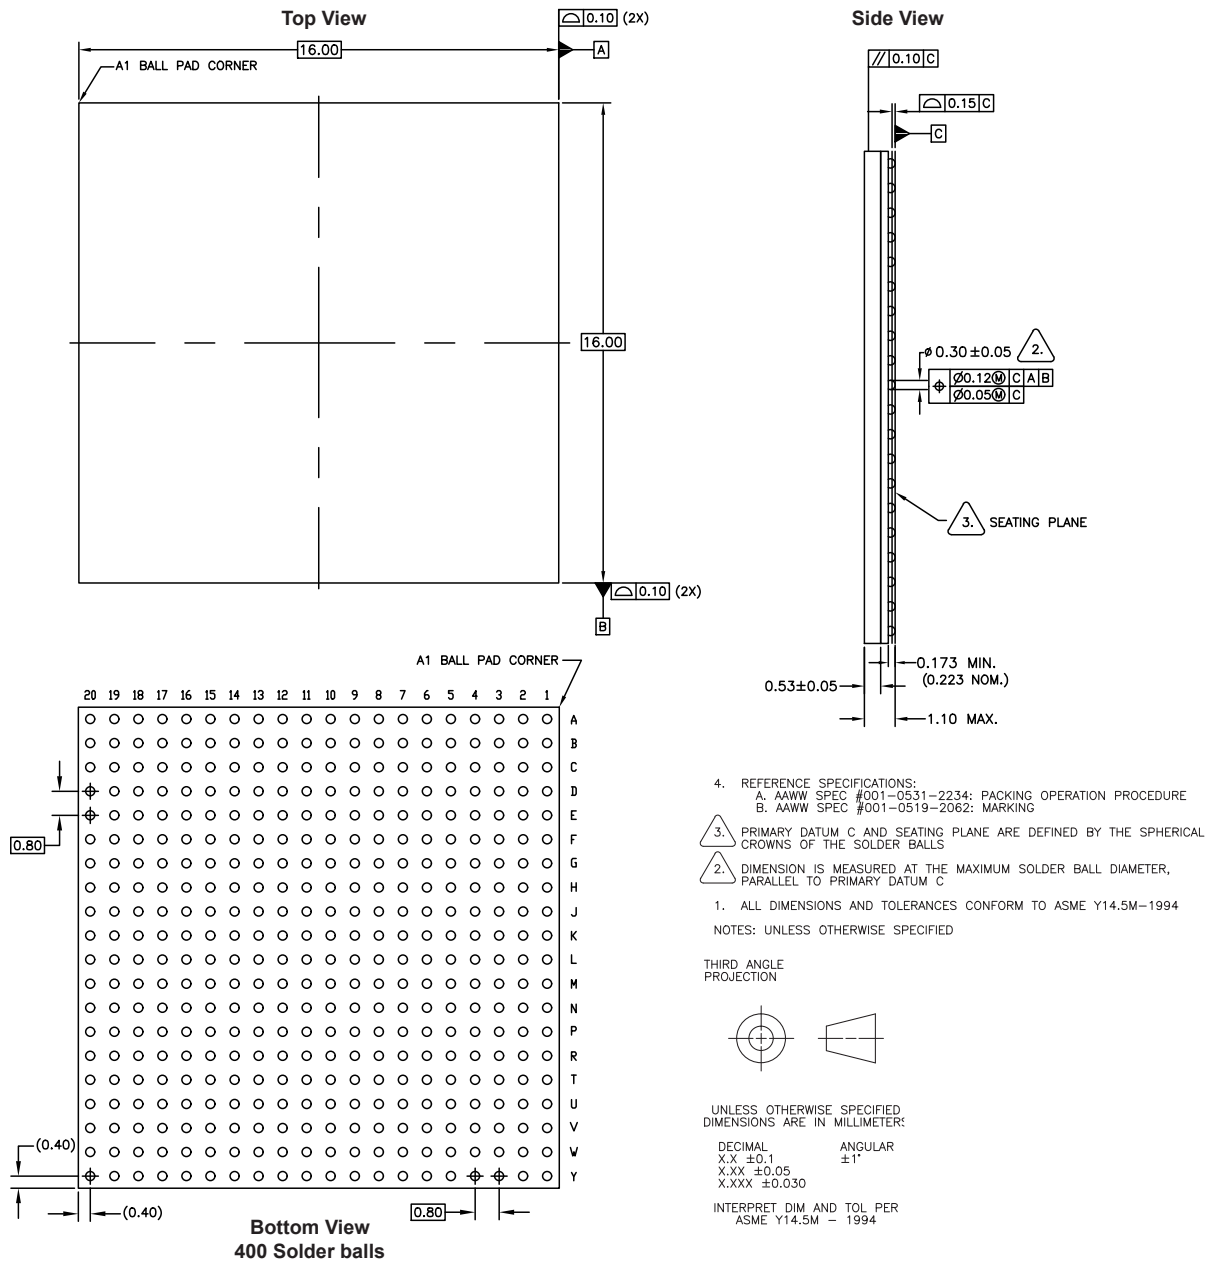

### Figure 44: 400-Ball FPGA Package Marking

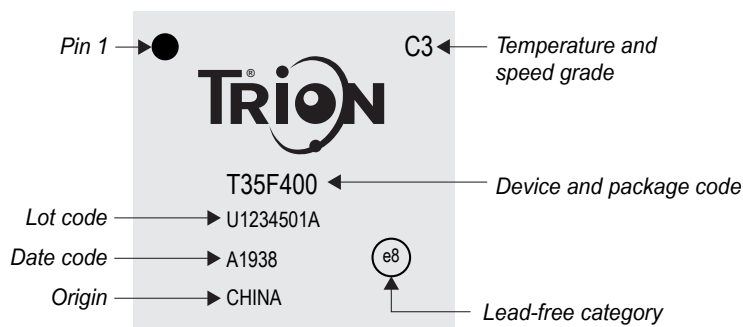


# 484-Ball FBGA Package Specifications

The following figures show the pin, I/O bank locations, package top-side marking, and outlines for this package. FPGAs in this package are pin compatible.


Figure 45: 484-Ball FBGA Pinout Diagram




Figure 46: 484-Ball FBGA I/O Bank Diagram

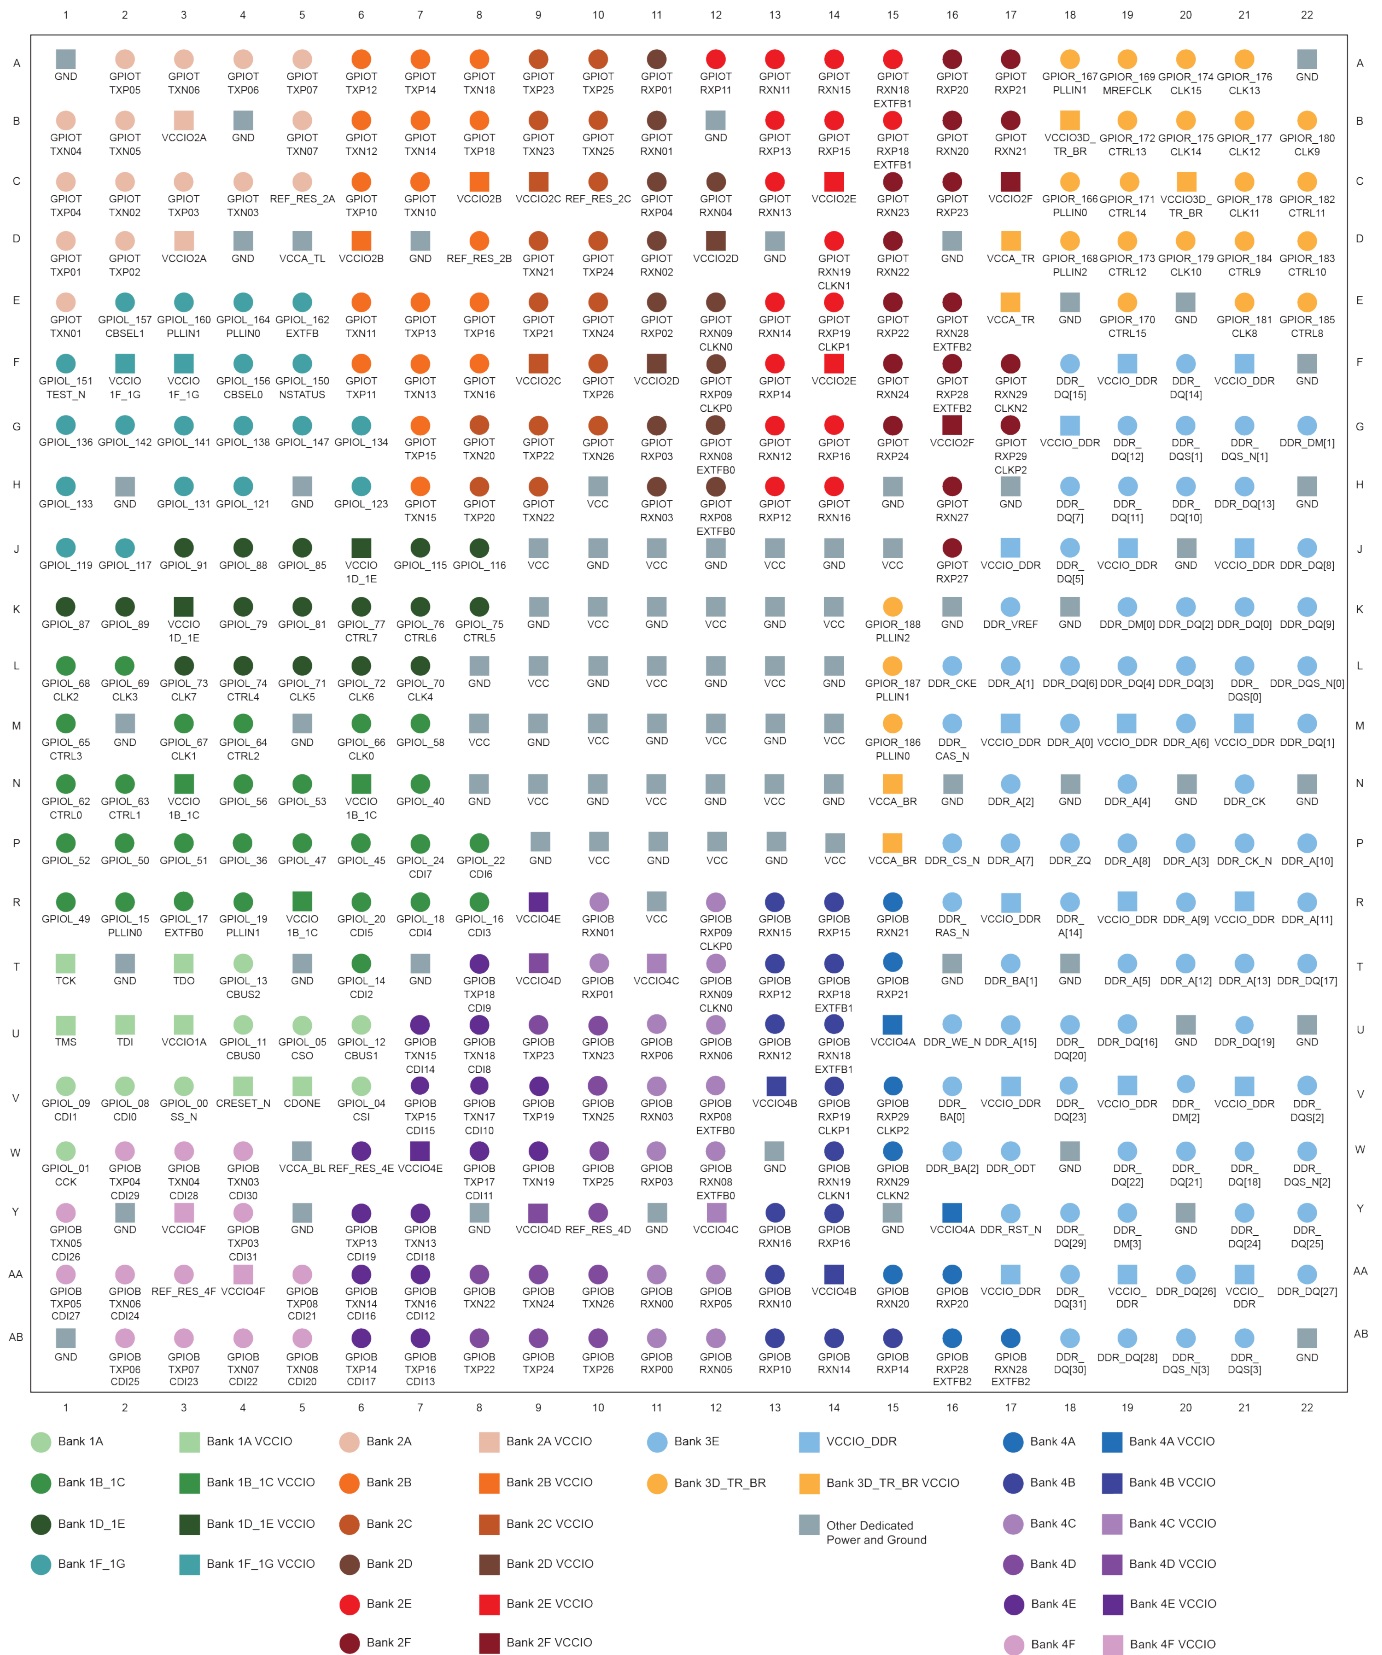

**Figure 47: 484-Ball FBGA Package Outline**

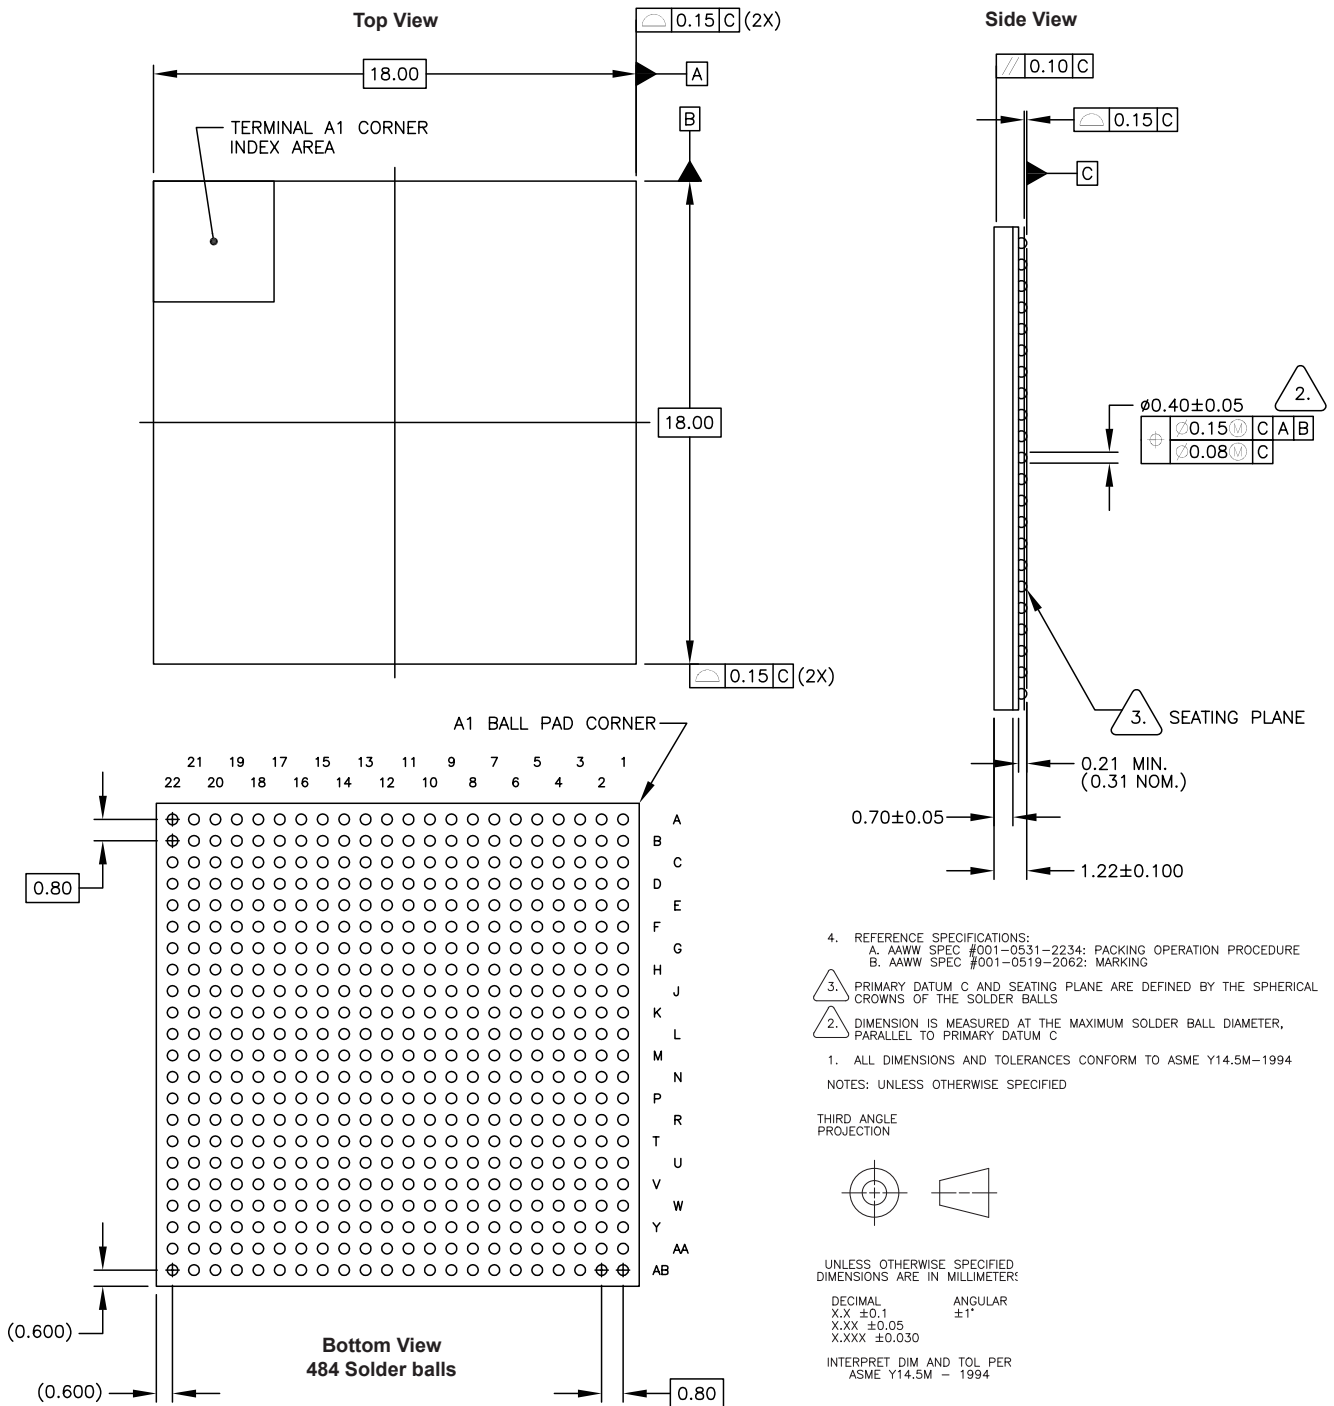

**Figure 48: 484-Ball FPGA Package Marking**

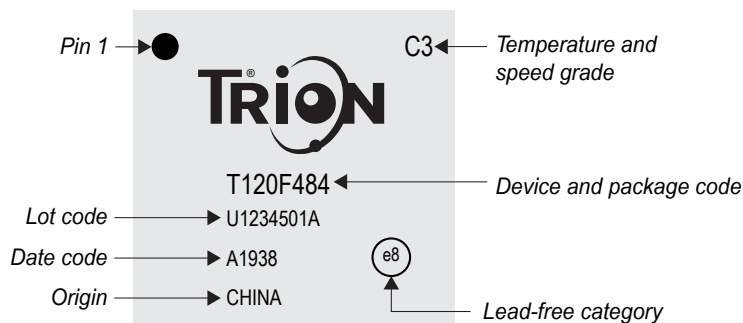


# 576-Ball FBGA Package Specifications

The following figures show the pin, I/O bank locations, package top-side marking, and outlines for this package. This is a flip chip package. FPGAs in this package are pin compatible.


Figure 49: 576-Ball FBGA Pinout Diagram




Figure 50: 576-Ball FBGA I/O Bank Diagram

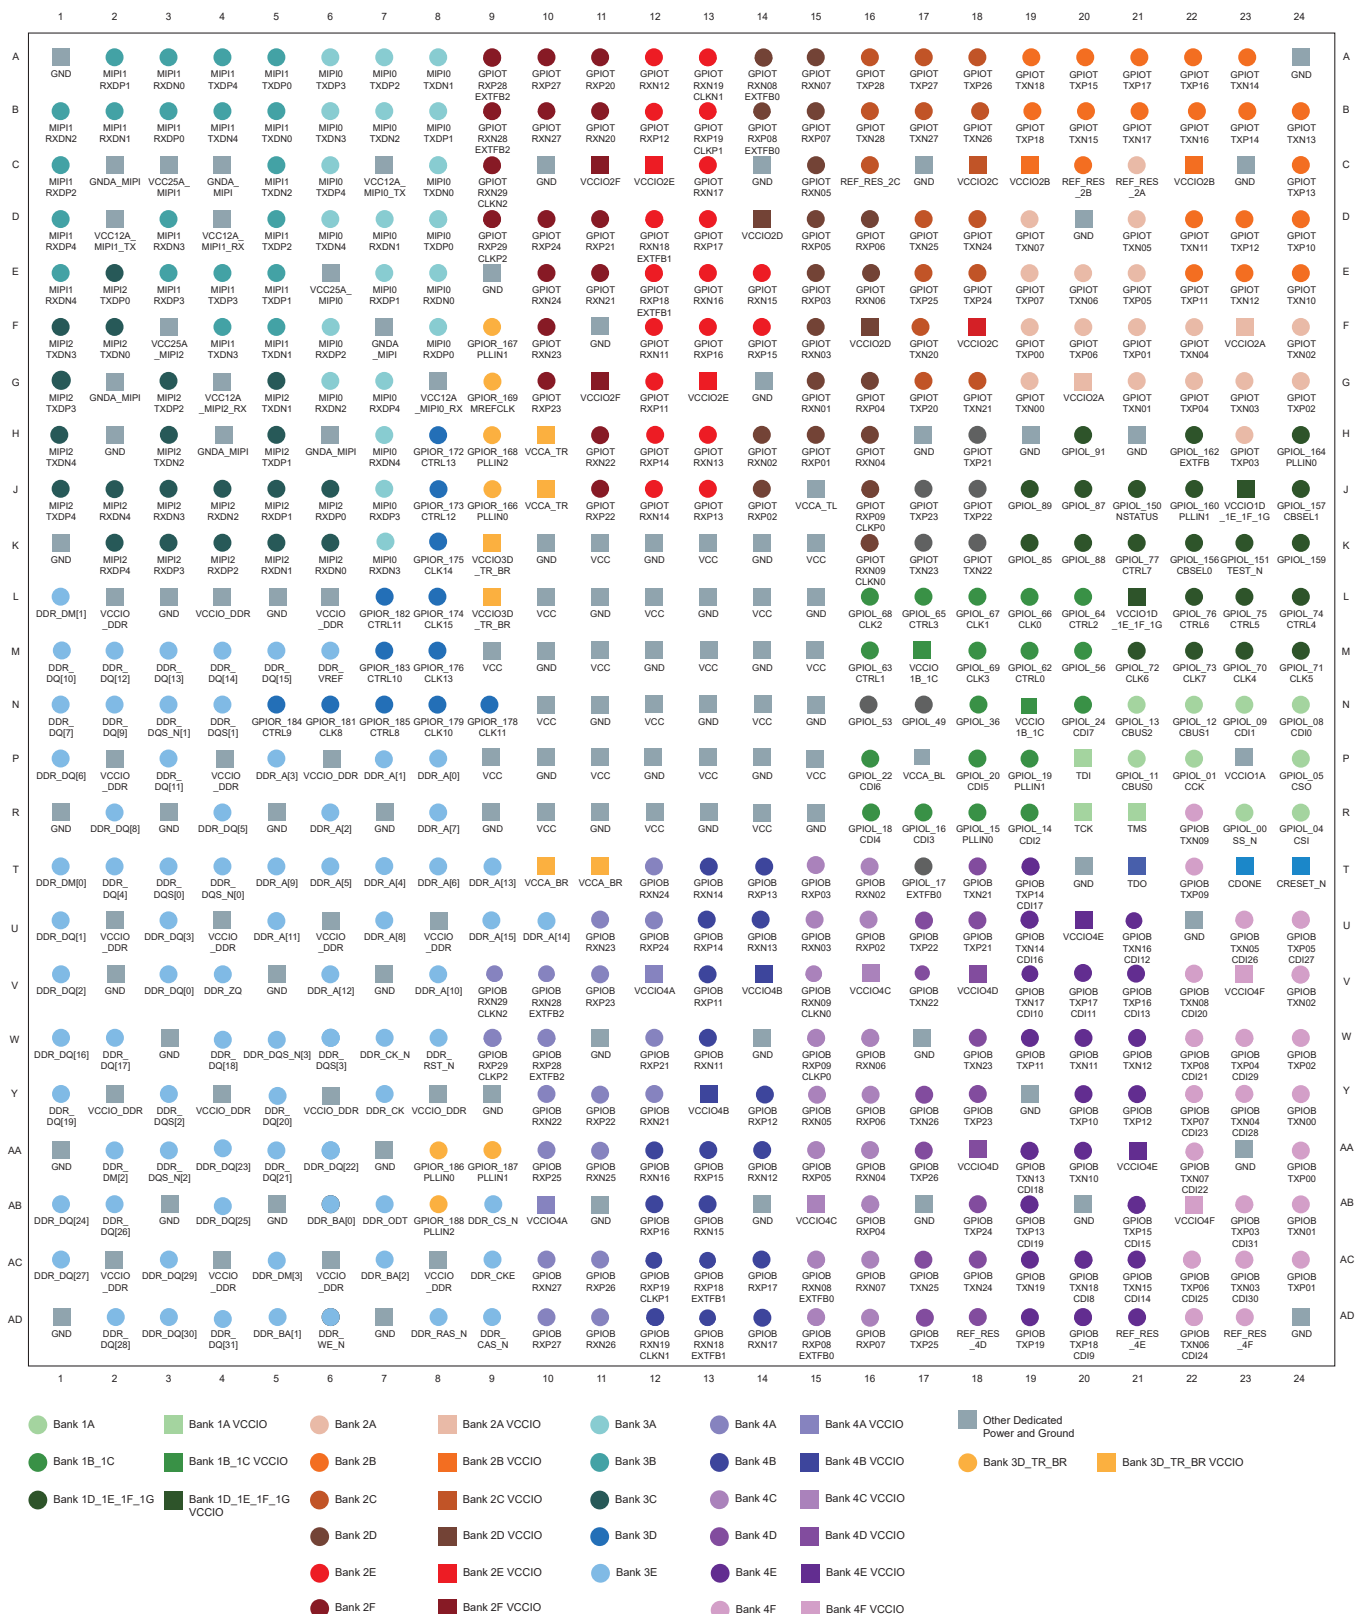

### Figure 51: 576-Ball FBGA Package Outline

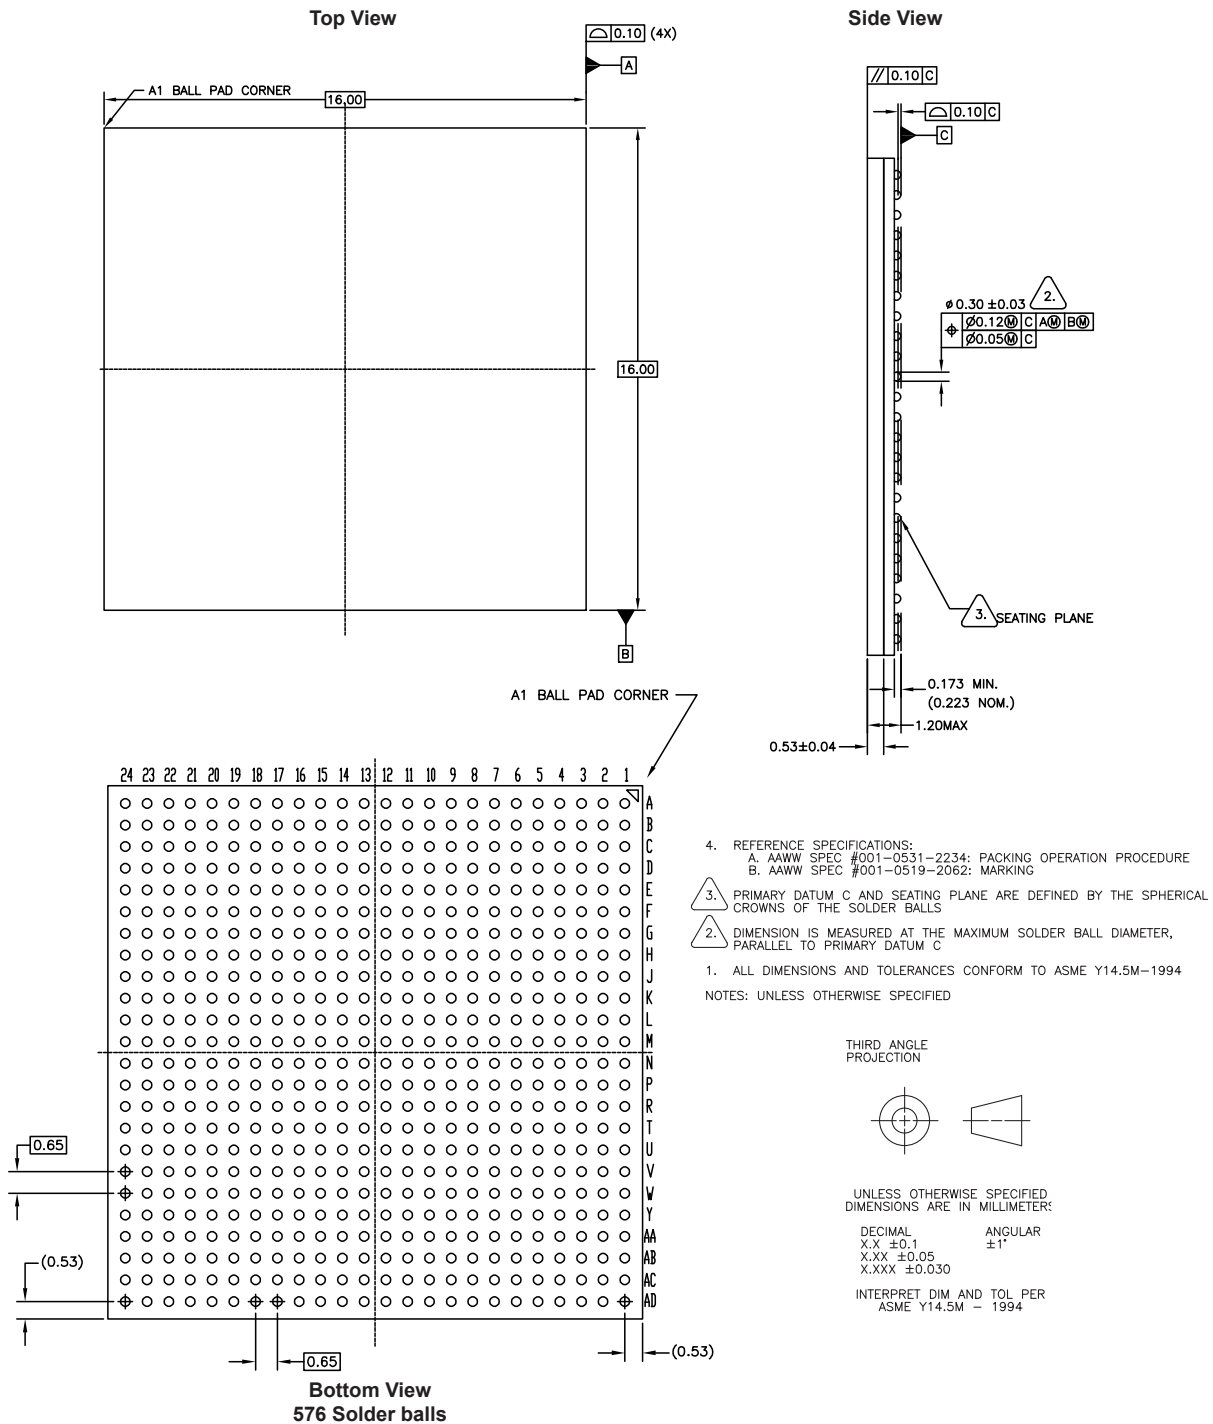

### Figure 52: 576-Ball FPGA Package Marking

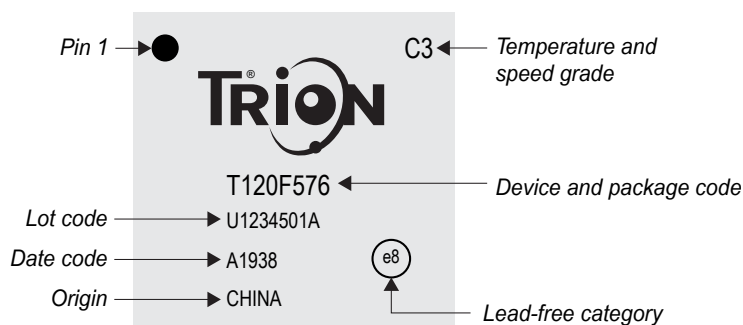

# Solder Reflow Guidelines for Surface-Mount Devices

This section provides general guidelines for solder reflow process for Elitestek® surface-mount FPGAs. The data used in this document is based on IPC/JEDEC (Association Connecting Electronics Industries/JEDEC Solid State Technology Association) standards. Each printed circuit board (PCB) has its profile, which depends upon the board design and the reflow equipment used. You must characterize each PCB to find a reliable profile.

## Reflow

During solder reflow, follow these guidelines:

- Use caution when profiling to ensure that the maximum temperature difference between components is less than 10 °C.
- For best results, perform forced convection reflow with nitrogen.

## Inspection

Follow these inspection guidelines:

- **Pre-reflow**—Use visual inspection to verify solder paste dispense location and quantity.
- **Pick and place**—Use machine vision as necessary to ensure proper component placement.
- **Post reflow**—Use electrical testing to verify solder joint formation.

## BGA Reballing

Elitestek does not recommend BGA reballing. Reballled BGA packages will void the original Elitestek® specifications.

## Peak Reflow Temperatures

Table 8: Peak Reflow Temperature ( $T_p$ ) by Package

| Package | Number of Leads/Balls | Moisture Sensitivity Level | Peak Reflow Temperature (+0/-5 °C) |
|---------|-----------------------|----------------------------|------------------------------------|
| FBGA    | 49                    | 3                          | 260                                |
| WLCSP   | 80                    | 1                          | 260                                |
| FBGA    | 81                    | 3                          | 260                                |
| LQFP    | 100                   | 3                          | 260                                |
| FBGA    | 169                   | 3                          | 260                                |
| FBGA    | 256                   | 3                          | 260                                |
| FBGA    | 324                   | 3                          | 260                                |
| FBGA    | 400                   | 3                          | 260                                |
| FBGA    | 484                   | 3                          | 260                                |
| FBGA    | 576                   | 3                          | 260                                |
| LQFP    | 144                   | 3                          | 260                                |

Table 9: Peak Reflow Temperature ( $T_p$ ) by Package

| Package | Moisture Sensitivity Level | Peak Reflow Temperature (+0/-5 °C) |
|---------|----------------------------|------------------------------------|
| FBGA    | 3                          | 260                                |



**Note:** These packages are "green" and RoHS compliant.

## Reflow Profile for SMT Packages


The reflow process usually includes four phases:

1. **Preheat Phase**—The preheat phase brings the assembly from 25 °C to  $T_S$ . During this phase, the solvent evaporates from the solder paste. The preheat temperature ramp rate should be less than 2 °C/second to avoid solder balling defects such as solder ball spattering and bridging.
  - **Solder Ball Spattering**—Spattering, the most common solder balling defect, is caused by solvents evaporating explosively. To eliminate spattering, use a slower temperature rise in the preheat phase.
  - **Bridging**—Bridging is usually caused by inaccurate or splashy screen printing, and can often occur with fine pitch components. It can also be caused by solder paste slumping during a rapid temperature rise in the preheat phase.
2. **Flux Activation Phase**—As the temperature rises slowly, it reaches a point at which the flux completely wets the surfaces to be soldered.
3. **Reflow Phase**—The temperature rises to a level sufficient to reflow the solder. The flux wicks surface oxides and contaminants away from the melted solder, resulting in a clean solder joint.
4. **Cool Down Phase**—Ramp down the temperature as fast as possible to control grain size; however, do not exceed 6 °C/second.

Table 10: Peak Reflow Temperature ( $T_p$ ) Parameters

| Parameter                 | Description                                  | Specification (Lead and Halogen Free Packages) |
|---------------------------|----------------------------------------------|------------------------------------------------|
| Ramp up                   | Average ramp-up rate ( $T_{SMAX}$ to $T_p$ ) | 3 °C/second maximum                            |
| $T_{SMIN}$                | Preheat peak minimum temperature             | 150 °C                                         |
| $T_{SMAX}$                | Preheat peak maximum temperature             | 200 °C                                         |
| $t_s$                     | Time between $T_{SMIN}$ and $T_{SMAX}$       | 60 - 120 seconds                               |
| $T_L$                     | Solder melting point                         | 217 °C                                         |
| $t_L$                     | Time maintained above $T_L$                  | 60 - 150 seconds                               |
| $t_p$                     | Time within 5 °C of peak temperature         | 30 seconds                                     |
| Ramp down                 | Ramp-down rate                               | 6 °C/second maximum                            |
| $t_{25C \text{ to } T_p}$ | Time from 25 °C to peak temperature          | 8 minutes maximum                              |

Figure 53: Thermal Reflow Profile

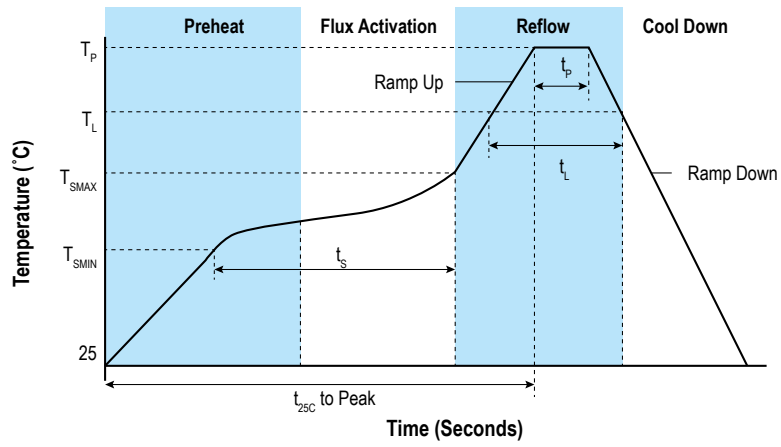

# Thermal Resistance

Thermal management is an important consideration when designing your system. Elitestek® device data sheets describe the maximum allowable junction temperature so you can assess your system's thermal characteristics. To ensure that the device and package do not exceed the junction temperature requirements, you should always complete a thermal analysis of your specific design.

The data shown in this section is relative and actual values depend on a variety of factors, such as die size, paddle size, airflow, power applied, printed circuit board design, the proximity of other devices, and user applications. Because of this, Elitestek FPGAs do not come with preset thermal solutions.

**Table 11: Device/Package Thermal Resistance**

| Device         | Package | Dimensions (mm) | $\Theta_{JA}$ (°C/W)<br>Still Air | $\Theta_{JA}$ (°C/W)<br>1 m/s | $\Theta_{JA}$ (°C/W)<br>2.5 m/s | $\Theta_{JB}$ (°C/W) | $\Theta_{JC}$ (°C/W) |
|----------------|---------|-----------------|-----------------------------------|-------------------------------|---------------------------------|----------------------|----------------------|
| T4, T8         | FBGA49  | 3 x 3           | 90.446                            | 84.782                        | 81.797                          | 56.464               | 46.431               |
|                | FBGA81  | 5 x 5           | 80.476                            | 75.363                        | 72.797                          | 55.352               | 32.583               |
| T8, T20        | LQFP144 | 20 x 20         | 42.82                             | 37.68                         | 35.50                           | 31.12                | 10.51                |
| T13, T20       | LQFP100 | 14 x 14         | 51.29                             | 45.64                         | 43.40                           | 37.70                | 15.21                |
|                | FBGA169 | 9 x 9           | 38.25                             | 33.33                         | 31.60                           | 23.64                | 12.39                |
|                | FBGA256 | 13 x 13         | 24.24                             | 20.52                         | 17.59                           | 31.57                | 11.85                |
| T20            | WLCSP80 | 4.5 x 3.5       | 44.94                             | 39.35                         | 37.54                           | 18.91                | 0.12                 |
| T20, T35       | FBGA256 | 13 x 13         | 22.73                             | 19.35                         | 17.96                           | 6.41                 | 12.06                |
|                | FBGA324 | 12 x 12         | 20.69                             | 17.89                         | 16.89                           | 10.12                | 2.59                 |
|                | FBGA400 | 16 x 16         | 18.70                             | 16.95                         | 15.92                           | 12.45                | 11.10                |
| T55, T85, T120 | FBGA324 | 12 x 12         | 16.9                              | 14.4                          | 13.5                            | 8.04                 | 2.01                 |
|                | FBGA484 | 18 x 18         | 15.85                             | 12.83                         | 11.99                           | 6.10                 | 4.10                 |
|                | FBGA576 | 16 x 16         | 15.376                            | 13.648                        | 12.568                          | 6.601                | 1.712                |

Where:

- $\Theta_{JA}$  is the junction-to-ambient thermal resistance
- $\Theta_{JB}$  is the junction-to-board thermal resistance
- $\Theta_{JC}$  is the junction-to-case thermal resistance


# PCB Guidelines for BGA Packages

## PCB Solder Pad Guidelines

Elitestek provides solder mask defined (SMD) and non-solder mask defined (NSMD) diameter information. Use this data when creating your board landing pads.

Non-solder-mask defined (NSMD) pad designs perform better than solder mask defined pads due to lower stresses in the solder near the top of pad. Additionally, they provide a better “grip” area around the pad edge. For best reliability, the Generic Requirements for Surface Mount Design and Land Pattern Standard (IPC-7351A) recommends a NSMD pad with a diameter that is slightly smaller than the solder ball.

**Figure 54: SMD and Non-SMD Pad Specification**

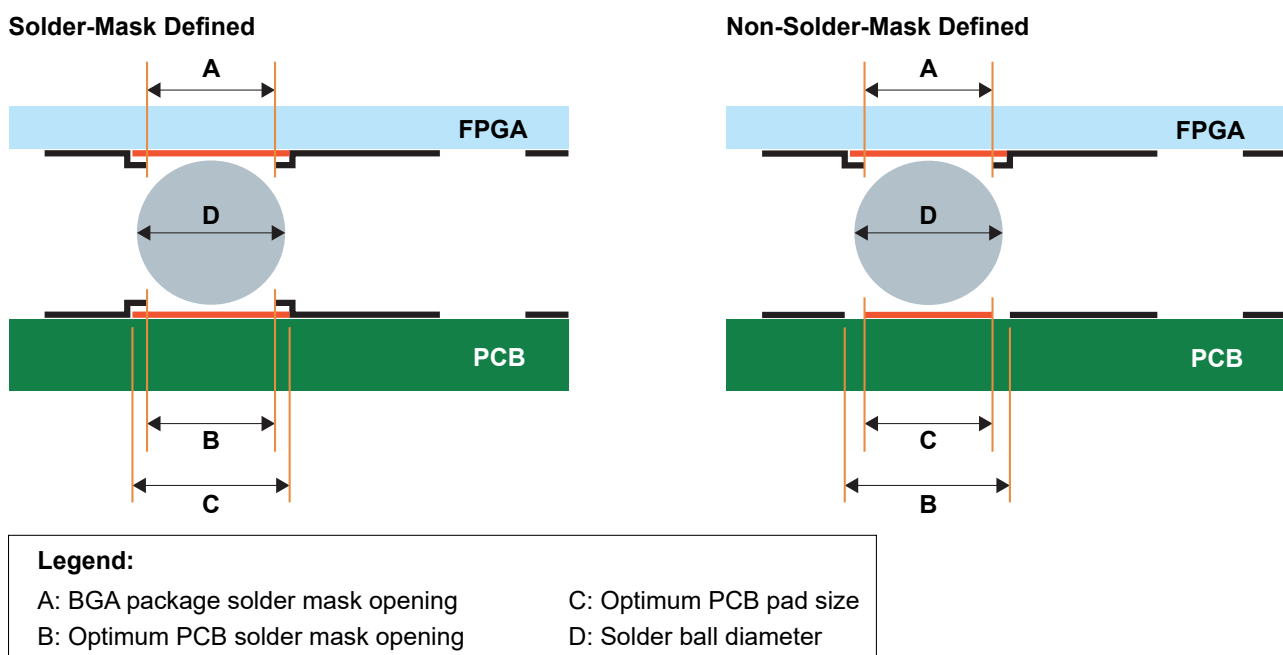


**Table 12: PCB Solder Pad Recommendations**

| Package                  | Pitch (mm) | A<br>BGA Package<br>Solder Mask<br>Opening (mm) | SMD                                             |                                      | Non-SMD                                         |                                      | D<br>Solder Ball<br>Diameter<br>(mm) |
|--------------------------|------------|-------------------------------------------------|-------------------------------------------------|--------------------------------------|-------------------------------------------------|--------------------------------------|--------------------------------------|
|                          |            |                                                 | B<br>Optimum PCB<br>Solder Mask<br>Opening (mm) | C<br>Optimum<br>PCB Pad<br>Size (mm) | B<br>Optimum PCB<br>Solder Mask<br>Opening (mm) | C<br>Optimum<br>PCB Pad<br>Size (mm) |                                      |
| F49                      | 0.4        | 0.2                                             | 0.2                                             | 0.275                                | 0.3                                             | 0.2                                  | 0.25                                 |
| W80                      | 0.4        | N.A.                                            | 0.175                                           | 0.225                                | 0.25                                            | 0.175                                | 0.2                                  |
| F81                      | 0.5        | 0.245                                           | 0.245                                           | 0.325                                | 0.4                                             | 0.2                                  | 0.25                                 |
| F169                     | 0.65       | 0.25                                            | 0.25                                            | 0.35                                 | 0.4                                             | 0.2                                  | 0.25                                 |
| F256                     | 0.8        | 0.37                                            | 0.37                                            | 0.5                                  | 0.5                                             | 0.35                                 | 0.4                                  |
| F324 (T20,<br>T35)       | 0.65       | 0.275                                           | 0.275                                           | 0.335                                | 0.4                                             | 0.25                                 | 0.3                                  |
| F324 (T55,<br>T85, T120) | 0.65       | 0.275                                           | 0.275                                           | 0.38                                 | 0.4                                             | 0.25                                 | 0.3                                  |
| F400                     | 0.8        | 0.275                                           | 0.275                                           | 0.38                                 | 0.4                                             | 0.25                                 | 0.3                                  |
| F484                     | 0.8        | 0.35                                            | 0.35                                            | 0.45                                 | 0.5                                             | 0.35                                 | 0.4                                  |
| F576                     | 0.65       | 0.275                                           | 0.275                                           | 0.38                                 | 0.4                                             | 0.25                                 | 0.3                                  |

## Routing between Pads on the Top Layer

You can route signal trace between solder pads on the top layer of the PCB while meeting the clearance requirement.

**Figure 55: Routing Traces between Pads on the Top Layer**

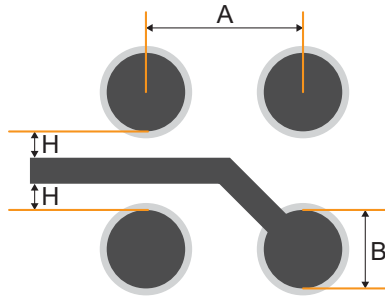

**Table 13: Routing Measurements**

| Measure-ment | Description                                                | Ball Count |       |       |      |      |                       |                                |      |      |      | Unit |
|--------------|------------------------------------------------------------|------------|-------|-------|------|------|-----------------------|--------------------------------|------|------|------|------|
|              |                                                            | F49        | W80   | F81   | F169 | F256 | F324<br>(T20,<br>T35) | F324<br>(T55,<br>T85,<br>T120) | F400 | F484 | F576 |      |
| A            | Ball pitch.                                                | 0.4        | 0.4   | 0.5   | 0.65 | 0.8  | 0.65                  | 0.65                           | 0.8  | 0.8  | 0.65 | mm   |
|              | Ball $\phi$ .                                              | 0.25       | 0.2   | 0.25  | 0.25 | 0.4  | 0.3                   | 0.3                            | 0.3  | 0.4  | 0.3  | mm   |
| B            | Width of the solder landing pad $\phi$ (SMD)               | 0.275      | 0.225 | 0.325 | 0.35 | 0.5  | 0.335                 | 0.38                           | 0.38 | 0.45 | 0.38 | mm   |
|              | Width of the solder landing pad $\phi$ (NSMD)              | 0.2        | 0.175 | 0.2   | 0.2  | 0.35 | 0.25                  | 0.25                           | 0.25 | 0.35 | 0.25 | mm   |
| H (min.)     | Minimum space between the trace and the landing pad (SMD)  | (4)        | (4)   | 0.05  | 0.08 | 0.08 | 0.1                   | 0.08                           | 0.1  | 0.1  | 0.08 | mm   |
|              | Minimum space between the trace and the landing pad (NSMD) | (4)        | (4)   | 0.08  | 0.1  | 0.1  | 0.1                   | 0.1                            | 0.1  | 0.1  | 0.1  | mm   |


<sup>(4)</sup> The via is under the pad, no traces between landing pads.

## Guidelines for Vias

You use vias to drop routing down to lower layers. This type of via, called an “offset via,” is very robust. The solder mask completely covers the via, which prevents short circuits during paste application, allows for paste overprinting, and prevents etch entrapment.

PCB fabricators use a laser drill for these size vias. Confirm that your fabricator can maintain the tight tolerances required to ensure adequate clearances between vias and pads.

**Figure 56: Via Dimensions**



**Table 14: Via Measurements**

| Measure-ment | Description                            | Ball Count |      |      |      |      |                       |                                |      |      |      | Unit |
|--------------|----------------------------------------|------------|------|------|------|------|-----------------------|--------------------------------|------|------|------|------|
|              |                                        | F49        | W80  | F81  | F169 | F256 | F324<br>(T20,<br>T35) | F324<br>(T55,<br>T85,<br>T120) | F400 | F484 | F576 |      |
| D            | Via capture pad width.                 | 0.16       | 0.16 | 0.22 | 0.3  | 0.4  | 0.3                   | 0.3                            | 0.3  | 0.4  | 0.3  | mm   |
| E            | Finished via $\phi$ .                  | 0.1        | 0.1  | 0.13 | 0.15 | 0.25 | 0.15                  | 0.2                            | 0.2  | 0.25 | 0.2  | mm   |
| F (min.)     | Space between the landing pad and via. | (5)        | (5)  | 0.08 | 0.12 | 0.11 | 0.14                  | 0.11                           | 0.14 | 0.12 | 0.11 | mm   |


<sup>(5)</sup> The via is under the pad, no traces between landing pads.

## Routing through Different PCB Layers

You can route a trace between two solder pads at the outer two rows of solder pads on the top layer. If you use all of the top-layer routing tracks to route the first and second rows, the inner rows of solder pads must connect to another routing layer with vias for routing outside of the BGA area.

You can use this method to route all of the inner solder pads. Because there is only enough space to route one trace between vias, you need an additional routing layer for every inner row of solder pads after the fourth row.

**Figure 57: BGA Trace Routing for Top and Second Layers**

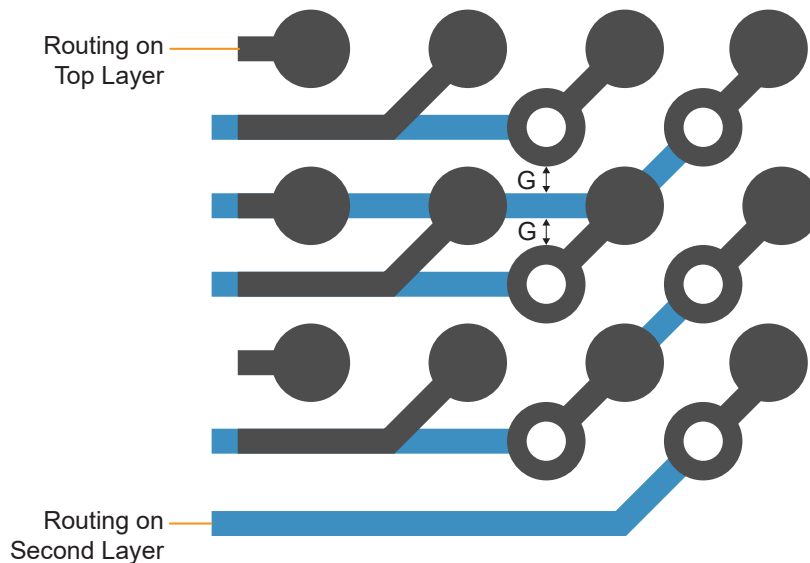

**Table 15: Routing Measurements**


| Measure-ment | Description                                           | Ball Count |      |       |      |      |                       |                                |      |      |      | Unit |
|--------------|-------------------------------------------------------|------------|------|-------|------|------|-----------------------|--------------------------------|------|------|------|------|
|              |                                                       | F49        | W80  | F81   | F169 | F256 | F324<br>(T20,<br>T35) | F324<br>(T55,<br>T85,<br>T120) | F400 | F484 | F576 |      |
| G (min.)     | Minimum space required between via trace and spacing. | 0.08       | 0.08 | 0.085 | 0.01 | 0.1  | 0.1                   | 0.1                            | 0.1  | 0.1  | 0.1  | mm   |

# PCB Guidelines for QFP Packages

## PCB Solder Pad (LQFP Packages)


Elitestek provides LQFP lead dimension information. Use this data when creating your board layout so that the board pads match the landing pads.

**Figure 58: Recommended PCB Landing Pad Guideline**

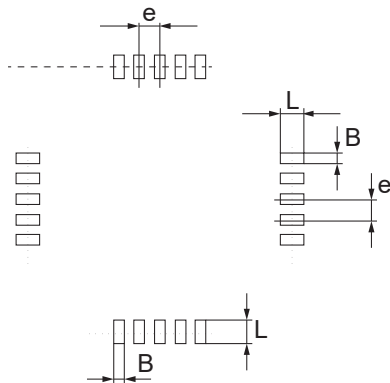

| Package      | L       | B       | e       |
|--------------|---------|---------|---------|
| LQFP 144-pin | 1.35 mm | 0.29 mm | 0.5 BSC |
| LQFP 100-pin | 1.35 mm | 0.29 mm | 0.5 BSC |

**Figure 59: LQFP Lead Dimensions**

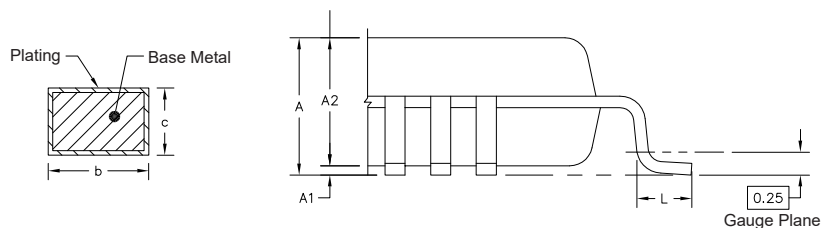

|                 | Symbol | Min  | Nom  | Max  |
|-----------------|--------|------|------|------|
| Total thickness | A      | —    | —    | 1.6  |
| Stand-off       | A1     | 0.05 | —    | 0.15 |
| Mold thickness  | A2     | 1.35 | 1.4  | 1.45 |
| Lead width      | b      | 0.17 | 0.22 | 0.27 |
| L/F thickness   | c      | 0.09 | —    | 0.2  |
|                 | L      | 0.45 | 0.6  | 0.75 |

## Trion® FPGAs Solder Ball

Refer to the table for the recommended type of solder ball used for Trion® FPGAs:

**Table 16: Trion® FPGAs Solder Ball**

| Device           | Solder Ball Type |
|------------------|------------------|
| T4/T8F49         | SAC105           |
| T4/T8F81         | SAC105           |
| T13/T20F169      | SAC105           |
| T13/T20F324      | SAC105 or SAC305 |
| T20W80           | SAC405           |
| T35F256          | SAC305           |
| T20/T35F324      | SAC1205          |
| T20/T35F400      | SAC1205          |
| T55/T85/T120F324 | SAC1205          |
| T55/T85/T120F484 | SAC105           |
| T55/T85/T120F576 | SAC1205          |

## Green Packaging

Elitestek FPGAs use packaging solutions that are safer for the environment. These packages are lead (Pb) free and are RoHS compliant. Elitestek refers to these products as "green" packaging.


# Tape and Reel Packaging

Elitestek offers BGA and WLCSP devices in tape and reel packaging.


**Table 17: Tape and Reel Packaging**

| Package | Carrier Width (mm) | Cover Width (mm) | Pitch (mm) | Reel Size (in) | Maximum Quantity per Reel |
|---------|--------------------|------------------|------------|----------------|---------------------------|
| FBGA49  | 12                 | 9.3              | 8          | 13             | 5,000                     |
|         | 12                 | 9.3              | 8          | 7              | 1,500                     |
| FBGA81  | 12                 | 9.3              | 8          | 13             | 5,000                     |
|         | 12                 | 9.3              | 8          | 7              | 1,500                     |
| WLCSP80 | 12                 | 9.5              | 8          | 13             | 2,500                     |

**Figure 60: Pin 1 Location (BGA49 and BGA81 Packages)**

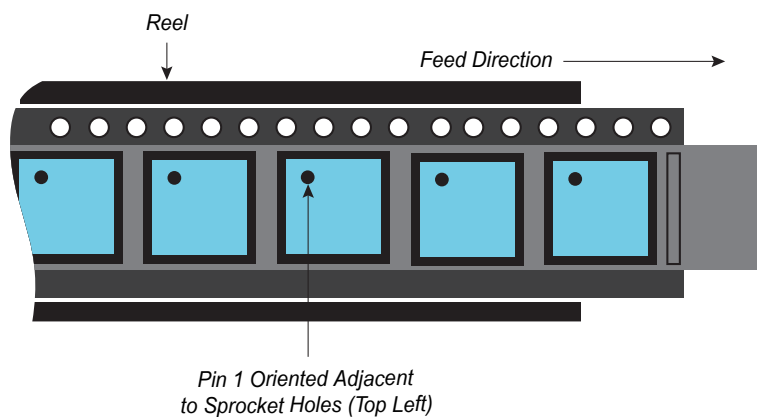




**Figure 61: Tape Outline (BGA49 Packages)**

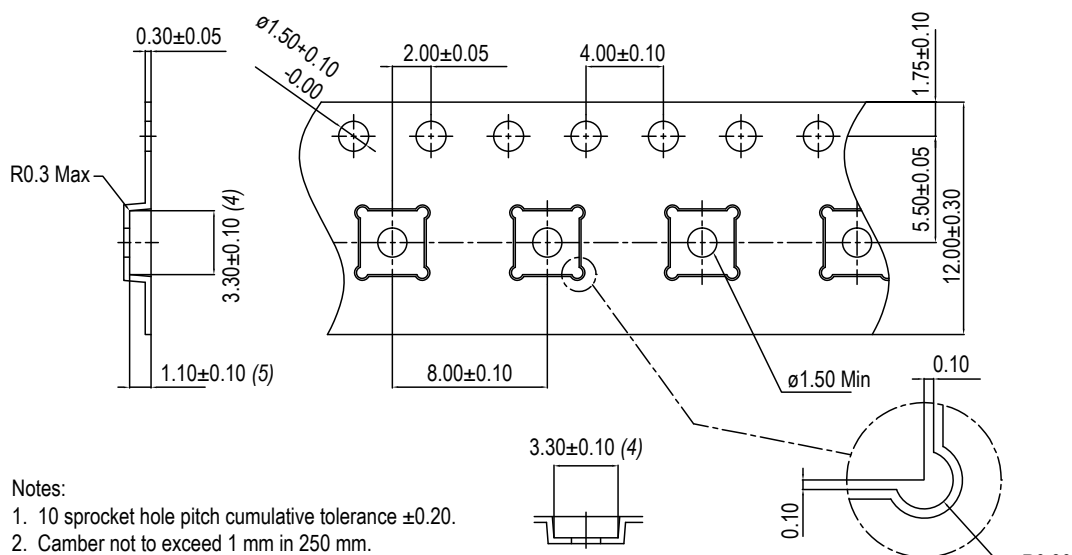

**Notes:**

1. 10 sprocket hole pitch cumulative tolerance  $\pm 0.20$ .
2. Camber not to exceed 1 mm in 250 mm.
3. Material is black, conductive polystyrene.
4. Measured on a plane 0.3 mm above the bottom of the pocket.
5. Measured from a plane on the inside bottom of the pocket to the top surface of the carrier.
6. Pocket position relative to sprocket hole measured as true position of pocket, not pocket hole.
7. Pocket center and pocket hole center must be the same position.

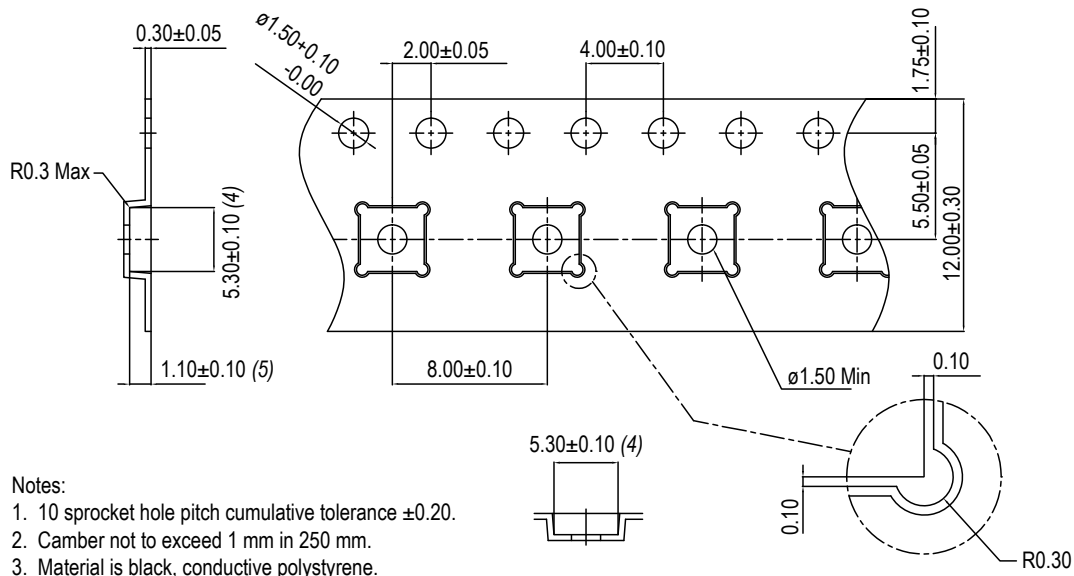**Figure 62: Tape Outline (BGA81 Packages)**

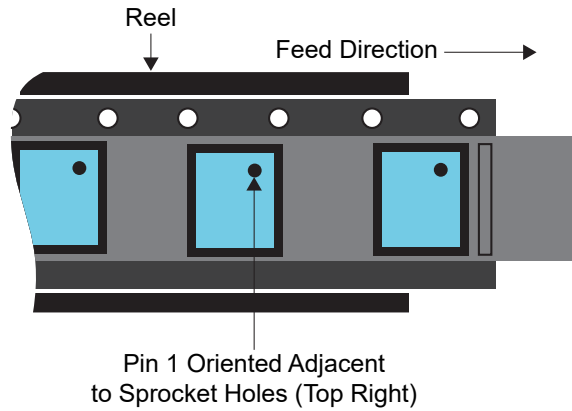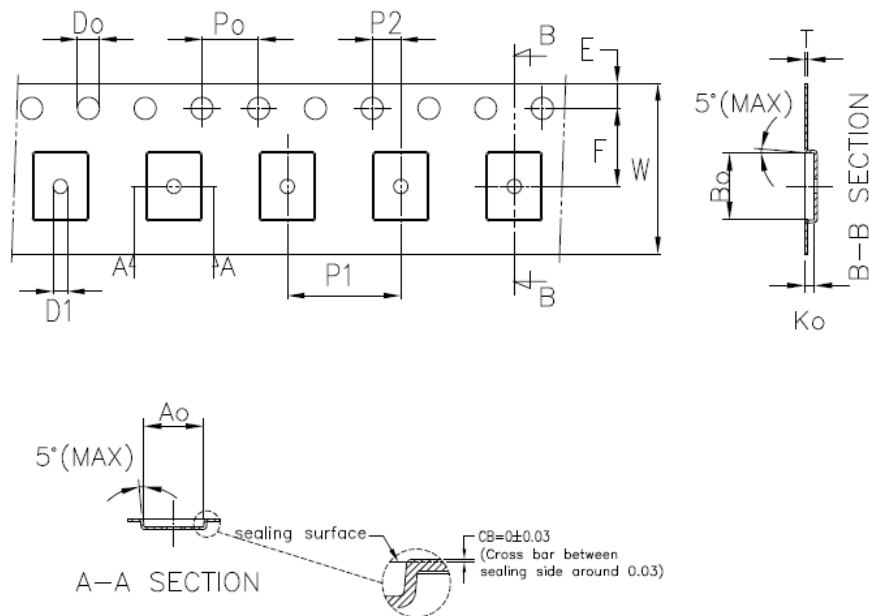**Figure 63: Pin 1 Location (WLCSP80 Packages)****Figure 64: Tape Outline (WLCSP80 Packages)**

Unit: mm

| Symbol | Ao        | Bo        | Ko                                  | Po        | P1        | P2        | T         |
|--------|-----------|-----------|-------------------------------------|-----------|-----------|-----------|-----------|
| Spec   | 3.76±0.05 | 4.66±0.05 | 0.66±0.05                           | 4.00±0.10 | 8.00±0.10 | 2.00±0.05 | 0.25±0.03 |
| Symbol | E         | F         | Do                                  | D1        | W         | 10Po      |           |
| Spec   | 1.75±0.10 | 5.50±0.05 | 1.50 <sup>+0.10</sup> <sub>-0</sub> | 1.00±0.05 | 12.0±0.30 | 40.0±0.20 |           |

**Notice:**

1. 10 Sprocket hole pitch cumulative tolerance is  $\pm 0.20\text{mm}$ .
2. Carrier camber shall be not more than 1mm per 250mm.
3. Ao & Bo measured on a place in the middle of corner radii.
4. Ko measured from a place on the inside bottom of the pocket to top surface of carrier.
5. Pocket position relative to sprocket hole measured as true position of pocket, not pocket hole.
6. Surface resistivity  $\geq 1.0 \times 10^3$  &  $\leq 1.0 \times 10^8$  ohm/sq.

# Tray Packaging

Elitestek offers BGA and LQFP devices in tray packaging.

**Table 18: Tray Packaging**

| Package | Quantity per Tray | Tray Matrix | Tray Stack | Minimum Quantity per Stack |
|---------|-------------------|-------------|------------|----------------------------|
| FBGA256 | 119               | 7 x 17      | 10 + 1     | 1,190                      |
| FBGA169 | 260               | 10 x 26     | 10 + 1     | 2,600                      |
| LQFP100 | 90                | 6 x 15      | 10 + 1     | 900                        |
| LQFP144 | 60                | 12 x 5      | 10 + 1     | 600                        |
| FBGA324 | 168               | 21 x 8      | 10 + 1     | 1,680                      |
| FBGA400 | 84                | 14 x 6      | 10 + 1     | 840                        |
| FBGA484 | 84                | 14 x 6      | 10 + 1     | 840                        |
| FBGA576 | 84                | 14 x 6      | 10 + 1     | 840                        |

# Revision History

**Table 19: Revision History**

| Date           | Version | Description                                                                                                                                                                                                                                                                                                                     |
|----------------|---------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| June 2025      | 5.3     | Added T35F256 specifications. (DOC-2420)<br>Standardized thermal resistance unit of measure across all Elitestek FPGAs.                                                                                                                                                                                                         |
| February 2025  | 5.2     | Fixed issue with wrong tables appearing in document. (DOC-2348)                                                                                                                                                                                                                                                                 |
| December 2024  | 5.1     | Changed co-planarity specification for T20 and T35 in F324 packages from 0.8 to 0.10 $\mu\text{m}$ . (DOC-2281)                                                                                                                                                                                                                 |
| February 2024  | 5.0     | Added in new section Trion® FPGAs Solder Ball. (DOC-1710)<br>Updated pinout descriptions.                                                                                                                                                                                                                                       |
| September 2023 | 4.9     | Updated CCK pin description. (DOC-1451)                                                                                                                                                                                                                                                                                         |
| August 2023    | 4.8     | Updated package outline for 49-Ball and 576-Ball FBGA Package Specifications.<br>Added in package thickness of 1.07mm for 324-Ball Package Specifications. (ADV-2307-001) (DOC-1350)                                                                                                                                            |
| June 2023      | 4.7     | Updated Trion T13/T20 Q100F3. (DOC-1164)                                                                                                                                                                                                                                                                                        |
| February 2023  | 4.6     | Corrected side view dimensions for F256 package. (DOC-813)<br>Corrected routing and via dimensions for the F169 package. (DOC-804)<br>Added 1,500 quantity tape and reel information for T4 and T8 FPGAs in BGA49 and BGA81 packages.<br>Added PCB data for F400 packages. (DOC-928)<br>Updated routing measurements. (DOC-928) |
| April 2022     | 4.5     | Corrected typo for pin A9 in BGA400 package pinout and I/O banks. (DOC-784)                                                                                                                                                                                                                                                     |
| March 2022     | 4.4     | Corrected typos for pins G6 and H15 in BGA400 package pinout and I/O banks. (DOC-756)<br>Noted that BGA324, BGA400, and BGA576 are flip-chip packages. (DOC-756)                                                                                                                                                                |
| March 2022     | 4.3     | Removed thermal pad from LQFP144 Recommended PCB Landing Pad Guideline; this package does not have a thermal pad. (DOC-751)                                                                                                                                                                                                     |
| February 2022  | 4.2     | Fixed typo in LQFP144 package pinout and I/O banks. Pin 31 was incorrectly marked as 34.                                                                                                                                                                                                                                        |
| February 2022  | 4.1     | Added recommended PCB landing pad guideline for LQFP packages.<br>Corrected color coding for VCCIO4A in the BGA169 I/O bank diagram. (DOC-719)<br>Correct the F (min.) via measurement for the BGA484 and BGA256 packages. (DOC-710)                                                                                            |
| December 2021  | 4.0     | Fix incorrect pin names for T55/T85/T120 FPGAs in the BGA324 package. (DOC-671)                                                                                                                                                                                                                                                 |
| November 2021  | 3.9     | Fixed incorrect color coding for I/O banks VCCIO_1F_1G in the BGA484 package. (DOC-639)                                                                                                                                                                                                                                         |
| November 2021  | 3.8     | Corrected symbols for pins L19 and R15 for the 400 BGA package. (DOC-564)                                                                                                                                                                                                                                                       |
| August 2021    | 3.7     | Corrected pin numbering for the WLCSP80 package. (DOC-504)<br>Corrected pitch for F576 in the PCB Solder Pad Recommendations table. (DOC-504)<br>Updated PCB solder pad recommendations (DOC-504)<br>Corrected pin A9 for F256 package pinout. (DOC-493)                                                                        |
| July 2021      | 3.6     | Rotated package outline, pinout, and I/O banks figures for the WLCSP80 to make it easier to identify pin 1.                                                                                                                                                                                                                     |
| June 2021      | 3.5     | Added thermal resistance data for WLCSP80 package. (DOC-439)<br>Added tape and reel information for WLCSP80. (DOC-439)<br>Added peak reflow temperature for WLCSP80.<br>Corrected typos in BGA256 pinout and fixed mislabeled banks in BGA256 I/O banks. (DOC-452)                                                              |
| December 2020  | 3.4     | Added WLCSP80 package information.                                                                                                                                                                                                                                                                                              |

| Date          | Version | Description                                                                                                                                                                                                                                         |
|---------------|---------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| August 2020   | 3.3     | Updated routing measurements and via measurements.                                                                                                                                                                                                  |
| July 2020     | 3.2     | Corrected the BGA169 pinout.                                                                                                                                                                                                                        |
| July 2020     | 3.1     | Updated solder ball co-planarity limit from 0.1 to 0.15.<br>Updated 81-ball FPGA package marking.                                                                                                                                                   |
| May 2020      | 3.0     | Added guidelines for traces, pads, and vias for PCB design.<br>Added BGA400 package information.<br>Updated side view BGA576 package dimensions.                                                                                                    |
| February 2020 | 2.1     | Fixed typos in BGA576 pinout and I/O bank diagrams.                                                                                                                                                                                                 |
| January 2020  | 2.0     | Added BGA324, BGA484, and BGA576 package information.                                                                                                                                                                                               |
| October 2019  | 1.6     | Added LQFP144 package information.                                                                                                                                                                                                                  |
| August 2019   | 1.5     | Updated BGA169 and BGA256 package marking.                                                                                                                                                                                                          |
| June 2019     | 1.4     | Added 169 ball FBGA package information.                                                                                                                                                                                                            |
| February 2019 | 1.3     | Added Thermal resistance, solder pad dimensions, and peak reflow data for the 256 BGA package.<br>Added information on tray packaging.<br>Clarified PLL ground pin in the 81 ball BGA diagram and pinout.<br>Updated 256 ball FBGA package marking. |
| November 2018 | 1.2     | Added 256 ball FBGA package information.                                                                                                                                                                                                            |
| August 2018   | 1.1     | Updated BGA81 pin figure.                                                                                                                                                                                                                           |
| July 2018     | 1.0     | Initial release.                                                                                                                                                                                                                                    |